



## Pressure Reducing Servo Pilot Valve, Plastic

### Model PC-S-P

This pilot combines all principal functions of a 2-way control circuit with elements of a 3-way control circuit. It is a direct acting pilot valve, actuated by a pressure responsive diaphragm, which seeks to reach equilibrium between hydraulic and set spring forces. A fully balanced trim ensures high accuracy and stability. When used in a pressure reducing circuit, the pilot modulates closed as downstream pressure rises above setting.

The pilot's unique internal design dynamically increases and decreases the main valve response speed in direct proportion to the discrepancy between actual and setting pressures.

### Features

- Integrated dynamic upstream flow restrictor
- Differential pressure sensing

### Typical Applications

- Pressure Reducing Valves sizes 1½-4" (Standard model PC-S-P)
- Flow Control Valves sizes 1½-4" (Modified to differential sensing PC-SD-P)
- Pressure Sustaining Valves sizes 1½-4" (Standard model connected as Pressure Sustaining Pilot)
- Differential Pressure Sustaining Valves sizes 1½-4" (Modified to PC-S-P-D and connected as Pressure Sustaining Pilots)

### Technical Data

**Pressure Rating:** 10 bar; 145 psi

**Working Temperature:** Water up to 50°C; 122°F

**Flow Factor:** Kv 0.08 m³/h @ 1bar ΔP; Cv 0.09 GPM @ 1psi ΔP

**Standard Materials:**

**Body & Cover:** Polyamide 6 + 30% F.G.

**Elastomers:** NBR

**Internals:** Stainless Steel & Brass

**Spring:** Stainless Steel


**Ports:** ½" NPT

### Adjustment Range

Spring	Pressure		
	bar	psi	
K-Grey	0.5-3	7-40	Standard
J-Green	0.2-1.7	3-25	Optional

### Connections

- 0 - Upstream for reducing, Downstream for Sustaining
- 1 - Sensing
- 2 - Downstream for reducing, Upstream for sustaining
- 3 - Valve control chamber

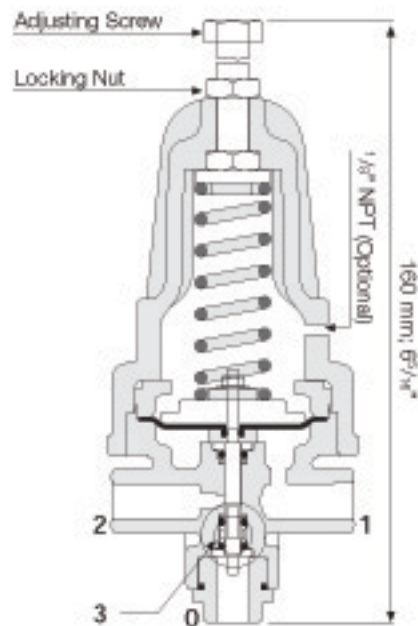

Weight: 0.2 Kg; 0.44 lbs.