

# Pressure Reducing and Sustaining Automatic Metering Valve (AMV)


IR-923-D2-R

The BERMAD Model IR-923-D2-R integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. The BERMAD AMV performs three independent functions. It sustains the preset minimum upstream pressure; it reduces downstream pressure to a constant preset maximum, and it automatically shuts itself after accurately delivering a preset quantity of water.



## Features and Benefits

- Integrated "All-in-One" Control Valve
  - Saves space, cost and maintenance
- Easy Modification to Mechanical Drive Hydrometer
  - Adaptable to future computerized systems
- Hydraulic Pressure & Batch Control
  - Protects downstream systems
  - Line pressure driven
  - Sustains supply pressure and Controls system fill-up
  - Non-computerized quantity follow-up and control
- Internal Inlet & Outlet Flow Straighteners
  - Saves on straightening distances
  - Maintains accuracy
- Integrated Flow Metering Calibration Device
  - Measurement precision to  $\pm 2\%$
- User-Friendly Design
  - Easy pressure-level and dose setting
  - Simple in-line inspection and service

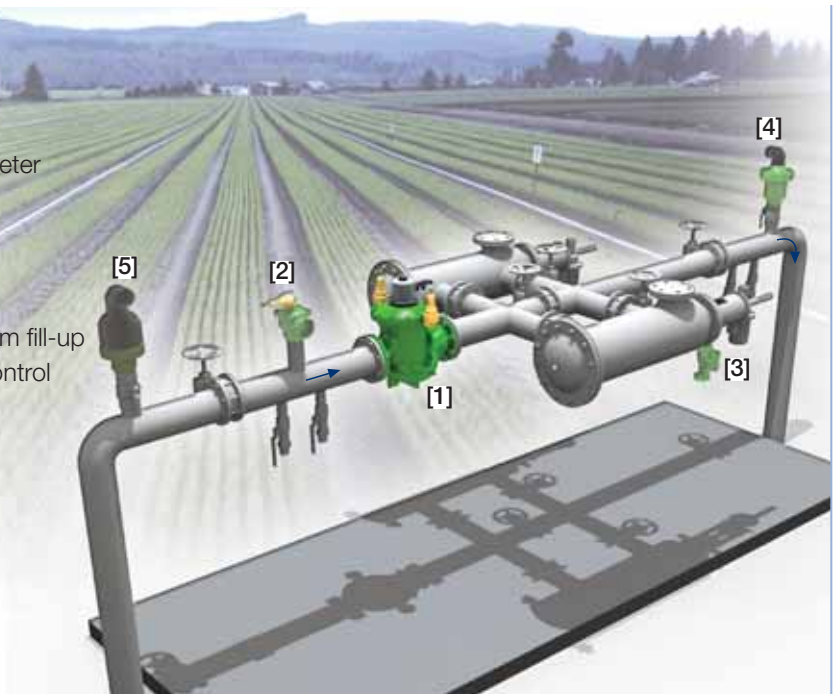


## Typical Applications

- Semi-Automatic Irrigation
- Manual Irrigation Intended for Computerization
- Pressure Zone Prioritizing
- Line Fill-Up Control
- Pressure Reducing Systems
- Filter Stations
- Volumetric Irrigation Systems

- [1] BERMAD Model IR-923-D2-R sustains filter back flush pressure, reduces system pressure, and delivers precise water quantity
- [2] BERMAD Model IR-43Q-R
- [3] BERMAD Model IR-405
- [4] BERMAD Air Valve Model ARC-A-I-I
- [5] BERMAD Air Valve Model ARC-A-P-I

# BERMAD Irrigation



## IR-923-D2-R

For full technical details, refer to Engineering Section.


## 900 Series

Pressure Reducing

### Technical Specifications

#### Dimensions and Weights

Size	DN Inch	80 3	100 4	150 6	200 8	250 10
L	mm	300	350	500	600	600
	inch	11.8	13.8	19.7	23.6	23.6
H	mm	405	470	625	640	640
	inch	15.9	18.5	24.6	25.2	25.2
C	mm	290	340	450	465	465
	inch	11.4	13.4	17.7	18.3	18.3
R	mm	123	137	216	228	228
	inch	4.8	5.4	8.5	9	9
A; B	mm	305	325	390	390	415
	inch	12	12.8	15.4	15.4	16.3
Weight	Kg	23	31	71	93	141
	lb.	57.7	68.3	156.5	205	310.9



#### Accuracy & Flow Data (ISO 4064-I, Class A)

Size	Accuracy	DN inch	80 3	100 4	150 6"	200 & 250 8 & 10
Q min (Minimum flow)	5%	m <sup>3</sup>	3.2	4.8	10	12
		gpm	14.1	21.1	44	52.8
Qn, ISO 4064-1 (Nominal flow)	2%	m <sup>3</sup>	40	60	150	250
		gpm	176	264	660	1100
Qper=Q3 (Permanent flow)	2%	m <sup>3</sup>	100	160	250	400
		gpm	440	704	1100	1760

#### Dial Options

Capacity	Cubic Meter (m <sup>3</sup> )										1000 Gallon													
	40	80	120	150	200	250	350	600	800	1,200	2,100	3,500	6,000	8,000	13	50	130	2,500	5,000	10,000	20,000	870	1,300	2,000
Graduation	Cubic Meter (m <sup>3</sup> )										Gallon													
	1	1	2	2	5	10	10	20	50	100	100	100	100	100	100	1000	2,500	5,000	10,000	20,000	25,000	25,000	25,000	25,000
3"	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
4"	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6"	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
8" & 10"	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

### Technical Data

#### Patterns and Sizes:

Globe: 3-10"; DN80-250  
 Angle 90°: 3-8"; DN80-200  
 Angle 120°: 4"; DN100

#### End Connections:

Flanged: 3-10"; DN80-250

Pressure Ratings: 16 bar; 232 psi

Minimum Operating Pressure:

0.5 bar; 7 psi

#### Setting Range:

Reducing: 1-10 bar; 15-145 psi

Sustaining: 1-16 bar; 15-232 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

#### Materials:

##### Body and Cover:

Polyester Coated Cast or Ductile Iron

##### Internals:

St. St. & Glass Fiber Reinforced Nylon

Impeller: Polypropylene

Elastomers: Reinforced NR & NBR


Pivots and Bearings: Tungsten Carbide

Control Accessories: Brass


Tubing and Fittings:

Reinforced Plastic and Brass

### Flow Chart

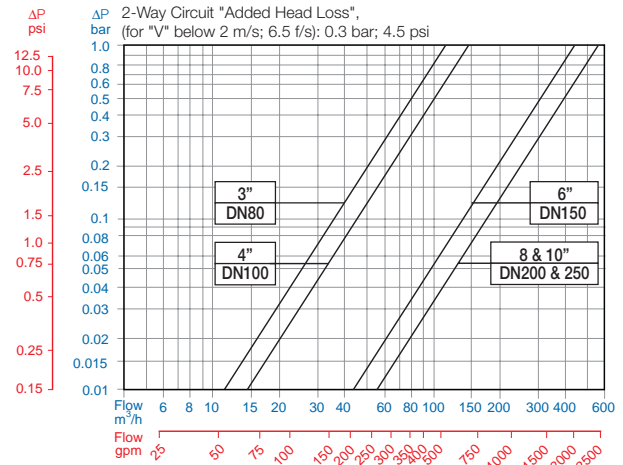

### Operation

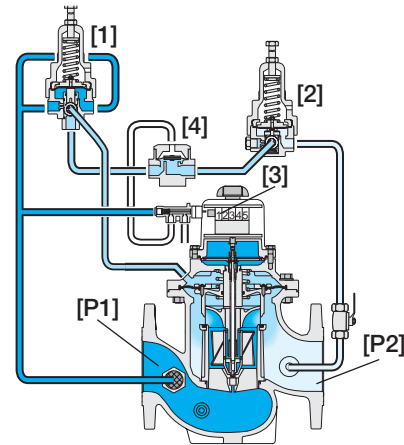

The Pressure Sustaining Pilot [1] commands the AMV to throttle closed should Upstream Pressure [P1] drop below setting, and to modulate open when [P1] rises above it. When [P1] is high, the Pressure Reducing Pilot [2] commands the AMV to prevent Downstream Pressure [P2] from rising above setting. Upon delivering manually preset dose, the Shut-off Pilot [3] closes the AMV by pressurizing the Hydraulic Relay Valve [4].

### How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	3-10"	923	D2	00	G	I	16	PG	-	PB	800	NPS	R
Globe Angle 120 (4"; DN100 only)		G A H	Plastic Tubing & Brass Fittings Copper Tubing & Brass Fittings		PB CB	40 m <sup>3</sup> 80 m <sup>3</sup> 120 m <sup>3</sup> 150 m <sup>3</sup> 200 m <sup>3</sup> 350 m <sup>3</sup> 600 m <sup>3</sup> 800 m <sup>3</sup> 1,200 m <sup>3</sup> 2,100 m <sup>3</sup> 3,500 m <sup>3</sup>	040 080 120 150 200 350 600 800 1K0 2K0 3K0	6,000 m <sup>3</sup> 8,000 m <sup>3</sup> 13,000 Gal. 50,000 Gal. 130,000 Gal. 200,000 Gal. 510,000 Gal. 875,000 Gal. 1,300,000 Gal. 2,100,000 Gal.	6K0 8K0 1G0 5G0 1KG 2KG 5KG 8KG 1MG 2MG	Metal Control Accessories Homologation Approved Other attributes available on request	R L		
ISO-16			16										
ISO-10			10										
ISO-14 (ISO-10/4 Holes)			14										
ANSI-125			A1										
JIS-10			J1										
BST-D			BD										



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC9AED2-23R 05