

Flow Control Valve with Solenoid Control

- Limiting consumers over demand
- Controlling pipeline fill rate
- Pump overload & cavitation protection
- Switching between “on-duty” valves
- Selecting system flow regime

The Model 770-55-U Flow Control Valve with Solenoid Control is a hydraulically operated, diaphragm actuated control valve that maintains preset maximum flow, regardless of fluctuating demand or varying system pressure. The valve opens and shuts off in response to an electric signal.




Features and Benefits

- **Line pressure driven** – Independent operation
- **Hydraulic flow sensor (upstream installation)**
 - No moving parts
 - No electronic components
 - No need for flow straightening
- **Solenoid controlled**
 - Low power consumption
 - Wide ranges of pressure and voltages
 - Normally Open, Normally Closed or Last Position
- **In-line serviceable** – Easy maintenance
- **Double chamber design**
 - Moderated valve reaction
 - Protected diaphragm
- **Semi-straight flow** – Non-turbulent flow
- **Stainless Steel raised seat** – Cavitation damage resistant
- **Obstacle free, full bore** – Uncompromising reliability
- **V-Port Throttling Plug** – Low flow stability

Major Additional Features

- Flow control (constant downstream pressure) – 727-U
- Solenoid control & check feature – 770-25-U
- High sensitivity pilot – 770-55-12-U
- Pressure Reducing – 772-U
- Electric override – 770-59-U
- Level & flow control valve – 757-U
- Pump & flow control valve – 747-U
- Electronic control valve – 718-03

See relevant BERMAD publications.



Operation


The Model 770-55-U is a pilot controlled valve equipped with an adjustable, 2-Way flow pilot, an orifice assembly, and a solenoid pilot.

The needle valve [1] continuously allows flow from valve inlet into the upper control chamber [2]. The pilot [3] senses the differential pressure across the orifice plate [4], and together with the solenoid [5], controls outflow from the upper control chamber. Should orifice differential pressure rise above pilot setting, the pilot throttles, enabling pressure to accumulate in the upper control chamber, causing the main valve to throttle closed, thereby limiting flow to the pilot setting.

Should orifice differential pressure fall below pilot setting, the pilot releases accumulated pressure causing the main valve to modulate open.

Should the solenoid close, pressure in the upper control chamber accumulates causing the main valve to shut off. Normally Closed, Normally Open and Last Position models are available.

The needle valve controls the closing speed. The downstream cock valve [6] enables manual closing.

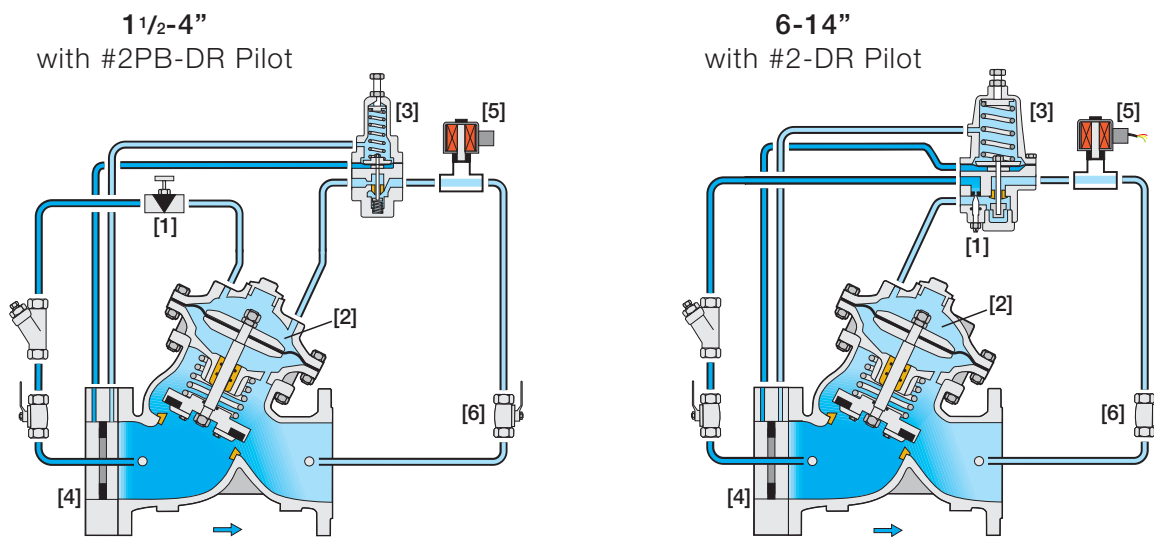

Note: For 16" and larger valves, see "Pilot Valve Selection" table at the last page of Model 770-U.

Engineer Specifications


The Flow Control Valve shall maintain pre-set maximum flow, regardless of fluctuating demand or varying system pressure and shall open or shut off in response to an electric signal.

Main Valve: The main valve shall be a center guided, diaphragm actuated globe valve of either oblique (Y) or angle pattern design. The body shall have a replaceable, raised, stainless steel seat ring. The valve shall have an unobstructed flow path, with no stem guides, bearings, or supporting ribs. The body and cover shall be ductile iron. All external bolts, nuts, and studs shall be Duplex® coated. All valve components shall be accessible and serviceable without removing the valve from the pipeline.

Actuator: The actuator assembly shall be double chambered with an inherent separating partition between the lower surface of the diaphragm and the main valve. The entire actuator assembly (seal disk to top cover) shall be removable from the valve as an integral unit. The stainless steel valve shaft shall be center guided by a bearing in the separating partition. The replaceable radial seal disk shall include a resilient seal and shall be capable of accepting a V-Port Throttling Plug by bolting.

Control System: The control system shall consist of a 2-Way adjustable, direct acting flow pilot valve, an orifice plate, a 2-Way solenoid pilot, a needle valve, isolating cock valves, and a filter. The orifice shall be attached to main valve inlet. All fittings shall be forged brass or stainless steel. The assembled valve shall be hydraulically tested and factory adjusted to customer requirements.

Quality Assurance: The valve manufacturer shall be certified according to the ISO 9001 Quality Assurance Standard. The main valve shall be certified as a complete drinking water valve according to NSF, WRAS, and other recognized standards.




Typical Applications

Parallel Valve Installation

In a distribution network, there is often a need to respond to several flow regimes. In flow control valves, the orifice limits the valve adjustment range to about $\pm 15\%$. Parallel installation of two Model 770-55-U valves enable:

- Flow limiting for various flow regimes
- Equalizing operating hours between valves

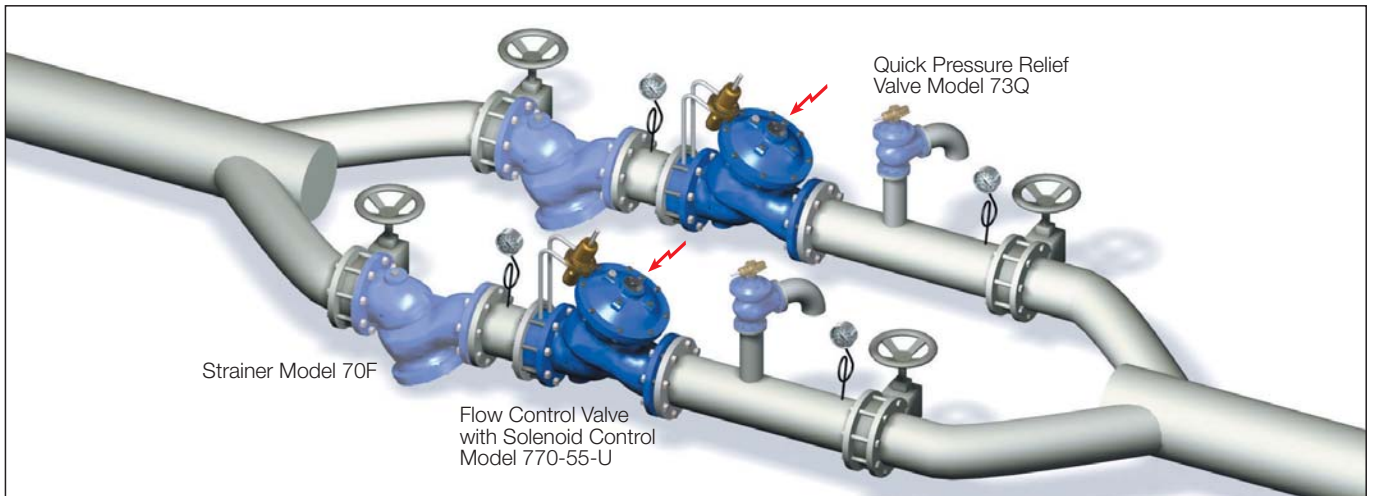


Filtration Systems

In a filter battery, installed as part of a water treatment system, excessive flow through any of the filters might cause:

- Unequal filter loading and blocking
- Reduced filter efficiency
- Structural damage to the filter element

The Model 770-55-U [V2] maintains the pre-set maximum flow through each of the filters. The solenoid control enables disconnecting each filter (in turn) from the filtration process allowing periodic back flushing.

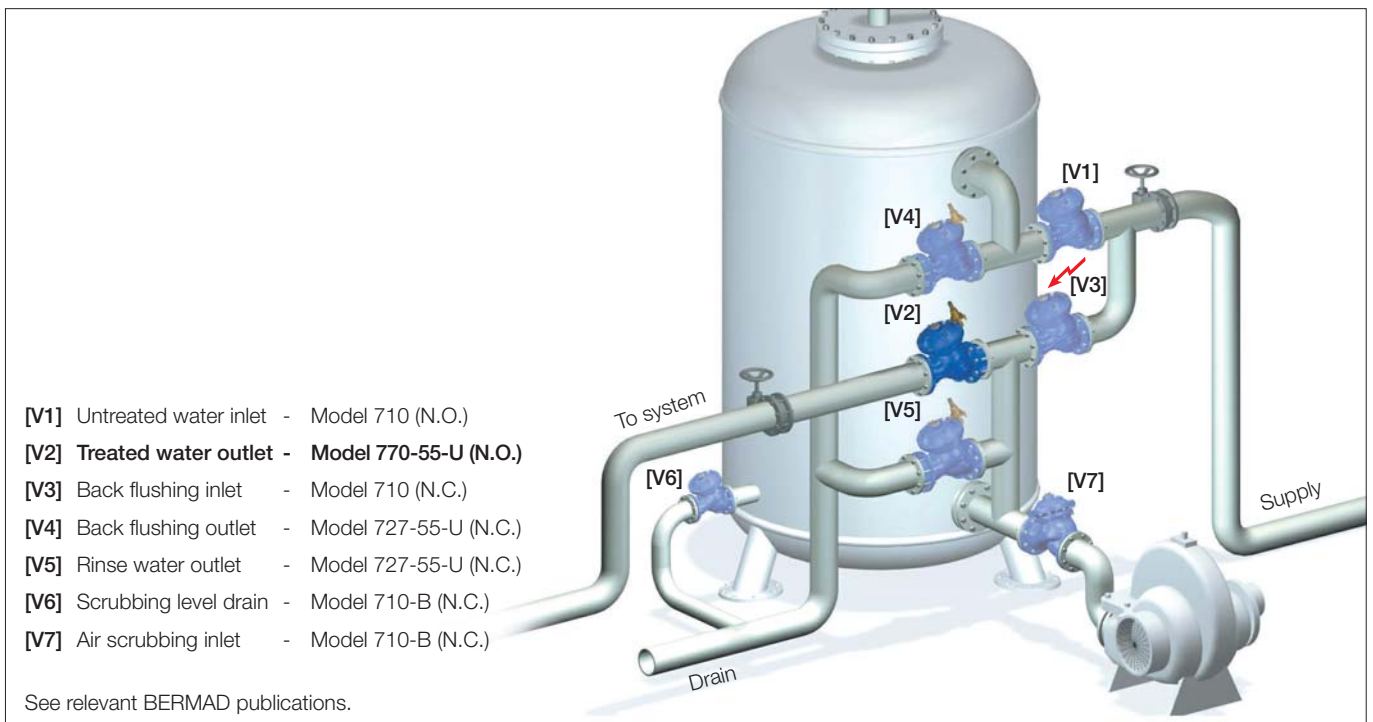




700 Series Model 770-55-U

Technical Data


Dimensions and Weights

Size	A, B		C		L		H		Weight		
	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	
40	1 1/2"	350	14	180	7	205	8.1	239	9.4	9.1	20
50	2"	350	14	180	7	210	8.3	244	9.6	10.6	23
65	2 1/2"	350	14	180	7	222	8.7	257	10.1	13	29
80	3"	370	15	230	9	250	9.8	305	12.0	22	49
100	4"	395	16	275	11	320	12.6	366	14.4	37	82
150	6"	430	17	385	15	415	16.3	492	19.4	75	165
200	8"	475	19	460	18	500	19.7	584	23.0	125	276
250	10"	520	21	580	23	605	23.8	724	28.5	217	478
300	12"	545	22	685	27	725	28.5	840	33.1	370	816
350	14"	545	22	685	27	733	28.9	866	34.1	381	840
400	16"	645	26	965	38	990	39.0	1108	43.6	846	1865
450	18"	645	26	965	38	1000	39.4	1127	44.4	945	2083
500	20"	645	26	965	38	1100	43.3	1167	45.9	962	2121

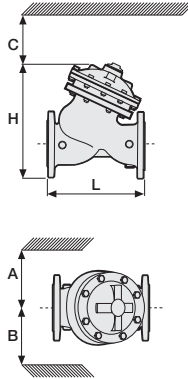

The orifice assembly adds 20 mm to valve length.
Data is for Y-pattern, flanged, PN16 valves
Weight is for PN16 basic valves
"C" enables removing the actuator in one unit
"L", ISO standard lengths available
For more dimensions and weights tables, refer to Engineering Section

Flow Chart

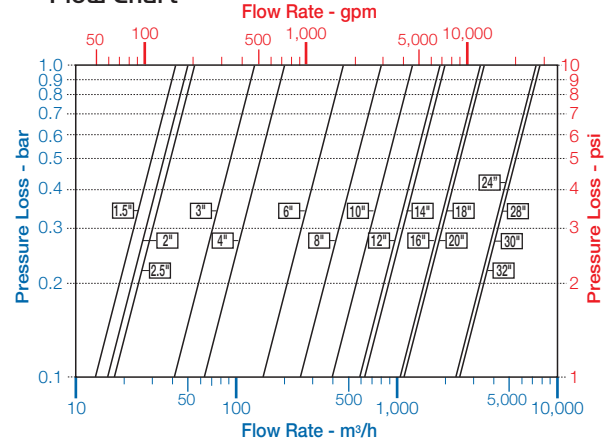

Data is for Y-pattern, flat disk valves
For more flow charts, refer to Engineering Section

Main Valve

Valve Patterns: "Y" (globe) & angle
Size Range: 1 1/2"-32" (40-800 mm)
End Connections (Pressure Ratings):
Flanged: ISO PN16, PN25 (ANSI Class 150, 300)
Threaded: BSP or NPT
Others: Available on request
Working Temperature:
Water up to 80°C (180°F)
Standard Materials:
Body & Actuator: Ductile Iron
Internals:
Stainless Steel, Bronze & coated Steel
Diaphragm:
NBR Nylon fabric-reinforced
Seals: NBR
Coating:
Fusion Bonded Epoxy, RAL 5005 (Blue)
NSF & WRAS approved or Electrostatic Polyester Powder, RAL 6017 (Green)

Control System

Standard Materials:
Accessories:
Bronze, Brass, Stainless Steel & NBR
Tubing: Copper or Stainless Steel
Fittings: Forged Brass or Stainless Steel
Pilot Standard Materials:
Body: Brass, Bronze or Stainless Steel
Elastomers: NBR
Springs: Galvanized Steel or Stainless Steel
Internals: Stainless Steel

- For "Flow Pilot Valve Selection" table, refer to the Model 770-U.
- When minimum head loss is essential and flow velocity is higher than 1.0 m/sec, consider using the Model 770-j equipped with a pitot tube flow sensor and high sensitivity flow pilot #7.

Solenoid Standard Materials:

Body: Brass or Stainless Steel
Elastomers: NBR or FPM
Enclosure: Molded epoxy
Solenoid Electrical Data:
Voltages:
(ac): 24, 110-120, 220-240, (50-60 Hz)
(dc): 12, 24, 110, 220
Power Consumption:
(ac): 30 VA, inrush; 15 VA (8W), holding or 70 VA, inrush; 40 VA (17.1W), holding
(dc): 8-11.6W
Values might vary according to specific solenoid model
Orifice Assembly Standard Materials:
Body: Fusion bonded epoxy Steel or Stainless Steel
Orifice Plate: Stainless Steel
Sensing Ports: 1/8" NPT

- Standard (calculated) differential pressure: 0.4 bar (5.5 psi)

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide)

Sector	Size	Primary Feature	Additional Feature	Pattern	Body Material	End Connections	Coating	Voltage & Position	Tubing & Fittings	Additional Attributes
WW	6"	770	55	Y	C	16	EB	4AC	CB	UI
Waterworks	1 1/2" - 32"	Flow Control		Oblique (up to 20") Angle (up to 18") Globe (24-32" only)	Y A G	Epoxy FB Blue Polyester Green Polyester Blue Uncoated	EB PG PB UC	Copper Tubing & Brass Fittings Plastic Tubing & Brass Fittings St. St. 316 Tubing & Fittings	CB PB NN	
No Additional Feature			00	Ductile Iron Standard Cast Steel St. Steel 316 Nickel Alumin. Bronze	C S N U	24VAC/50Hz - N.C. 24VAC/50Hz - N.O. 24VDC - N.C. 24VDC - N.O. 24VDC - L.P. 220VAC/50-60Hz N.C. 220VAC/50-60Hz N.O.	4AC 4AO 4DC 4DO 4DP 2AC 2AO	Valve Position Indicator Large Control Filter Orifice Assembly V-Port Throttling Plug Electric Limit Switch Valve Position Transmitter St. St. 316 Control Accessories St. St. 316 Internal Trim (Closure & Seat) St. St. 316 Actuator Internal Assembly Delrin Bearing Viton Elastomers for Seals & Diaphragm Pitot Tube	I F U V S Q N T D R E j	
Closing and Opening Speed-Control			03							
High sensitivity pilot			12	ISO-16	16					
Check Valve			20	ISO-25	25					
Solenoid Controlled & Check Valve			25	ANSI-150	A5					
Hydraulic Control			50	ANSI-300	A3					
Solenoid Controlled			55	JIS-16	J6					
Electric Override			59	JIS-20	J2					

Multiple choices permitted

Multiple choices permitted

