

## Pressure Reducing Automatic Metering Valve (AMV)


IR-920-D0-KX

The BERMAD Pressure Reducing Automatic Metering Valve integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. Equipped with a Mechanic Shut-Off Pilot and a Pressure Reducing Pilot, the BERMAD Model IR-920-D0-KX reduces higher upstream pressure to lower constant downstream pressure and opens fully upon line pressure drop. It automatically shuts itself after accurately delivering a preset quantity of water.



### Features and Benefits

- Integrated "All-in-One" Control Valve
  - Saves space, cost and maintenance
- Easy Modification to Mechanical Drive Hydrometer
  - Adaptable to future computerized systems
- Hydraulic Pressure and 3-Way Batch Control
  - Line pressure driven
  - Protects downstream systems
  - Opens fully upon line pressure drop
  - Non-computerized quantity follow-up and control
- Internal Inlet & Outlet Flow Straighteners
  - Saves on straightening distances
  - Maintains accuracy
- Integrated Flow Metering Calibration Device
  - Measurement precision to  $\pm 2\%$
- User-Friendly Design
  - Easy pressure and dose setting
  - Simple in-line inspection and service

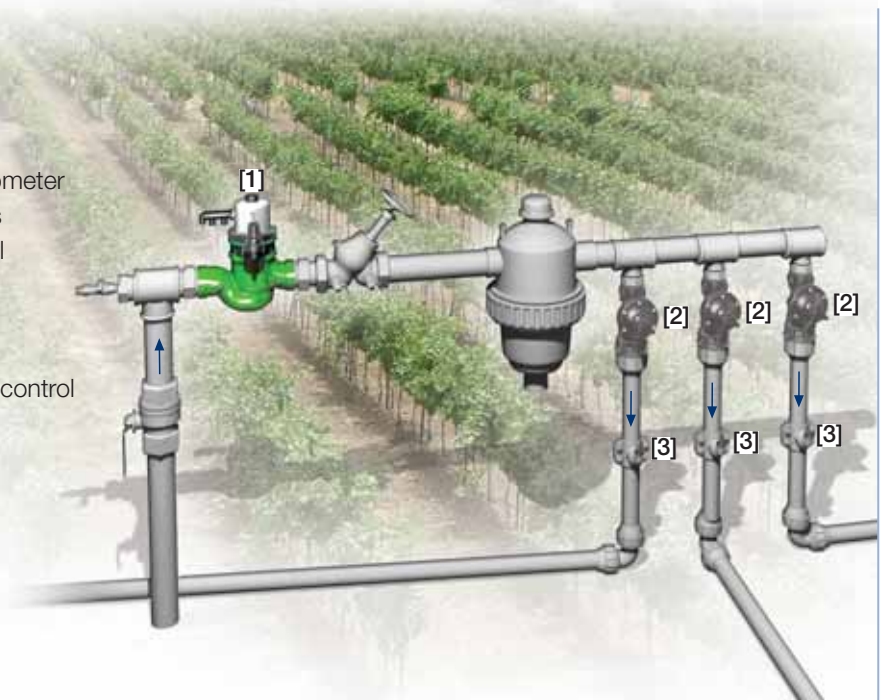


### Typical Applications

- Semi-Automatic Irrigation
- Manual Irrigation intended for computerization
- Pressure Reducing Stations
- Systems liable to varying supply pressure
- Volumetric Irrigation Systems

- [1] BERMAD Model IR-920-D0-KX reduces pressure to protect filter and system, and delivers precise water quantity  
[2] BERMAD Pressure Reducing Valve Model IR-220-bKZ  
[3] BERMAD Vacuum Breaker Model 1/2"-ARV

# BERMAD Irrigation



## IR-920-DO-KX

For full technical details, refer to Engineering Section.


## 900 Series

Pressure Reducing Standard

### Technical Specifications

#### Dimensions and Weights

Size	DN Inch	40-T 1 1/2-T	50-T 2-T	80R-T 2A-T	80R-F 3R-T	80-F 4R-F	80A-F 3-F	100-F 3A-F	100-F 4-F	100A-F 4A-F
<b>Lg</b>	mm inch	250 9.8	250 9.8	N.A. N.A.	250 9.8	310 12.2	300 11.8	N.A. N.A.	350 13.8	N.A. N.A.
<b>La</b>	mm inch	N.A. N.A.	N.A. N.A.	120 4.7	N.A. N.A.	N.A. N.A.	N.A. N.A.	150 5.9	N.A. N.A.	180 7.1
<b>H</b>	mm inch	293 11.5	300 11.8	322 12.7	300 11.8	298 11.7	405 15.9	425 16.7	470 18.5	500 19.7
<b>C</b>	mm inch	210 8.3	210 8.3	210 8.3	210 8.3	225 8.9	285 11.2	285 11.2	365 14.4	365 14.4
<b>h</b>	mm inch	95 3.7	95 3.7	125 4.9	79 3.1	100 3.9	123 4.8	196 7.7	137 5.4	225 8.9
<b>M*</b>	mm inch	67 2.6	77 3.0	N.A. N.A.	N.A. N.A.	N.A. N.A.	N.A. N.A.	N.A. N.A.	N.A. N.A.	N.A. N.A.
<b>Weight</b>	Kg lb.	6.8 15	8.8 19.4	8.1 17.4	7.3 16.1	16 35.3	26.0 57.3	25.8 56.2	37.0 81.6	36.1 78.9

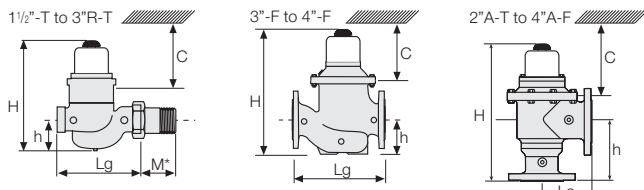

#### Accuracy & Flow Data (ISO 4064-I, Class A)

Size	Accuracy	DN inch	40 1 1/2	50 2	80R 80R	80 3	100 4
<b>Q min (Minimum flow)</b>	5%	m <sup>3</sup> gpm	0.8 3.5	0.8 3.5	1.2 5.3	1.2 5.3	1.8 7.9
<b>Qn, ISO 4064-1 (Nominal flow)</b>	2%	m <sup>3</sup> gpm	15 66	15 66	17 75	40 176	60 264
<b>Qper=Q3 (Permanent flow)</b>	2%	m <sup>3</sup> gpm	25 110	40 176	40 176	100 440	160 704

#### Dial Options

Capacity	Cubic Meter (m <sup>3</sup> )										1000 Gallon					
	40	80	120	150	200	350	600	800	1,200	2,100	13	50	130	200	500	870
<b>Graduation</b>	Cubic Meter (m <sup>3</sup> )										Gallon					
	1	1	2	2	5	10	10	10	20	50	100	1000	2,500	5,000	10,000	20,000
1 1/2" & 2"	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
3"R		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
3"			■	■	■	■	■	■	■	■	■	■	■	■	■	■
4"				■	■	■	■	■	■	■	■	■	■	■	■	■

### Technical Data

**Pressure Rating:** 10 bar; 145 psi

**Minimum Operating Pressure:** 0.5 bar; 7 psi

For lower pressure requirements, consult factory

**Setting Range:** 1-7 bar; 15-100 psi


Setting ranges vary according to specific pilot spring. Please consult factory.

### How to Order


Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	1 1/2-4"	920	DO	00	G	I	BP	PG	-	PP	120	NPS	KX
Other sizes available on request.													
Globe		G											K
Angle 90°		A											X
120° (2 1/2" & 4" only)		H											L
BSP (1 1/2, 2 & 3"R only)			BP										
NPT (1 1/2, 2 & 3"R only)			NP										
ISO-16			16										
ISO-10			10										
ISO-14 (ISO-10/4 Holes)			14										
ANSI-125			A1										
JIS-10			J1										
BST-D			BD										
				Plastic Tubing & Fittings		PP							
				Plastic Tubing & Brass Fittings		PB							
							40 m <sup>3</sup>	040		2,100 m <sup>3</sup>	2K0		Plastic Control Accessories
							80 m <sup>3</sup>	080		3,500 m <sup>3</sup>	3K0		3-Way Control
							120 m <sup>3</sup>	120		13,000 Gal.	1G0		Homologation Approved
							150 m <sup>3</sup>	150		50,000 Gal.	5G0		
							200 m <sup>3</sup>	200		130,000 Gal.	1KG		
							350 m <sup>3</sup>	350		200,000 Gal.	2KG		
							600 m <sup>3</sup>	600		510,000 Gal.	5KG		
							800 m <sup>3</sup>	800		875,000 Gal.	8KG		
							1,200 m <sup>3</sup>	1K0					Other attributes available on request

#### Flow Chart

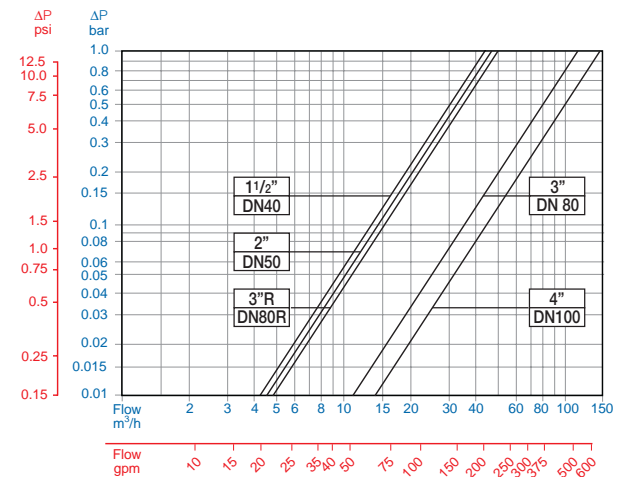

#### Operation

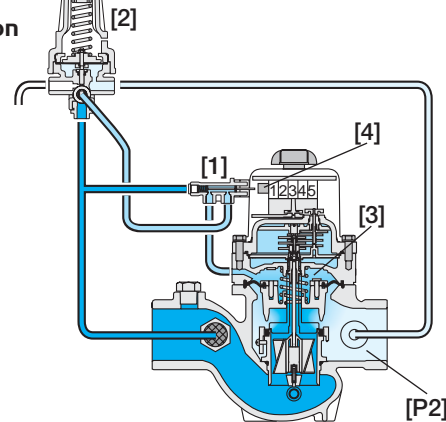

The Shut-Off Pilot (SOP) [1] connects the Pressure Reducing Pilot (PRP) [2] to the AMV Control Chamber [3]. The PRP commands the AMV to throttle closed should Downstream Pressure [P2] rise above setting and to open fully when it drops below setting. Upon delivering the preset quantity of water, the AMV manually preset Control Head Mechanism [4] switches the SOP, which directs line pressure into the control chamber causing the AMV to shut.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAID shall not be held liable for any errors. All rights reserved. © Copyright by BERMAID. PC9AED0-20KX 05