

Pressure Reducing and Sustaining Hydrometer

**Magnetic Drive
with Hydraulic Control**

IR-923-M0-50-R

The BERMAD Model IR-923-M0-50-R integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. As the system's Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD Hydrometer sustains the preset minimum upstream pressure; reduces downstream pressure to a constant preset maximum, and either opens or shuts in response to remote pressure commands.



Features and Benefits

- Integrated "All-in-One" Control Valve
 - Saves space, cost and maintenance
- Line Pressure Driven, Hydraulically Controlled On/Off
 - Protects downstream system
 - Prioritizes pressure zones
 - Controls system fill-up
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch and Opto pulse-generating modes
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
- User-Friendly Design
 - Simple in-line inspection and service



Typical Applications


- Computerized Irrigation Systems
- Flow Monitoring & Leakage Control
- Line Fill-Up Control
- Line Emptying Prevention
- Pressure Reducing Stations
- Filter Stations
- Irrigation Machines

[1] BERMAD Model IR-923-M0-50-R opens upon pressure drop command, sustains filters back flush pressure and establishes reduced pressure zone.

[2] BERMAD Relief Valve Model IR-43Q-R

[3] BERMAD N.C. Main Valve Model IR-405-54-R

BERMAD Irrigation



900 Series

Pressure Reducing


IR-923-M0-50-R

For full technical details, refer to Engineering Section.

Technical Specifications

Dimensions and Weights

Size	DN Inch	80 3	100 4	150 6	200 8	250 10
L	mm	300	350	500	600	600
	inch	11.8	13.8	19.7	23.6	23.6
H	mm	382	447	602	617	617
	inch	15	17.6	23.7	24.3	24.3
C	mm	290	340	450	465	465
	inch	11.4	13.4	17.7	18.3	18.3
R	mm	123	137	216	228	228
	inch	4.8	5.4	8.5	9	9
A; B	mm	305	325	390	390	415
	inch	12	12.8	15.4	15.4	16.3
Weight	Kg	23	31	71	93	141
	lb.	57.7	68.3	156.5	205	310.9



Accuracy & Flow Data (ISO 4064-I, Class B)

Size	Accuracy	DN inch	80 3	100 4	150 6	200 & 250 8 & 10
Q min (Minimum flow)	5%	m ³	1.2	1.8	4	6.3
		gpm	5.3	7.9	17.6	27.7
Qn, ISO 4064-1 (Nominal flow)	2%	m ³	40	60	150	250
		gpm	176	264	660	1100
Qper=Q3 (Permanent flow)	2%	m ³	100	160	250	400
		gpm	440	704	1100	1760

Pulse Option

Size	One pulse per	Liter ; Gallon		m ³ ; Gallon	
		1; 0.1	10; 1	100; 10	1; 100
3-4"; DN80-100	■			▲	▲
	■			▲	▲
6-10"; DN150-250	■			▲	▲
	■			▲	▲

▲ R.S. = Reed-Switch ■ O.E. = Opto-Electric
Two parallel pulses are transmitted. other pulse rates are available on request.

Technical Data

Patterns and Sizes:

Globe: 3-10"; DN80-250
Angle 90°: 3-8"; DN80-200
Angle 120°: 4"; DN100

End Connections:

Flanged: 3-10"; DN80-250

Pressure Ratings: 16 bar; 232 psi

Minimum Operating Pressure:

0.5 bar; 7 psi

For lower pressure requirements, consult factory

Setting Range:

Reducing: 1-10 bar; 15-145 psi

Sustaining: 1-16 bar; 15-232 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

Materials:

Body and Cover:

Polyester Coated Cast or Ductile Iron

Internals:

St. St. & Glass Fiber Reinforced Nylon

Impeller:

Polypropylene

Elastomers:

Reinforced NR & NBR

Pivots and Bearings:

Tungsten Carbide


Control Accessories:

Brass


Tubing and Fittings:

Reinforced Plastic and Brass

Flow Chart

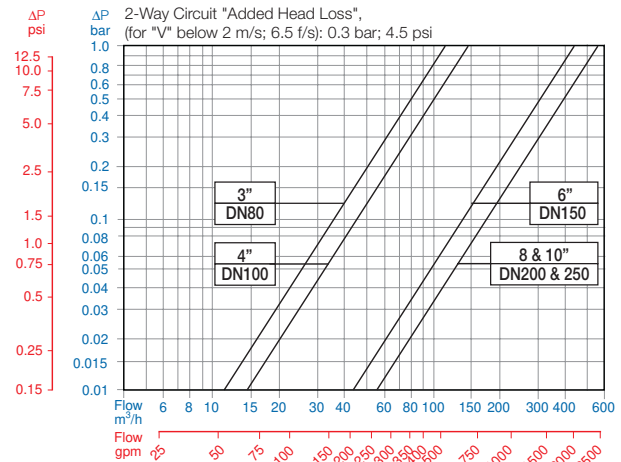

Operation

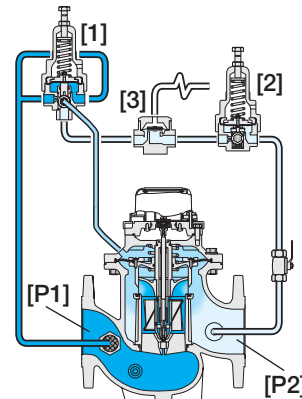

The Pressure Sustaining pilot [1] commands the Hydrometer to throttle closed should Upstream Pressure [P1] drop below pilot setting, and modulate open when [P1] rises above it. When [P1] is high, the Pressure Reducing Pilot [2] commands the Hydrometer to prevent Downstream Pressure [P2] from rising above pilot setting. The Hydraulic Relay Valve [3] closes upon pressure rise command, shutting the Hydrometer.

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	3-10"	923	M0	50	G"	I	16	PG	-	PB	WAT	R23	R
<p>Other sizes available on request.</p> <p>Globe: G Angle: A 120 (4"; DN100 only): H</p> <p>Plastic Tubing & Brass Fittings: PB Copper Tubing & Brass Fittings: CB</p> <p>R.S. 100 Lit: R02 R.S. 1 m³: R03 R.S. 10 m³: R04 R.S. 100 Lit + 1 m³: R23 R.S. 1 m³+10 m³: R34 O.E. 1 Lit: P01 O.E. 10 Lit: P10 O.E.+R.S. 1+100 Lit: PQ1 O.E.+R.S. 10 Lit+1 m³: P13 R.S. No Pulse: RNP</p> <p>R02: R.S. 10 Gal R03: R.S. 100 Gal R04: R.S. 1000 Gal R23: R.S. 10+100 Gal R34: R.S. 100+1000 Gal O.E. 0.1 Gal: PG2 O.E. 1 Gal: PG3 O.E.+R.S. 0.1+10 Gal: P4G O.E.+R.S. 1+100 Gal: P5G R.S. No Pulse Gal: RNG</p> <p>RG4: Metal Control Accessories RG5: Homologation Approved RG6: Other attributes available on request G45: Other attributes available on request G56: Other attributes available on request P4G: Other attributes available on request P5G: Other attributes available on request RNG: Other attributes available on request</p>													
	ISO-16	16											
	ISO-10	10											
	ISO-14 (ISO-10/4 Holes)	14											
	ANSI-125	A1											
	JIS-10	J1											
	BST-D	BD											

R.S. = Reed-Switch O.E. = Opto-Electric



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. P09AEM0-23-50R 05