

## Flow Control Pressure Reducing and Sustaining Hydrometer

IR-972-55-RUX

The BERMAD Model IR-972-M0-55-RUX integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. Combining a Flow Meter and Main Valve, allows efficient irrigation control with an irrigation controller. The BERMAD Hydrometer limits the flow and downstream pressure to a constant preset maximum. It either opens or shuts in response to an electric signal.



### Features and Benefits

- Integrated “All-in-One” control valve
  - Saves space, cost and maintenance
- Internal Inlet & Outlet Flow Straighteners
  - Saves on straightening distances
  - Maintains accuracy
- Integrated Flow Metering Calibration Device
- Simple in-Line Inspection and Service
- Line Pressure driven
  - Independent operation
  - Limits fill-up rate and consumer over-demand
  - Protects downstream system
- Hydraulic flow sensor (Orifice)
  - No moving parts
  - No electronic components
  - No need of flow straightening
- Advanced control loop design
  - Linear, accurate and stable modulation
  - Convertible platform for vast number of applications
- Easy on-site set point change
- Electrical Open / Close command
  - Adding main valve capabilities


### Typical Applications

- Downhill Pressurized Supply Lines
- Multiple Independent Consumer Systems
- Line Fill-Up Control Solution
- Pressure Reducing Systems
- Computerized Irrigation Systems
- Flow Monitoring and Leakage Control



- [1] BERMAD Model IR-972-55-RUX opens in response to an electric signal, prevents emptying of supply line, maintains system designed flow and establishes reduced pressure zone.
- [2] BERMAD Strainer Model 70-F
- [3] BERMAD Combination Air Valve Model C30
- [4] BERMAD Kinetic Air Valve Model A10

# BERMAD Irrigation




IR-972-55-RUX

**900 Series**

Flow Control & Pressure Reducing

## Dimensions and Weights

Size	DN Inch	40-F 1½-F	40-T 1½-T	50-T 2-T	50A-T 2A-T	50-F 2-F	65-F 2½-F	80R-T 3R-T	80R-F 4R-F	80-F 3-F	80A-F 3A-F	100-F 4-F	100A-F 4A-F	150-F 6-F	150A-F 6A-F	200-F 8-F	200A-F 8A-F	250-F 10-F
L	mm	250	250	250	N.A	250	300	250	310	300	N.A	350	N.A	500	N.A	600.0	N.A	600.0
	inch	9.8	9.8	9.8	N.A	9.8	11.8	9.8	12.2	11.8	N.A	13.8	N.A	19.7	N.A	23.6	N.A	23.6
La	mm	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	150	N.A	180	N.A	250	N.A	250	N.A
	inch	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	5.9	N.A	7.1	N.A	9.8	N.A	9.8	N.A
H	mm	28	270	277	300	280	298	277	298	382	402	447	481	602	585	617	585	617
	inch	11.3	10.6	10.9	11.8	11.3	11.7	10.9	11.7	15.0	15.8	17.6	18.9	23.7	23	24.3	23	24.3
C	mm	210	210	210	210	210	210	210	225	285	285	365	365	450	450	465	465	465
	inch	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.9	11.2	11.2	14.4	14.4	17.7	17.7	18.3	18.3	18.3
h	mm	95	95	95	125	95	95	79	100	123	196	137	225	216	306	228	280	228
	inch	3.7	3.7	3.7	4.9	3.7	3.7	3.1	3.9	4.8	7.7	5.4	8.9	8.5	12.0	9.0	11.0	9.0
A; B	mm	305	280	280	280	305	305	305	305	305	305	325	325	390	390	390	390	415
	inch	12.0	11.0	11.0	11.0	12.0	12.0	12.0	12.0	12.0	12.0	12.8	12.8	15.4	15.4	15.4	15.4	16.3
M*	mm	N.A	67	77	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A
	inch	N.A	2.6	3.0	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A	N.A
Weight	Kg	16	6.8	8.8	8.1	16	16	7.3	16.0	26.0	25.8	37.0	36.1	71.0	71.0	93.0	93.0	141.0
	lb.	35.3	15	19.4	17.4	35.3	35.3	16.1	35.3	57.3	56.2	81.6	78.9	156.5	156.5	205	205	310.9

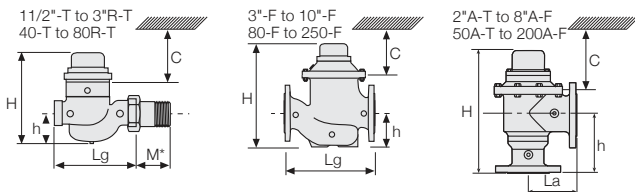

## Accuracy & Flow Data

Size	Accuracy	DN Inch	40 1½	50 2	65 2½	80R 3R	80 3	100 4	150 6	200 & 250 8 & 10
ISO 4064-1 Class			A	A	A	B	B	B	B	B
Q min (Minimum flow)	5%	m³ gpm	0.8 3.5	0.8 3.5	1.2 5.3	1.2 5.3	1.2 5.3	1.8 7.9	4.0 17.6	6.3 27.7
Qn, ISO 4064-1 (Nominal flow)	2%	m³ gpm	15 66	15 66	25 110	17 75	40 176	60 264	150 660	250 1100
Qper=Q3 (Permanent flow)	2%	m³ gpm	25 110	40 176	40 176	40 176	100 440	160 704	250 1100	400 1760

## Pulse Option

Size	One Pulse Per	Reed Switch - Single			Reed Switch - Combined	
		100 liter	1 m³	10 m³	100 liter + 1 m³	1 m³ + 10 m³
DN40-DN100; 1½-4"		◆	◆		◆	
DN150-DN250; 6-10"			◆	◆		◆

Two parallel pulses are transmitted. other pulse rates are available on request.

## Technical Data

### End Connections:


Threaded: 1½, 2", 3"; DN40, 50, 80R  
Flanged: 3R, - 10"; DN80R - 250

Pressure Rating: 10 bar; 145 psi  
16 bar; 232 psi

Minimum Operating Pressure: 0.5 bar; 7 psi  
For lower pressure requirements, consult factory  
Setting Range: 1-7.0 bar; 15-100 psi  
1-10 bar; 15-145 psi  
Flow Setting Range: 1-5 m/sec; 3.3-16.5 f/sec

Solenoid Voltage Range:  
S-390 & S-400: 24 VAC, 24 VDC  
S-392 & S-395: 6-20 VDC, Latch  
S-402 & S-405: 9-40 VDC, Latch  
S-982 & S-985: 12-50 VDC, Latch  
Other voltages available.

For Full electric data, refer to Accessories Section.

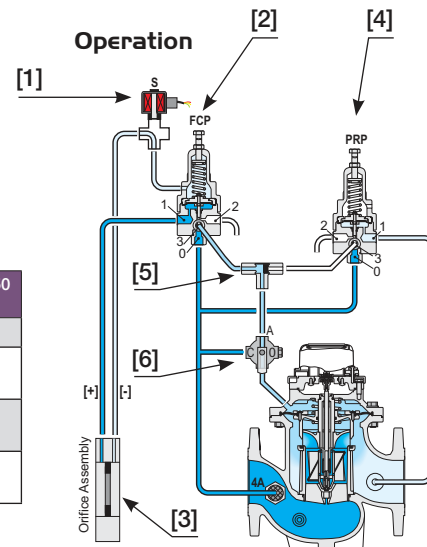

Energizing the Solenoid [1] opens the Hydrometer. The Flow Pilot [2] sensing the DP across the Orifice Assy. [3], commands the Hydrometer to throttle closed should demand rise above setting. The Pressure Reducing Pilot [4] controls the Hydrometer, preventing Downstream Pressure from rising above setting. The Shuttle Valve [5] directs the pilots commands into/out-off the Hydrometer Control chamber. De-energizing the solenoid causes the Hydrometer to shut. The Manual Selector [6] enables local manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved.  
© Copyright by BERMAD. PC9AEMO-72-55RUX March 2016