


Check Valve

Lift Type

Non-slam, lift type, non-return Check Valve that opens to allow flow in the required direction, and closes fast and drip tight to prevent any back flow.

Based on BERMAD 700 globe valves series in either standard oblique (Y) or angle (A) pattern design with full bore hydrodynamic body for unobstructed flow path. The valve's seat and check assemblies can be disassembled from the body as integral units without removing the valve from the line.

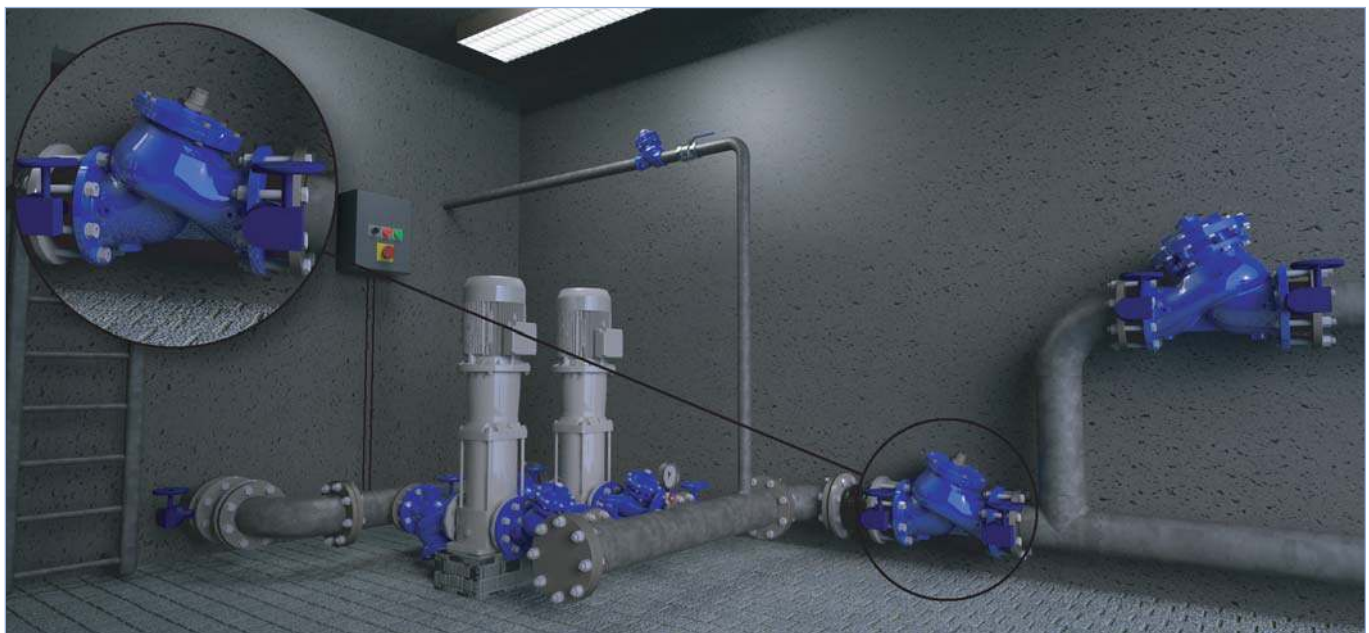


For illustration only

Typical Application

- Downstream of each high pressure pump where reverse flow prevention is required
- In pumping stations operating fix speed or variable speed pumps
- In water systems requiring one-way zone isolation
- In installations where flow indicators are required at the check valves, e.g. pumps no-flow protection or branch operation indicators
- In non regular installation sites with vertical or horizontal lines providing upward or downward flows

BERMAD Construction & Buildings

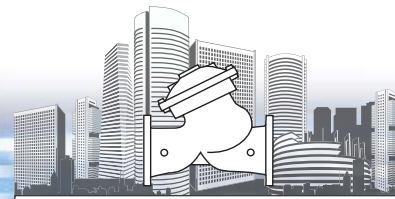

700 Series

Pump Applications


Model WW-70N-BP

Features and Benefits

- High quality construction materials ensure reliable, resilient and long lasting operation
- Durable design suitable for highly intensive operation
- Full bore valve port area and hydrodynamic body provide unobstructed flow path, with minimal pressure loss, operation noise and low cavitation damage
- Near maintenance-free straightforward balanced design including check and seat assemblies that can be easily disassembled from the valve body as separate integral units for minimal downtime
- Optional additional accessories available, including limit switches, position indicators, V / U ports, and more
- Convertible platform for vast number of applications
- Optional flow indication switch or opening position sensor for transmitting real time valve status to electrical control systems
- Spring loaded mechanism for fast closing – eliminates reverse flow, slam and water hammer, suitable for both vertical and horizontal installation

Technical Data

Table		Kv	A, B (mm)	C (mm)	L (mm)	H (mm)	W (mm)	Weight (kg)	
DN	inch							Flanged	Grooved
40	1½"	42	350	180	205	239	155	9.1	n/a
50	2"	50	350	180	210	244	165	10.6	6
65	2½"	55	350	180	222	257	178	13	8
80	3"	116	370	230	250	305	200	22	10
100	4"	200	395	275	320	366	223	37	16
150	6"	460	430	385	410	492	320	75	52
200	8"	815	475	460	599	584	390	125	95

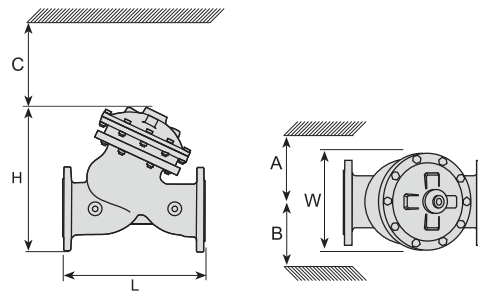

End Connections:

Flanged: ISO PN16, PN25 (ANSI Class 150, 300)

Threaded: ISO-7-Rp or NPT

Others: Available on request

Pressure Rating: 16, 25 bar (230, 362 psi)

Valve Pattern: Y & Angle

Working Temperature: Water up to 80°C (180°F)

Main Construction Materials:

Body, Cover and Actuator: Ductile Iron

Internals: Stainless Steel, Bronze & Coated Steel

Brass control components / accessories

Copper & Brass tubing & fittings

Optional: Stainless Steel 316

Elastomers: NBR Nylon fabric-reinforced

Coating / colour: Electrostatic Polyester Powder Blue

Optional: Epoxy Fusion-Bonded Blue

For other optional materials consult BERMAD

How to Order

Please specify the requested valve in the following sequence:

Size	Model	Category	End Connections
1½"	70N	BP	Flanged
2"			ISO-16 16
2½"			ISO-25 25
3"			ABNT16 B6
4"			ABNT25 B2
6"			ANSI150 A5
8"			ANSI300 A3
			JIS-16 J6
			Threaded
			BSP BP
			NPT NP
			Grooved
			ANSI C606 V1



For full technical specifications, see Engineering section or consult BERMAD

info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC7BE12-70N-BP