

Flow Control and Pressure Reducing Valve

with Hydraulic Control


IR-472-50-bRUZ

The BERMAD Flow Control and Pressure Reducing Valve with Hydraulic Control is a hydraulically operated, diaphragm actuated control valve that performs three independent functions. It controls system demand to a preset maximum flow rate; it reduces downstream pressure to a constant preset maximum, and it either opens or shuts in response to a remote pressure command.



Features and Benefits

- Hydraulic Flow & Pressure Control
 - Limits fill-up rate and consumer over-demand
 - Protects downstream systems
 - Hydraulically controlled On/Off
- Advanced Globe Hydro-Efficient Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
 - Excellent low flow regulation performance
 - Prevents diaphragm distortion
- Hydraulic Flow Sensor (upstream installation)
 - No Moving parts
 - No need for flow straightening
- User-Friendly Design
 - Easy flow and pressure setting
 - Simple in-line inspection and service

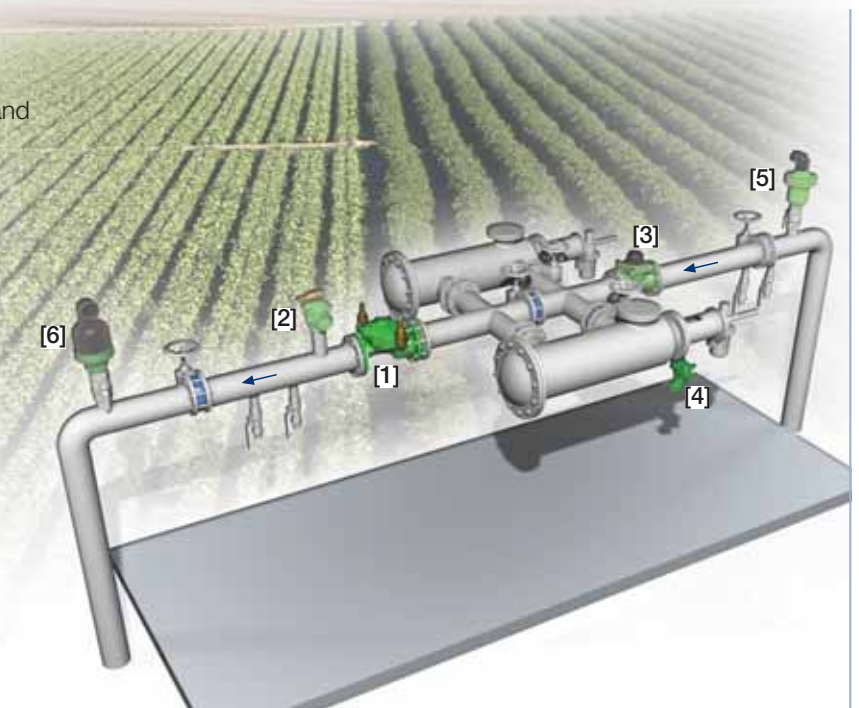


Typical Applications

- Computerized Irrigation Systems
- Line Fill-Up Control Solutions
- Multiple Independent Consumer Systems
- Pressure Reducing Stations
- Irrigation Machines
- Distribution Centers
- Filter Stations

- [1] BERMAD Model IR-472-50-bRUZ opens upon pressure drop command, limits fill-up rate and consumer over demand, and reduces system pressure.
- [2] BERMAD Relief Valve Model IR-43Q-R
- [3] BERMAD Water Meter Model WPH
- [4] BERMAD Filter Flush Valve Model IR-405-Z
- [5] BERMAD Air Valve Model ARC-A-I-I
- [6] BERMAD Air Valve Model ARC-A-P-I

BERMAD Irrigation



IR-472-50-bRUZ

For full technical details, refer to Engineering Section.


400 Series

Flow Control

Technical Specifications

Dimensions and Weights

Size	DN Inch	80 3	100 4	150 6	200 8	250 10	300 12	350 14	400 16
L	mm	250	320	415	500	605	725	742	742
	inch	9.8	12.6	16.3	19.8	23.8	28.5	29.2	29.2
H	mm	210	242	345	430	460	635	655	965
	inch	8.3	9.5	13.6	16.9	18.1	25	25.8	38
C	mm	125	145	207	258	276	381	393	579
	inch	5	5.7	8.2	10.2	10.9	15	15.5	22.8
R	mm	100	112	140	170	202	242	260	300
	inch	3.9	4.4	5.5	6.7	8	9.5	10.2	11.8
A; B	mm	300	312	353	383	403	490	494	500
	inch	11.8	12.3	13.9	15.1	15.9	19.3	19.4	19.7
Weight	Kg	19	28	68	125	140	290	358	377
	lb.	41.9	61.7	149.9	275.6	308.6	639.3	789.2	831.1

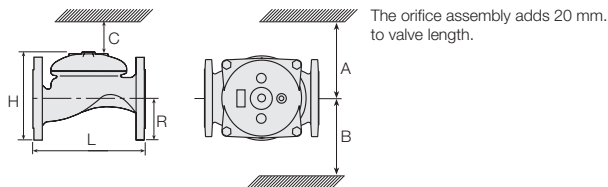

Technical Data

Patterns and Sizes: Globe: 3-16"; DN80-400 Angle: 3-4"; DN80-100

End Connections:

Size		3"	4"	6"	8-16"
		DN80	DN100	DN150	DN200-400
Threaded	Globe	■			
	Angle	■			
Flanged	Globe	■	■	■	■
	Angle	■	■		
Grooved	Globe	■	■	■	
	Angle	■	■		

Pressure Rating: 16 bar; 232 psi

Operating Pressure Range: 0.5-16 bar; 7-232 psi

For lower pressure requirements, consult factory

Setting Range: 1-10 bar; 15-145 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

Flow Setting Range: ±20% from valve predetermined flow

Orifice diameter is calculated in accordance with desired ΔP at predetermined flow:

Although the standard calculated ΔP is 0.4 bar; 5.5 psi,

the actual head loss is 0.2 bar; 2.8 psi

Materials:

Body and Cover:

Polyester Coated Cast or (10"; DN250 and larger) Ductile Iron

Spring: Stainless Steel

Diaphragm: Nylon fabric Reinforced NR with rugged insert

Bolts, Studs and Nuts: Zinc-Cobalt plated Steel

Control Accessories: Brass

Tubing and Fittings: Reinforced Plastic and Brass

How to Order


Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Additional Feature	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage -Main Valve Position	Tubing & Fittings	Additional Attributes
IR	3-16" <small>Other sizes available on request.</small>	472	50	-	G	I	16	PG	-	PB	bRUZ
	Globe Angle (up to 4"; DN100)	G A	ISO-16 ISO-10 IS 14 (ISO 10/4 Holes) ANSI-125 ANSI-150 JIS-10 BST-D Grooved (3-6"; DN80-150 only)		16 10 14 A1 A5 J1 BD VI	Plastic Tubing & Brass Fittings Copper Tubing & Brass Fittings		PB CB		Servo Metal Control Accessories Orifice Assembly Manual Selector Large Control Filter Valve Position Indicator ⁽¹⁾ Flow Stem ⁽¹⁾	b R U Z F I M
	Cast Iron (up to 8"; DN200) Ductile Iron (10"; DN250 & above)	I C									


Other end connections available on request

(1) Standard Irrigation Cover & Diaphragm are unfitted to Attributes I, M.
Other attributes available on request.

Flow Chart

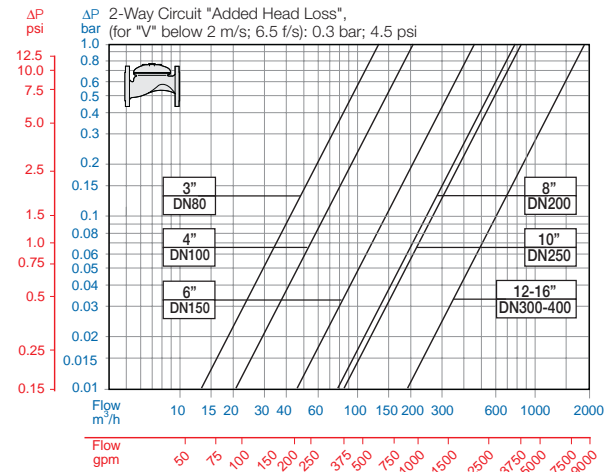

Operation

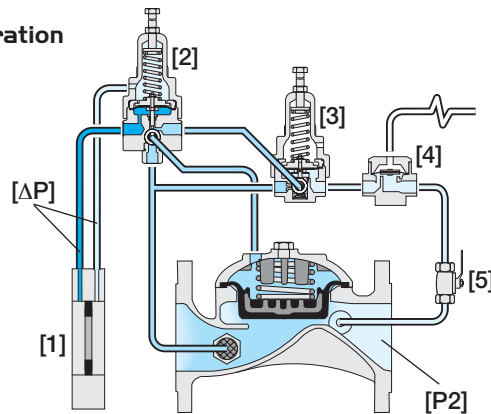

Pressure Differential [ΔP] across the Orifice Assembly [1] is in direct proportion to demand. The Flow Pilot [2] continuously senses [ΔP] and commands the Valve to throttle closed should demand rise above pilot setting, and to modulate open when demand drops. The Pressure Reducing Pilot [3] controls the Valve to prevent Downstream Pressure [P2] from rising above pilot setting. The Hydraulic Relay Valve [4] closes upon pressure rise command, shutting the main Valve. The downstream Cock Valve [5] enables manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC4AE72-50R 05