

## Pressure Reducing Hydrometer

Magnetic Drive with Solenoid Control


IR-920-M0-55-KX

The BERMAD Model IR-920-M0-55-KX integrates a vertical turbine Woltman-type water meter and a diaphragm actuated hydraulic control valve. Serving as Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD Hydrometer reduces higher upstream pressure to lower constant downstream pressure and opens fully upon line pressure drop. It either opens or shuts in response to an electric signal.



### Features and Benefits

- Integrated "All-in-One" Control Valve
  - Saves space, cost and maintenance
- Line Pressure Driven, Electrically Controlled On/Off
  - Protects downstream systems
  - Opens fully upon line pressure drop
- Magnetic Drive with Vacuum-Sealed Register
  - Water-free gear train mechanism
  - Reed-switch and Opto pulse-generating modes
  - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
  - Saves on straightening distances
  - Maintains accuracy
- Integrated Flow Metering Calibration Device
- Simple In-Line Inspection And Service

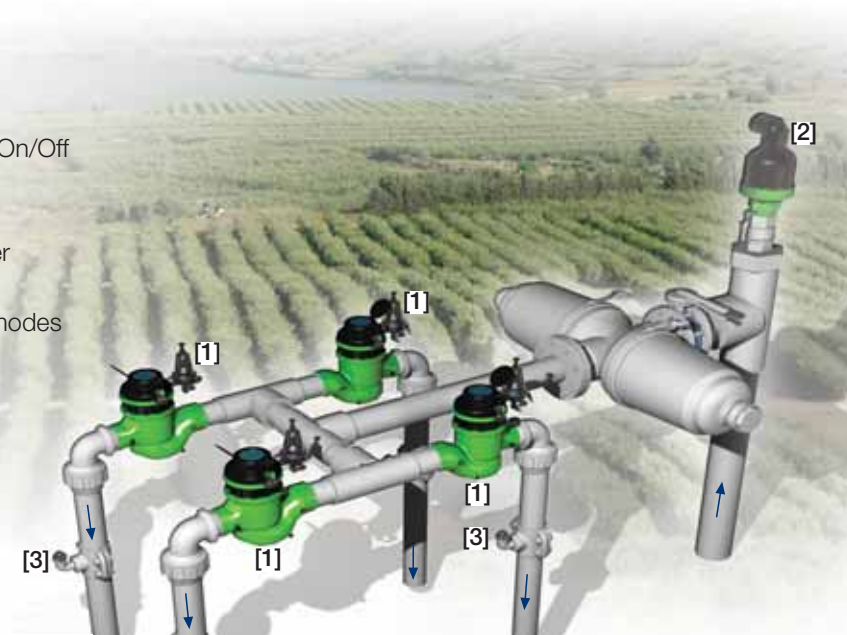

### Typical Applications


- Computerized Irrigation Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Remote and/or Elevated Plots
- Pressure Reducing Stations
- Systems Subject to Varying Supply Pressure
- Distribution Centers

[1] BERMAD Model IR-920-M0-55-KX opens in response to electric signals establishes reduced pressure zone, and controls irrigation shifts.

[2] BERMAD Air Valve Model ARC-A-P-I

[3] BERMAD Vacuum Breaker Model 1/2"-ARV

# BERMAD Irrigation



## IR-920-MO-55-KX

For full technical details, refer to Engineering Section.


## 900 Series

Pressure Reducing Standard

### Technical Specifications

#### Dimensions and Weights

| Size   | DN Inch | 40-T 1 1/2-T | 50-T 2-T | 50A-T 2A-T | 80R-T 3R-T | 80R-F 4R-F | 80-F 3-F | 80A-F 3A-F | 100-F 4-F | 100A-F 4A-F |
|--------|---------|--------------|----------|------------|------------|------------|----------|------------|-----------|-------------|
| Lg     | mm      | 250          | 250      | N.A.       | 250        | 310        | 300      | N.A.       | 350       | N.A.        |
|        | inch    | 9.8          | 9.8      | N.A.       | 9.8        | 12.2       | 11.8     | N.A.       | 13.8      | N.A.        |
| La     | mm      | N.A.         | N.A.     | 120        | N.A.       | N.A.       | N.A.     | 150        | N.A.      | 180         |
|        | inch    | N.A.         | N.A.     | 4.7        | N.A.       | N.A.       | N.A.     | 5.9        | N.A.      | 7.1         |
| H      | mm      | 270          | 277      | 300        | 277        | 298        | 382      | 402        | 447       | 481         |
|        | inch    | 10.6         | 10.9     | 11.8       | 10.9       | 11.7       | 15.0     | 15.8       | 17.6      | 18.9        |
| C      | mm      | 210          | 210      | 210        | 210        | 225        | 285      | 285        | 365       | 365         |
|        | inch    | 9            | 9        | 9          | 9          | 9          | 11       | 11         | 15        | 15          |
| h      | mm      | 95           | 95       | 125        | 79         | 100        | 123      | 196        | 137       | 225         |
|        | inch    | 3.7          | 3.7      | 4.9        | 3.1        | 3.9        | 4.8      | 7.7        | 5.4       | 8.9         |
| M*     | mm      | 67           | 77       | N.A.       | N.A.       | N.A.       | N.A.     | N.A.       | N.A.      | N.A.        |
|        | inch    | 2.6          | 3.0      | N.A.       | N.A.       | N.A.       | N.A.     | N.A.       | N.A.      | N.A.        |
| Weight | Kg      | 6.8          | 8.8      | 8.1        | 7.3        | 16         | 26.0     | 25.8       | 37.0      | 36.1        |
|        | lb.     | 15           | 19.4     | 17.4       | 16.1       | 35.3       | 57.3     | 56.2       | 81.6      | 78.9        |

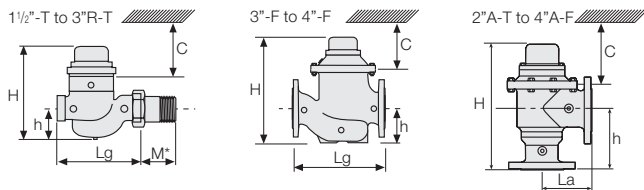

#### Accuracy & Flow Data

| Size                          | Accuracy | DN inch        | 40 1 1/2 | 50 2 | 80R 3R | 80 3 | 100 4 |
|-------------------------------|----------|----------------|----------|------|--------|------|-------|
| ISO 4064-1 Class              |          |                | A        | A    |        | B    | B     |
| Q min (Minimum flow)          | 5%       | m <sup>3</sup> | 0.8      | 0.8  | 1.2    | 1.2  | 1.8   |
|                               |          | gpm            | 3.5      | 3.5  | 5.3    | 5.3  | 7.9   |
| Qn, ISO 4064-1 (Nominal flow) | 2%       | m <sup>3</sup> | 15       | 15   | 17     | 40   | 60    |
|                               |          | gpm            | 66       | 66   | 75     | 176  | 264   |
| Qper=Q3 (Permanent flow)      | 2%       | m <sup>3</sup> | 25       | 40   | 40     | 100  | 160   |
|                               |          | gpm            | 110      | 176  | 176    | 440  | 704   |

#### Pulse Option

| Size     | One pulse per | Liter ; Gallon |       |         |           |
|----------|---------------|----------------|-------|---------|-----------|
|          |               | 1; 0.1         | 10; 1 | 100; 10 | 1000; 100 |
| 1 1/2-4" | DN50-100      | ▲              | ▲     | ▲       | ▲         |

▲ R.S. = Reed-Switch    ■ O.E. = Opto-Electric  
Two parallel pulses are transmitted. other pulse rates are available on request.

### Technical Data

#### End Connections:

Threaded: 1 1/2, 2 & 3"R; DN40, 50 & 80R

Flanged: 3R, 3 & 4"; DN80R, 80 & 100

Pressure Rating: 10 bar; 145 psi

Minimum Operating Pressure: 0.5 bar; 7 psi

For lower pressure requirements, consult factory

Setting Range: 1-7 bar; 15-100 psi

Setting ranges vary according to specific pilot spring.

Please consult factory.

#### Solenoid Voltage Range:

S-390 & S-400: 24 VAC, 24 VDC


S-392 & S-402: 9-20 VDC, Latch

S-982 & S-985: 12-50 VDC, Latch

Other voltages available

For full electric data, refer to Accessories Sections

### Operation

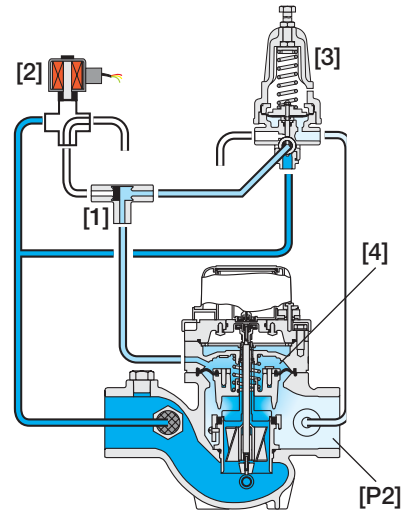

The Shuttle Valve [1] hydraulically connects the Solenoid [2] or the Pressure Reducing Pilot (PRP) [3] to the Hydrometer Control Chamber [4]. When the solenoid is closed, the PRP commands the Hydrometer to throttle closed should Downstream Pressure [P2] rise above setting, and to open fully when it drops below setting. In response to an electric signal, the solenoid switches, directing line pressure through the Shuttle Valve into the control chamber. This causes the Hydrometer to shut. The solenoid also features local manual closing.

### How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

| Sector   | Size     | Primary Feature | Control Categories | Additional Feature | Pattern | Construction Materials | End Connections | Coating | Voltage & Position | Tubing & Fittings | Dial Capacity | Pulse Rate | Additional Attributes |
|--|----------|-----------------|--------------------|--------------------|---------|------------------------|-----------------|---------|--------------------|-------------------|---------------|------------|-----------------------|
| IR   | 1 1/2-4" | 920             | MO                 | 55                 | G       | I                      | BP              | PG      | 4AC                | PP                | WAT           | R12        | KX                    |
| <p>Other sizes available on request.</p> <p>Globe    G    9VDC -    Latch    9DS    R.S.    10 Lit    R01    R.S.    1 Gal    RG3    Plastic Control Accessories    K</p> <p>Angle 90°    A    12VDC -    Latch    1DS    R.S.    100 Lit    R02    R.S.    10 Gal    RG4    3-Way Control    X</p> <p>120° (2 1/2" &amp; 4" only)    H    24VDC -    N.C.    4DC    R.S.    1 m<sup>3</sup>    R03    R.S.    100 Gal    RG5    Homologation Approved    L</p> <p>24VDC -    N.O.    4DC    R.S.    100 Lit+10 Lit    R12    R.S.    10+1 Gal    G34</p> <p>24VAC -    N.C.    4AC    R.S.    1 m3+1100 Lit    R23    R.S.    100+10 Gal    G45</p> <p>ISO-16    16    24VAC -    N.O.    4AO    O.E.    1 Lit    P01    O.E.    0.1 Gal    PG2</p> <p>ISO-10    10    24VAC, Lightning Proof - N.C.    4RC    O.E.    10 Lit    P10    O.E.    1 Gal    PG3</p> <p>ISO-14 (ISO-10/4 Holes)    14    24VAC, Lightning Proof - N.O.    4RO    O.E.+R.S.    1+100 Lit    PQ1    O.E.+R.S.    0.1+10 Gal    P4G</p> <p>ANSI-125    A1    Other electrical ratings are available.    O.E.+R.S.    10 Lit+1 m<sup>3</sup>    P13    O.E.+R.S.    1+100 Gal    P5G</p> <p>JIS-10    J1    Plastic Tubing &amp; Fittings    PP    R.S.    No Pulse    RNP    R.S.    No Pulse Gal    RNG</p> <p>BST-D    BD    Plastic Tubing &amp; Brass Fittings    PB</p> <p>R.S. = Reed-Switch    O.E. = Opto-Electric</p> |          |                 |                    |                    |         |                        |                 |         |                    |                   |               |            |                       |



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC9AEM0-20-55KX 05