

Pressure Reducing and Sustaining Hydrometer

**Magnetic Drive
with Solenoid Control**


IR-923-M0-55-KX



The BERMAD Model IR-923-M0-55-KX integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. Serving as Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD Hydrometer sustains minimum preset upstream (back) pressure and reduces downstream pressure to a constant preset maximum. It either opens or shuts in response to an electric signal.

Features and Benefits

- Integrated "All-in-One" Control Valve
 - Saves space, cost and maintenance
- Line Pressure Driven, Electrically Controlled On/Off
 - Prioritizes pressure zones
 - Controls system fill-up
 - Protects downstream system
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch and Opto pulse-generating modes
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
- Simple In-Line Inspection and Service

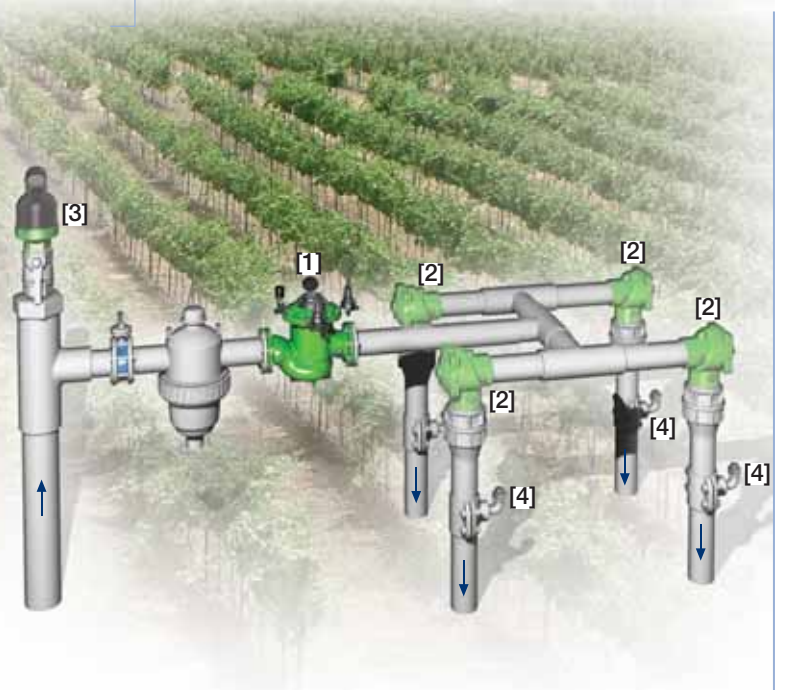


Typical Applications

- Computerized Irrigation Systems
- Flow Monitoring & Leakage Control
- Remote and/or Elevated Plots
- Line Fill-Up Control Solutions
- Systems Subject To Varying Supply Pressure
- Infield Filter Backwash Pressure Sustaining

- [1] BERMAD Model IR-923-M0-55-KX opens in response to electric signal, sustains supply pressure, protects downstream systems, and measures flow.
- [2] BERMAD On/Off Control Valve Model IR-405-Z
- [3] BERMAD Air Valve Model ARC-A-P-I
- [4] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-923-MO-55-KX

For full technical details, refer to Engineering Section.


900 Series

Pressure Reducing & Sustaining

Technical Specifications

Dimensions and Weights

Size	DN Inch	40-T 1 1/2-T	50-T 2-T	50A-T 2A-T	80R-T 3R-T	80R-F 4R-F	80-F 3-F	80A-F 3A-F	100-F 4-F	100A-F 4A-F
Lg	mm inch	250 9.8	250 9.8	N.A.	250 9.8	310 12.2	300 11.8	N.A.	350 13.8	N.A.
La	mm inch	N.A.	N.A.	120 4.7	N.A.	N.A.	N.A.	150 5.9	N.A.	180 7.1
H	mm inch	270 10.6	277 10.9	300 11.8	277 10.9	298 11.7	382 15.0	402 15.8	447 17.6	481 18.9
C	mm inch	210 8.3	210 8.3	210 8.3	210 8.3	225 8.9	285 11.2	285 11.2	365 14.4	365 14.4
h	mm inch	95 3.7	95 3.7	125 4.9	79 3.1	100 3.9	123 4.8	196 7.7	137 5.4	225 8.9
M*	mm inch	67 2.6	77 3.0	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Weight	Kg lb.	6.8 15	8.8 19.4	8.1 17.4	7.3 16.1	16 35.3	26.0 57.3	25.8 56.2	37.0 81.6	36.1 78.9

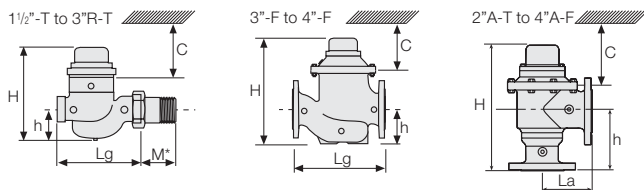

Accuracy & Flow Data

Size	Accuracy	DN inch	40 1 1/2	50 2	80R 3R	80 3	100 4
ISO 4064-1 Class			A	A		B	B
Q min (Minimum flow)	5%	m ³ gpm	0.8 3.5	0.8 3.5	1.2 5.3	1.2 5.3	1.8 7.9
Qn, ISO 4064-1 (Nominal flow)	2%	m ³ gpm	15 66	15 66	17 75	40 176	60 264
Qper=Q3 (Permanent flow)	2%	m ³ gpm	25 110	40 176	40 176	100 440	160 704

Pulse Option

Size	One pulse per	Liter ; Gallon			
		1; 0.1	10; 1	100; 10	1000; 100
1 1/2-4"; DN50-100		▲	▲	▲	▲

▲ R.S. = Reed-Switch ■ O.E. = Opto-Electric
Two parallel pulses are transmitted. other pulse rates are available on request.

Technical Data

End Connections:

Threaded: 1 1/2, 2 & 3"R; DN40, 50 & 80R
Flanged: 3R, 3 & 4"; DN80R, 80 & 100

Pressure Rating: 10 bar; 145 psi

Minimum Operating Pressure:

0.5 bar; 7 psi

For lower pressure requirements, consult factory

Setting Range: 1-7 bar; 15-100 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

Solenoid Voltage Range:

S-390 & S-400: 24 VAC, 24 VDC

S-392 & S-402: 9-20 VDC, Latch

S-982 & S-985: 12-50 VDC, Latch

Other voltages available.


For full electric data, refer to Accessories Section.

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	1 1/2-4"	923	MO	55	G	I	BP	PG	4AC	PP	WAT	R12	KX
Other sizes available on request.													
Globe	G	9VDC -	Latch	9DS	R.S.	10 Lit	R01	R.S.	1 Gal	RG3	Plastic Control Accessories	K	
Angle 90°	A	12VDC -	Latch	1DS	R.S.	100 Lit	R02	R.S.	10 Gal	RG4	3 Way Control	X	
120° (2 1/2" & 4" only)	H	24VDC -	N.C.	4DC	R.S.	1 m ³	R03	R.S.	100 Gal	RG5	omologation Approved	L	
		24VDC -	N.O.	4DC	R.S.	100 Lit+10 Lit	R12	R.S.	10+1 Gal	G34	Other attributes available on request		
BSP (1 1/2, 2 & 3"R only)	BP	24VAC -	N.C.	4AC	R.S.	1 m3+1100 Lit	R23	R.S.	100+10 Gal	G45			
NPT (1 1/2, 2 & 3"R only)	NP	24VAC -	N.O.	4AO	O.E.	1 Lit	P01	O.E.	0.1 Gal	PG2			
ISO-16	16	24VAC, Lightning Proof - N.C.		4RC	O.E.	10 Lit	P10	O.E.	1 Gal	PG3			
ISO-10	10	24VAC, Lightning Proof - N.O.		4RO	O.E.+R.S.	1+100 Lit	PQ1	O.E.+R.S.	0.1+10 Gal	P4G			
ISO-14 (ISO-10/4 Holes)	14	Other electrical ratings are available			O.E.+R.S.	10 Lit+1 m ³	P13	O.E.+R.S.	1+100 Gal	P5G			
ANSI-125	A1				R.S.	No Pulse	RNP	R.S.	No Pulse Gal	RNG			
JIS-10	J1	Plastic Tubing & Fittings			PP								
BST-D	BD	Plastic Tubing & Brass Fittings			PB								

Operation

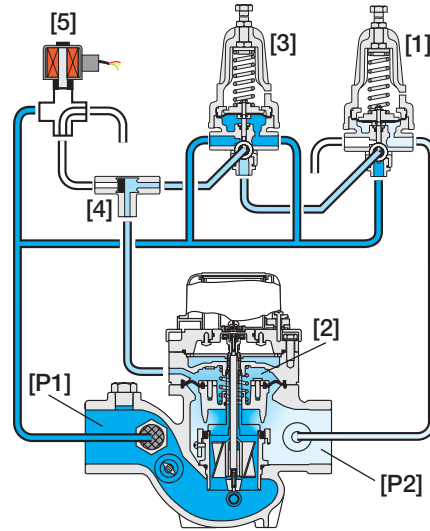

The Pressure Reducing Pilot (PRP) [1] is hydraulically connected to the Hydrometer Control Chamber [2] through the Pressure Sustaining Pilot (PSP) [3] and the Shuttle Valve [4]. The PSP commands the Hydrometer to throttle closed should Upstream Pressure [P1] drop below setting. When [P1] rises above setting, the PSP switches and allows the PRP to control the Hydrometer, commanding it to reduce Downstream Pressure [P2]. In response to an electric signal, the Solenoid [5] switches and pressurizes the shuttle valve, which then blocks the pilots and transmits the line pressure into the control chamber, shutting the Hydrometer.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC9AEM0-23-55KX 05