

Pressure Sustaining Hydrometer

**Magnetic Drive
with Solenoid Control**


IR-930-M0-55-KX

The BERMAD Model IR-930-M0-55-KX integrates a vertical turbine Woltman-type water meter and a diaphragm actuated hydraulic control valve. Serving as Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD Hydrometer sustains minimum preset upstream (back) pressure and opens fully when line pressure is in excess of setting. It either opens or shuts in response to an electric signal.



Features and Benefits

- Integrated "All-in-One" Control Valve
 - Saves space, cost and maintenance
- Line Pressure Driven, Electrically Controlled On/Off
 - Prioritizes pressure zones
 - Controls system fill-up
 - Opens fully upon line pressure rise
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch and Opto pulse-generating modes
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service

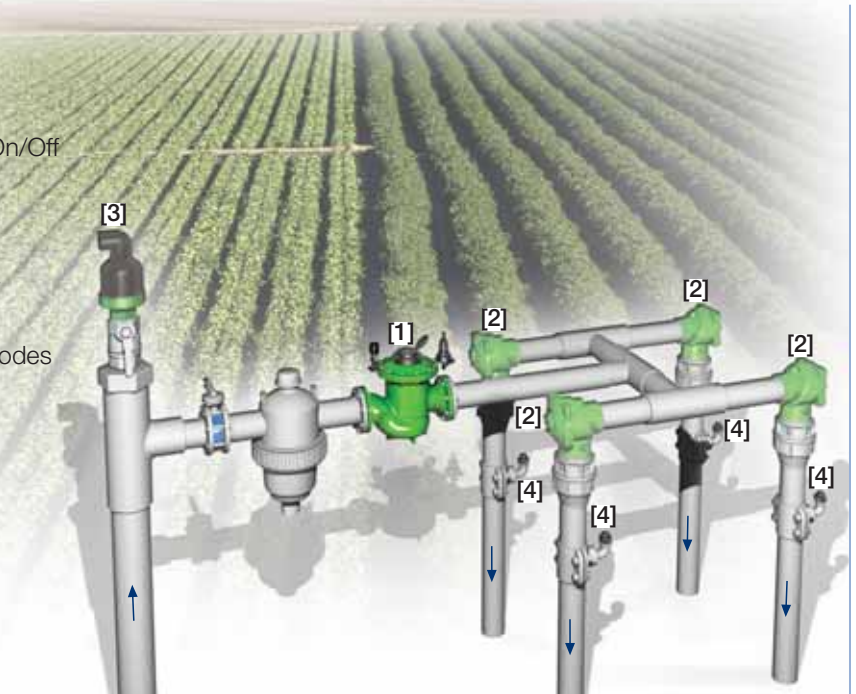

Typical Applications

- Computerized Irrigation Systems
- Flow Monitoring & Leakage Control
- Remote and/or Elevated Plots
- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Systems Subject to Varying Supply Pressure
- Infield Filters Backwash Pressure Sustaining


[1] BERMAD Model IR-930-M0-55-KX opens in response to electric signals, sustains pressure to protect supply system and measures flow.

[2] BERMAD On/Off Control Valve Model IR-405-Z

[3] BERMAD Air Valve Model ARC-A-P-I

[4] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-930-MO-55-KX

For full technical details, refer to Engineering Section.


900 Series

Pressure Sustaining

Technical Specifications

Dimensions and Weights

Size	DN Inch	40-T 1 1/2-T	50-T 2-T	50A-T 2A-T	80R-T 3R-T	80R-F 4R-F	80-F 3-F	80A-F 3A-F	100-F 4-F	100A-F 4A-F
Lg	mm	250	250	N.A.	250	310	300	N.A.	350	N.A.
	inch	9.8	9.8	N.A.	9.8	12.2	11.8	N.A.	13.8	N.A.
La	mm	N.A.	N.A.	120	N.A.	N.A.	N.A.	150	N.A.	180
	inch	N.A.	N.A.	4.7	N.A.	N.A.	N.A.	5.9	N.A.	7.1
H	mm	270	277	300	277	298	382	402	447	481
	inch	10.6	10.9	11.8	10.9	11.7	15.0	15.8	17.6	18.9
C	mm	210	210	210	210	225	285	285	365	365
	inch	9	9	9	9	9	11	11	15	15
h	mm	95	95	125	79	100	123	196	137	225
	inch	3.7	3.7	4.9	3.1	3.9	4.8	7.7	5.4	8.9
M*	mm	67	77	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
	inch	2.6	3.0	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Weight	Kg	6.8	8.8	8.1	7.3	16	26.0	25.8	37.0	36.1
	lb.	15	19.4	17.4	16.1	35.3	57.3	56.2	81.6	78.9

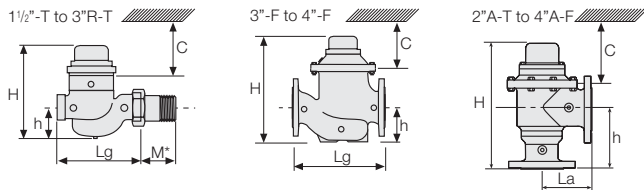

Accuracy & Flow Data

Size	Accuracy	DN inch	40 1 1/2	50 2	80R 3R	80 3	100 4
ISO 4064-1 Class			A	A		B	B
Q min (Minimum flow)	5%	m ³	0.8	0.8	1.2	1.2	1.8
		gpm	3.5	3.5	5.3	5.3	7.9
Qn, ISO 4064-1 (Nominal flow)	2%	m ³	15	15	17	40	60
		gpm	66	66	75	176	264
Qper=Q3 (Permanent flow)	2%	m ³	25	40	40	100	160
		gpm	110	176	176	440	704

Pulse Option

Size	One pulse per	Liter ; Gallon			
		1; 0.1	10; 1	100; 10	1000; 100
1 1/2-4"; DN50-100	■	■	▲	▲	▲
	■	■	▲	▲	▲

▲ R.S. = Reed-Switch ■ O.E. = Opto-Electric
Two parallel pulses are transmitted. other pulse rates are available on request.

Technical Data

End Connections:

Threaded: 1 1/2, 2 & 3"R; DN40, 50 & 80R
Flanged: 3R, 3 & 4"; DN80R, 80 & 100

Pressure Rating: 10 bar; 145 psi

Minimum Operating Pressure:

0.5 bar; 7 psi
For lower pressure requirements, consult factory
Setting Range: 1-7 bar; 15-100 psi
Setting ranges vary according to specific pilot spring.
Please consult factory.

Solenoid Voltage Range:


S-390 & S-400: 24 VAC, 24 VDC
S-392 & S-402: 9-20 VDC, Latch
S-982 & S-985: 12-50 VDC, Latch
Other voltages available.
For full electric data, refer to Accessories Section.

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	1 1/2-4"	930	MO	55	G	I	BP	PG	4AC	PP	WAT	R12	KX
Globe	G	9VDC - Latch	9DS	R.S.	10 Lit	R01	R.S.	1 Gal	RG3	Plastic Control Accessories K 3-Way Control X Homologation Approved L Other attributes available on request			
Angle 90°	A	12VDC - Latch	1DS	R.S.	100 Lit	R02	R.S.	10 Gal	RG4				
120° (2 1/2" & 4" only)	H	24VDC - N.C.	4DC	R.S.	1 m ³	R03	R.S.	100 Gal	RG5				
BSP (1 1/2, 2 & 3"R only)	BP	24VDC - N.O.	4DC	R.S.	100 Lit+10 Lit	R12	R.S.	10+1 Gal	G34				
NPT (1 1/2, 2 & 3"R only)	NP	24VAC - N.C.	4AC	R.S.	1 m3+1100 Lit	R23	R.S.	100+10 Gal	G45				
ISO-16	16	24VAC - N.O.	4AO	O.E.	1 Lit	P01	O.E.	0.1 Gal	PG2				
ISO-10	10	24VAC, Lightning Proof - N.C.	4RC	O.E.	10 Lit	P10	O.E.	1 Gal	PG3				
ISO-14 (ISO-10/4 Holes)	14	24VAC, Lightning Proof - N.O.	4RO	O.E.+R.S.	1+100 Lit	PQ1	O.E.+R.S.	0.1+10 Gal	P4G				
ANSI-125	A1	Other electrical ratings are available.		O.E.+R.S.	10 Lit+1 m ³	P13	O.E.+R.S.	1+100 Gal	P5G				
JIS-10	J1	Plastic Tubing & Fittings	PP	R.S.	No Pulse	RNP	R.S.	No Pulse Gal	RNG				
BST-D	BD	Plastic Tubing & Brass Fittings	PB										

Operation

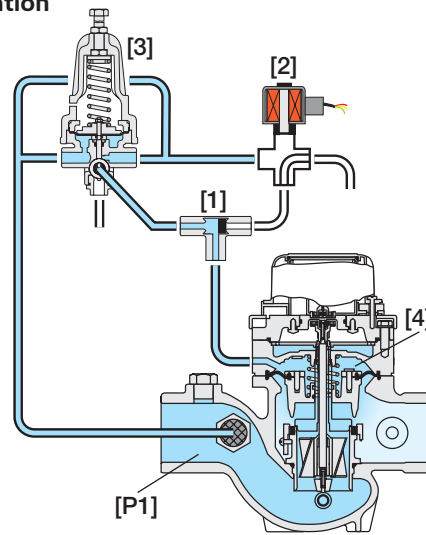

The Shuttle Valve [1] hydraulically connects the Solenoid [2] or the Pressure Sustaining Pilot (PSP) [3] to the Hydrometer Control Chamber [4]. When the solenoid is closed, the PSP commands the Hydrometer to throttle closed should Upstream Pressure [P1] drop below setting, and to open fully when [P1] rises above setting. In response to an electric signal, the solenoid switches, directing line pressure through the shuttle valve into the control chamber. This causes the Hydrometer to shut.

The solenoid also features local manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC9AEM0-30-55KX 05