

Pressure Reducing Valve

For Drip-Tape Applications


IR-420-bKZ

The BERMAD Pressure Reducing Valve is a hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to very low and stable preset downstream pressure regardless of fluctuating demand, or varying upstream pressure.



Features and Benefits

- Line Pressure Driven Pressure Reducing Valve
 - Protects downstream pressure
- Pressure Reducing Servo Pilot Controlled
 - Dynamic integrated needle valve
 - Settable to 0.5 bar; 7 psi
 - Very low hysteresis
- Advanced Globe Hydro-Efficient Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
 - Excellent low flow regulation performance
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service

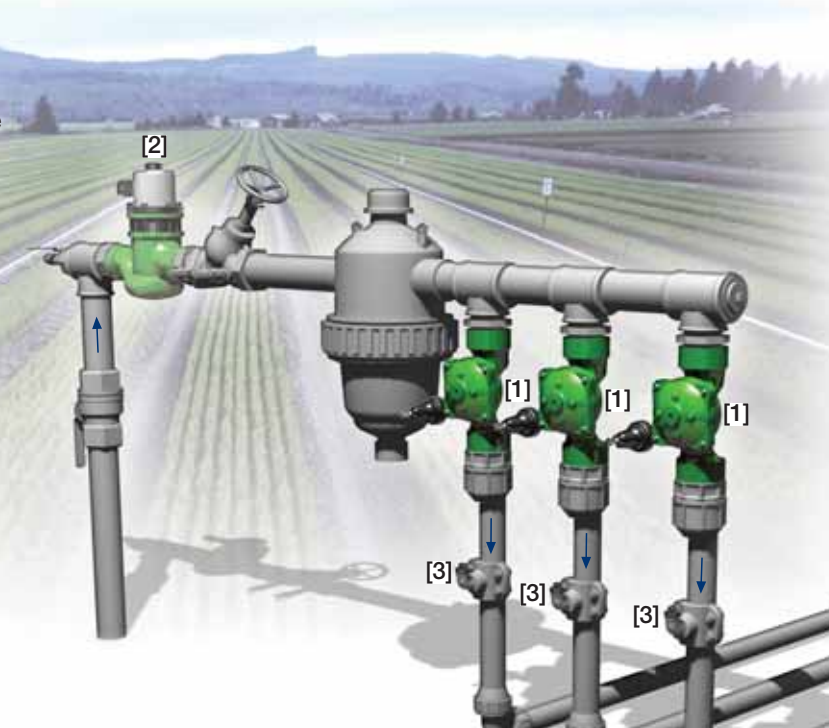

Typical Applications


- Drip-Tape Systems
- Low Set Pressure Applications
- Pressure Reducing Stations
- Low Supplied Pressure Irrigation Systems

[1] BERMAD Model IR-420-bKZ establishes reduced pressure zone protecting laterals and distribution line.

[2] BERMAD Automatic Metering Valve Model IR-900-D0

[3] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-420-bKZ

For full technical details, refer to Engineering Section.


400 Series

Pressure Reducing
Drip-Tape

Technical Specifications

Dimensions and Weights

Pattern	Globe						Angle					
	Connections	Threaded					Fl.	Threaded				Fl.
Size	DN	40	50	65	80R	80	100	50	65	80R	80	100
	Inch	1½"	2"	2½"	3"	3"	4"	2"	2½"	3"	3"	4"
Lg	mm inch	153 6	180 7.1	210 8.3	210 8.3	255 10.0	320 12.6	N.A.	N.A.	N.A.	N.A.	N.A.
La	mm inch	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	86 3.4	110 4.3	110 4.3	110 4.3	160 6.3
H	mm inch	87 3.4	114 4.5	132 5.2	140 5.5	165 6.5	242 9.5	136 5.4	180 7.1	178 7	184 7.2	223 8.8
C	mm inch	52 2	68 2.7	80 3.1	84 3.3	100 3.9	145 5.7	82 3.2	108 4.2	107 4.2	110 4.3	134 5.3
h	mm inch	29 1.1	39 1.5	45 1.8	53 2.1	55 2.2	112 4.4	61 2.4	93 3.7	91 3.6	80 3.1	112 4.4
A; B	mm inch	130 5	130 5	130 5	140 6	175 7	312 12.3	130 5.1	130 5.1	140 5.5	175 6.9	312 12.3
Weight	Kg lb.	2 4.4	4 8.8	5.7 12.6	5.8 12.8	13 28.7	28 61.7	4.4 9.7	5.8 12.8	7 15.4	11 24.3	26 57.3

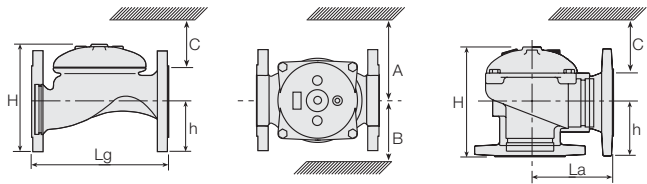

Technical Data

End connections:

Size		1½"	2"	2½"	3"	3"	4"
		DN40	DN50	DN65	DN80R	DN80	DN100
Threaded	Globe	■	■	■	■	■	■
	Angle	■	■	■	■	■	■
Flanged	Globe	■	■	■	■	■	■
	Angle	■	■	■	■	■	■
Grooved	Globe	■	■	■	■	■	■
	Angle	■	■	■	■	■	■

Pressure Rating: 10 bar; 145 psi

Operating Pressure Range: 0.5-10 bar; 7-145 psi

For lower pressure requirements, consult factory

Setting Range: 0.5-1.7 bar; 7-25 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

How to Order


Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Additional Feature	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage -Main Valve Position	Tubing & Fittings	Additional Attributes
IR	1½"-4" <small>Other sizes available on request.</small>	420	00	-	G	I	BP	PG	-	PP	bKZ
Globe		G	BSP		BP	Plastic Tubing & Fittings		PP	Servo		b
Angle		A	NPT		NP	Plastic Tubing & Brass Fittings		PB	Plastic Control Accessories		K
			ISO-16		16				Manual Selector		Z
			ISO-10		10				Valve Position Indicator ⁽¹⁾		I
			IS 14 (ISO 10/4 Holes)		14				Flow Stem ⁽¹⁾		M
			ANSI-125		A1						
			JIS-10		J1						
			BST-D		BD						
			Grooved		VI						


For available end connections/sizes, see End Connections Table above.

(1) Standard Irrigation Cover & Diaphragm are unfitted to Attributes I, M. Other additional attributes are optional. Please consult full-stop

Flow Chart

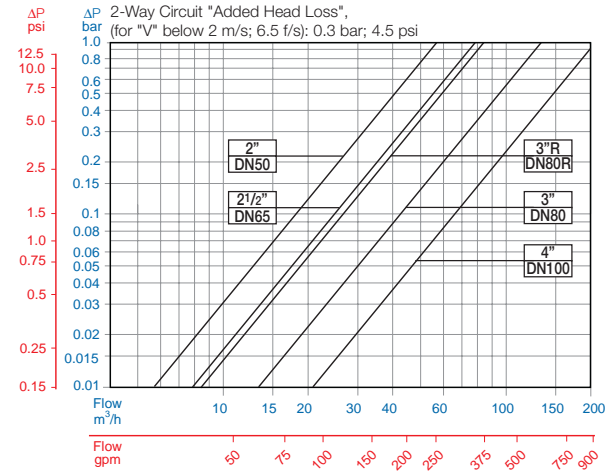

Operation

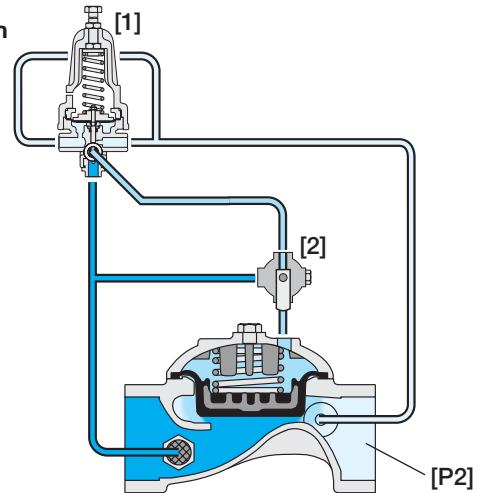

The Pressure Reducing Servo Pilot [1] commands the main Valve to throttle closed preventing downstream pressure [P2] from rising above pilot setting, and to modulate open when [P2] drops below pilot setting. The Manual selector [2] enables local manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC4AE20-KbZ 05