

## Pressure Reducing and Sustaining Valve

### IR-423-XZ

The BERMAD Model IR-423-XZ Pressure Reducing and Sustaining Valve is a hydraulically operated, diaphragm actuated control valve with two independent functions. It sustains minimum preset upstream pressure regardless of fluctuating flow or varying downstream pressure, and it prevents downstream pressure from rising above maximum preset regardless of fluctuating flow or excessive upstream pressure.



### Features and Benefits

- Line Pressure Driven PRV and PSV
  - Prioritizes higher pressure zones
  - Protects lower pressure zones
  - Controls system fill-up
  - Prevents pipeline emptying
  - Protects pump from overload and cavitation
  - Compensates during groundwater drawdown
- Advanced Globe Hydro-Efficient Design
  - Unobstructed flow path
  - Single moving part
  - High flow capacity
- Fully Supported & Balanced Diaphragm
  - Requires low actuation pressure
  - Excellent low flow regulation performance
  - Progressively restrains valve closing
  - Prevents diaphragm distortion
- Simple in-line inspection and service

### Typical Applications

- Downhill Supply Lines
  - Emptying Prevention
  - Higher Pressure Zone Prioritizing
  - Lower Pressure Zone Protection
- Line Fill-Up Control
- Systems Subject to Varying Supply Pressure
- Energy Saving Irrigation Systems
- Pump Overload and Cavitation Protection
- Deep Well Pump Drawdown Compensation




1] BERMAD Model IR-423-XZ prioritizes higher pressure zone, protects lower pressure zone, controls system fill-up, and prevents line emptying.

2] BERMAD Relief Valve Model 73Q

3] BERMAD Strainer Model 70F

# BERMAD Irrigation



## IR-423-XZ

For full technical details, refer to Engineering Section.


## 400 Series

Pressure Reducing


### Technical Specifications

#### Dimensions and Weights

| Size   | DN<br>Inch | 80<br>3 | 100<br>4 | 150<br>6 | 200<br>8 | 250<br>10 | 300<br>12 | 350<br>14 | 400<br>16 |
|--------|------------|---------|----------|----------|----------|-----------|-----------|-----------|-----------|
| L      | mm         | 250     | 320      | 415      | 500      | 605       | 725       | 742       | 742       |
|        | inch       | 9.8     | 12.6     | 16.3     | 19.8     | 23.8      | 28.5      | 29.2      | 29.2      |
| H      | mm         | 210     | 242      | 345      | 430      | 460       | 635       | 655       | 965       |
|        | inch       | 8.3     | 9.5      | 13.6     | 16.9     | 18.1      | 25        | 25.8      | 38        |
| C      | mm         | 125     | 145      | 207      | 258      | 276       | 381       | 393       | 579       |
|        | inch       | 5       | 5.7      | 8.2      | 10.2     | 10.9      | 15        | 15.5      | 22.8      |
| R      | mm         | 100     | 112      | 140      | 170      | 202       | 242       | 260       | 300       |
|        | inch       | 3.9     | 4.4      | 5.5      | 6.7      | 8         | 9.5       | 10.2      | 11.8      |
| A; B   | mm         | 300     | 312      | 353      | 383      | 403       | 490       | 494       | 500       |
|        | inch       | 11.8    | 12.3     | 13.9     | 15.1     | 15.9      | 19.3      | 19.4      | 19.7      |
| Weight | Kg         | 19      | 28       | 68       | 125      | 140       | 290       | 358       | 377       |
|        | lb.        | 41.9    | 61.7     | 149.9    | 275.6    | 308.6     | 639.3     | 789.2     | 831.1     |

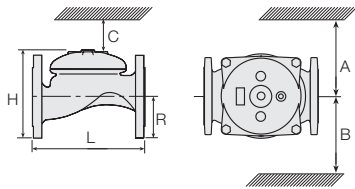

#### Flow Chart

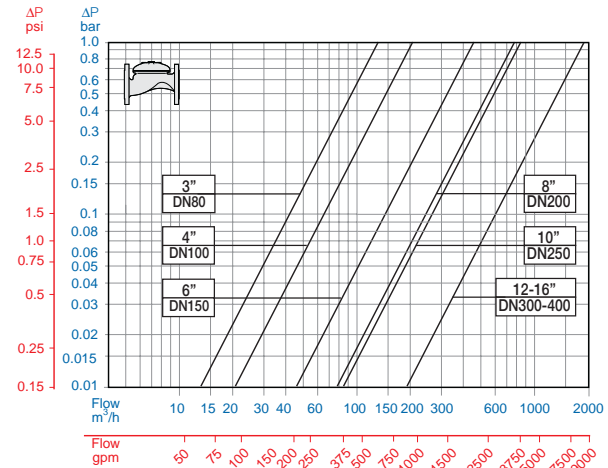

### Technical Data

Patterns and Sizes: Globe: 3-16"; DN80-400 Angle: 3-4"; DN80-100

End Connections:

| Size     |       | 3"   | 4"    | 6"    | 8-16"     |
|----------|-------|------|-------|-------|-----------|
|          |       | DN80 | DN100 | DN150 | DN200-400 |
| Threaded | Globe | ■    |       |       |           |
|          | Angle | ■    |       |       |           |
| Flanged  | Globe | ■    | ■     | ■     | ■         |
|          | Angle | ■    | ■     |       |           |
| Grooved  | Globe | ■    | ■     | ■     |           |
|          | Angle | ■    | ■     |       |           |

Pressure Ratings: 16 bar; 232 psi

Operating Pressure Range: 0.5-16 bar; 7-232 psi

For lower pressure requirements, consult factory.

Setting Range: 1.5-16 bar; 22-232 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

#### Materials:

Body and Cover:

Polyester Coated Cast or (10"; DN250 and larger) Ductile Iron

Spring: Stainless Steel


Diaphragm: Nylon fabric Reinforced NR with rugged insert

Bolts, Studs and Nuts: Zinc-Cobalt plated Steel

Control Accessories: Brass

Tubing and Fittings: Reinforced Plastic and Brass

### Operation

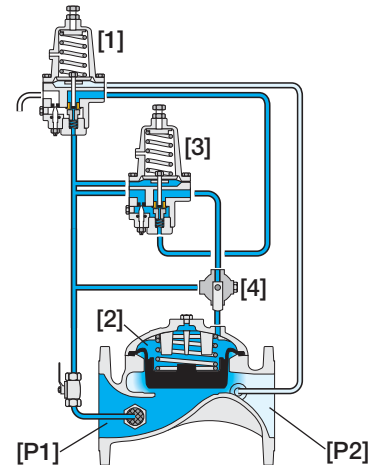

The Pressure Reducing Pilot (PRP) [1] is hydraulically connected to the Valve Control Chamber [2] through the Pressure Sustaining Pilot (PSP) [3]. The PSP commands the Valve to throttle closed should Upstream Pressure [P1] drop below setting. When [P1] rises above setting, the PSP switches and allows the PRP to control the Valve, commanding it to reduce Downstream Pressure [P2]. Should line pressure remain above PSP setting but below PRP setting - the Valve opens fully. The Manual Selector [4] enables local manual closing.

### How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

| Sector | Size  | Primary Feature | Additional Feature   | Additional Feature                           | Pattern   | Construction Materials | End Connections  | Coating               | Voltage -Main Valve Position   | Tubing & Fittings | Additional Attributes |
|--------|---|-----------------|--|--|---|------------------------|--|-----------------------|--|-------------------|-----------------------|
| IR     | 3-16"<br><small>Other sizes available on request.</small> | 423             | 00   | -  | G   | I                      | 16   | PG                    | -  | PB                | XZ                    |
|        | Globe<br>Angle (up to 4"; DN100)                          | G<br>A          | ISO-16<br>ISO-10<br>IS 14 (ISO 10/4 Holes)<br>ANSI-125<br>ANSI-150<br>JIS-10<br>BST-D<br>Grooved (3-6"; DN80-150 only) | 16<br>10<br>14<br>A1<br>A5<br>J1<br>BD<br>VI | Plastic Tubing & Brass Fittings<br>Copper Tubing & Brass Fittings | PB<br>CB               | 3-Way Control Loop<br>Manual Selector<br>Large Control Filter<br>Valve Position Indicator <sup>(1)</sup><br>Flow Stem <sup>(1)</sup> | X<br>Z<br>F<br>I<br>M | (1) Standard Irrigation Cover & Diaphragm are unfitted to Attributes I, M.<br>Other attributes available on request. |                   |                       |

Other end connections available on request



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC4AE23-RX 06