

# 800 SERIES

ENGINEERING DATA



# CONTENT

|  |    |
|--|----|
| Technical Specifications SI 800 Metric       | 2  |
| Dimensions & Weights SI 800 Metric           | 3  |
| 800 "Y" Pattern                              | 3  |
| 800 Angle                                    | 3  |
| Flow Charts SI 800 Metric                    | 4  |
| Y Pattern, Flat Disc                         | 4  |
| Y Pattern, Throttling Plug (V-Port)          | 4  |
| Flow Charts SI 800 Metric                    | 5  |
| Angle Pattern, Flat Disc                     | 5  |
| Angle Pattern, Throttling Plug (V-Port)      | 5  |
| Cavitation SI 800 Metric                     | 7  |
| Cavitation Guide                             | 7  |
| Cavitation                                   | 7  |
| Technical Specifications US 800 English      | 8  |
| Dimensions & Weights US 800 English          | 9  |
| "Y" Pattern                                  | 9  |
| Angle Pattern                                | 9  |
| Control Chamber Displacement Volume (gallon) | 9  |
| Flow Charts US 800 English                   | 10 |
| Y Pattern, Flat Disc                         | 10 |
| Flow Charts US 800 English                   | 11 |
| Y Pattern, Flat Disc                         | 11 |
| Angle Pattern, Throttling Plug (V-Port)      | 11 |
| Flow Properties US 800 English               | 12 |
| Differential Pressure Calculation            | 12 |
| Cavitation US 800 English                    | 13 |
| Cavitation Guide                             | 13 |
| Cavitation                                   | 13 |
| 800 Valve - Exploded View                    | 14 |
| Pressure Rating                              | 15 |
| Standard Operation Pressure – Materials Data | 15 |
| Valve Plugs Characteristics                  | 16 |
| Typical Pressure Reducing Performance Chart  | 16 |



## Technical Specifications SI 800 Metric

### Series Patterns and Sizes

- 800 Series – "Y" Pattern – DN40-500
- 800 Series – Angle – DN40-450

### Connection Standard

- Flanged: ISO 7005-1 (ISO 10, 16, 25 & 40)

### Water Temperature

- Up to 80°C

### Working pressure

- ISO PN 16: 16 bar
- ISO PN 25: 25 bar
- ISO PN 40: 40 bar

### Standard Materials

- **Main valve body**  
Carbon Steel to EN 10083-1
- **Valve cover (piston cylinder)**  
Stainless Steel or Bronze
- **Main valve internals**  
Stainless Steel and Bronze
- **Control Trim**  
Brass, Bronze accessories  
Stainless Steel 316 fittings & tubing  
or forged Brass fittings & copper tubing
- **Elastomers**  
NBR
- **Coating**  
Blue fusion bonded Epoxy


### Optional Materials

- **Main valve body and Cover**  
Ductile Iron to EN 1563  
Stainless Steel 316 to EN 10088-1  
Nickel Aluminum Bronze to BS-EN 1400 AB-2  
Other materials on request
- **Control Trim**  
Stainless Steel 316, Nickel Aluminum Bronze,  
Hastalloy C-276 accessories  
Monel fittings & tubing
- **Elastomers**  
EPDM  
FPM




## Dimensions & Weights SI 800 Metric

### 800 "Y" Pattern



|               |             | DN   | 40  | 50   | 65  | 80  | 100 | 150 | 200 | 250 | 300 | 350   | 400   | 450   | 500   |
|---------------|-------------|------|-----|------|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|-------|
| ISO PN 10; 16 | L (mm)      | 205  | 210 | 222  | 250 | 320 | 415 | 500 | 605 | 725 | 733 | 990   | 1,000 | 1,100 | 1,100 |
|               | W (mm)      | 156  | 166 | 190  | 200 | 229 | 286 | 344 | 408 | 484 | 536 | 600   | 638   | 716   | 716   |
|               | h (mm)      | 78   | 83  | 95   | 100 | 115 | 143 | 172 | 204 | 242 | 268 | 300   | 319   | 358   | 358   |
|               | H (mm)      | 260  | 265 | 278  | 327 | 409 | 526 | 650 | 763 | 942 | 969 | 1,154 | 1,173 | 1,211 | 1,211 |
|               | P* (mm)     | N/A  | N/A | N/A  | N/A | N/A | 135 | 135 | 142 | 154 | 154 | 191   | 191   | 191   | 191   |
|               | Weight (Kg) | 10.7 | 13  | 16   | 28  | 48  | 94  | 162 | 272 | 455 | 482 | 1,000 | 1,074 | 1,096 | 1,096 |
| ISO PN 25; 40 | L (mm)      | 205  | 210 | 222  | 264 | 335 | 433 | 524 | 637 | 762 | 767 | 1,024 | 1,030 | 1,136 | 1,136 |
|               | W (mm)      | 156  | 166 | 190  | 210 | 254 | 318 | 382 | 446 | 522 | 590 | 650   | 714   | 778   | 778   |
|               | h (mm)      | 78   | 83  | 95   | 105 | 127 | 159 | 191 | 223 | 261 | 295 | 325   | 357   | 389   | 389   |
|               | H (mm)      | 260  | 265 | 278  | 332 | 422 | 542 | 666 | 783 | 961 | 996 | 1,179 | 1,208 | 1,241 | 1,241 |
|               | P* (mm)     | N/A  | N/A | N/A  | N/A | N/A | 135 | 135 | 142 | 154 | 154 | 191   | 191   | 191   | 191   |
|               | Weight (Kg) | 11.8 | 15  | 18.4 | 32  | 56  | 106 | 190 | 307 | 505 | 549 | 1,070 | 1,095 | 1,129 | 1,129 |

### 800 Angle




|               |             | DN   | 40  | 50   | 65  | 80  | 100 | 150 | 200 | 250 | 300 | 350   | 400   | 450   |
|---------------|-------------|------|-----|------|-----|-----|-----|-----|-----|-----|-----|-------|-------|-------|
| ISO PN 10; 16 | L (mm)      | 124  | 124 | 149  | 152 | 190 | 225 | 265 | 320 | 396 | 400 | 450   | 450   | 450   |
|               | W (mm)      | 156  | 166 | 190  | 200 | 229 | 285 | 344 | 408 | 496 | 528 | 598   | 640   | 640   |
|               | R (mm)      | 78   | 83  | 95   | 100 | 115 | 143 | 172 | 204 | 248 | 264 | 299   | 320   | 320   |
|               | h (mm)      | 85   | 85  | 109  | 102 | 127 | 152 | 203 | 219 | 273 | 279 | 369   | 370   | 370   |
|               | H (mm)      | 252  | 252 | 271  | 308 | 390 | 476 | 619 | 717 | 911 | 915 | 1,144 | 1,144 | 1,144 |
|               | P* (mm)     | N/A  | N/A | N/A  | N/A | N/A | 141 | 141 | 156 | 156 | 156 | 195   | 195   | 195   |
|               | Weight (Kg) | 10.7 | 13  | 16   | 26  | 46  | 90  | 153 | 259 | 433 | 459 | 950   | 1,020 | 1,020 |
| ISO PN 25; 40 | L (mm)      | 124  | 124 | 149  | 159 | 200 | 234 | 277 | 336 | 415 | 419 | 467   | 467   | 467   |
|               | W (mm)      | 150  | 155 | 190  | 200 | 254 | 318 | 381 | 446 | 522 | 586 | 650   | 716   | 716   |
|               | R (mm)      | 78   | 85  | 95   | 105 | 127 | 159 | 191 | 223 | 261 | 293 | 325   | 358   | 358   |
|               | h (mm)      | 85   | 85  | 109  | 109 | 135 | 165 | 216 | 236 | 294 | 299 | 386   | 386   | 386   |
|               | H (mm)      | 252  | 264 | 271  | 315 | 398 | 491 | 632 | 733 | 930 | 935 | 1,160 | 1,160 | 1,160 |
|               | P* (mm)     | N/A  | N/A | N/A  | N/A | N/A | 141 | 141 | 156 | 156 | 156 | 195   | 195   | 195   |
|               | Weight (Kg) | 11.8 | 15  | 18.4 | 30  | 54  | 101 | 179 | 292 | 481 | 523 | 1,017 | 1,051 | 1,051 |

### Control Chamber Displacement Volume (liter)



| DN  | 40   | 50   | 65   | 80   | 100 | 150 | 200 | 250 | 300 | 350 | 400  | 450  | 500  | 600-900 |
|-----|------|------|------|------|-----|-----|-----|-----|-----|-----|------|------|------|---------|
| 800 | 0.04 | 0.04 | 0.04 | 0.12 | 0.3 | 1.1 | 2.3 | 4   | 8   | 8   | 18.7 | 18.7 | 18.7 | N/A     |




## Flow Charts SI 800 Metric



### Y Pattern, Flat Disc

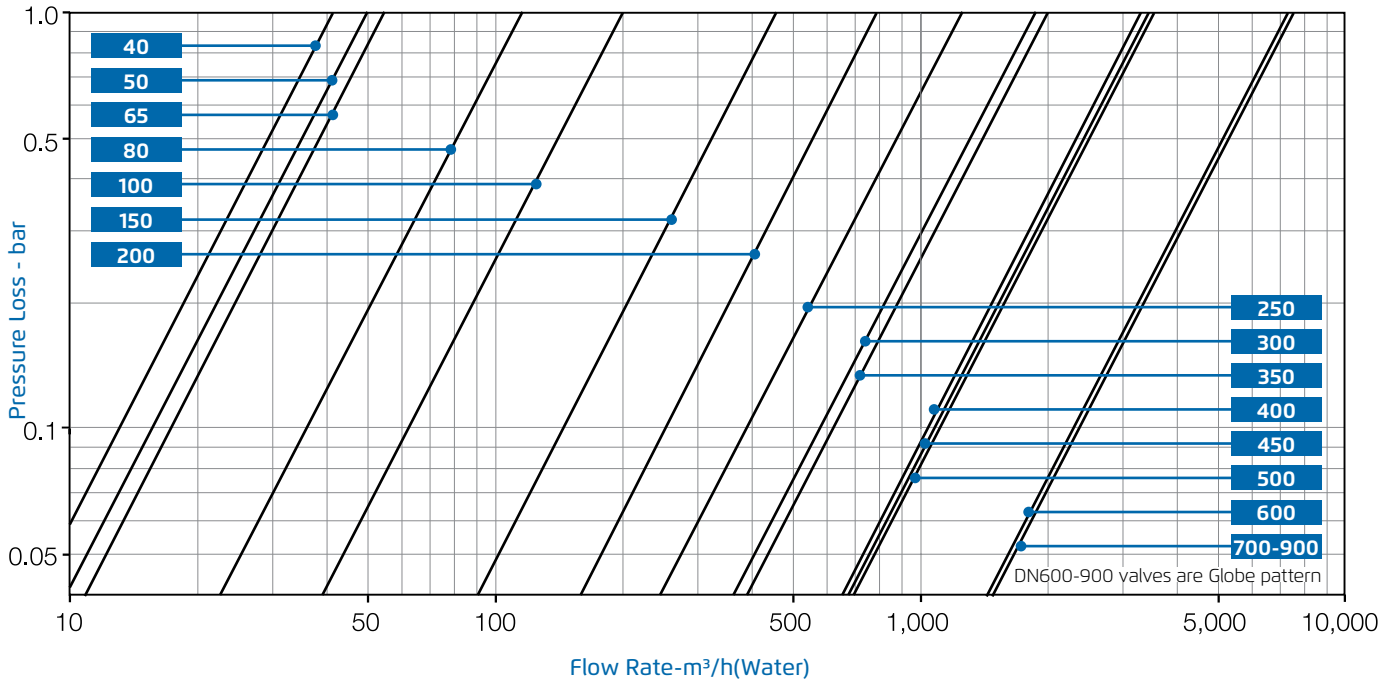


### Y Pattern, Throttling Plug (V-Port)


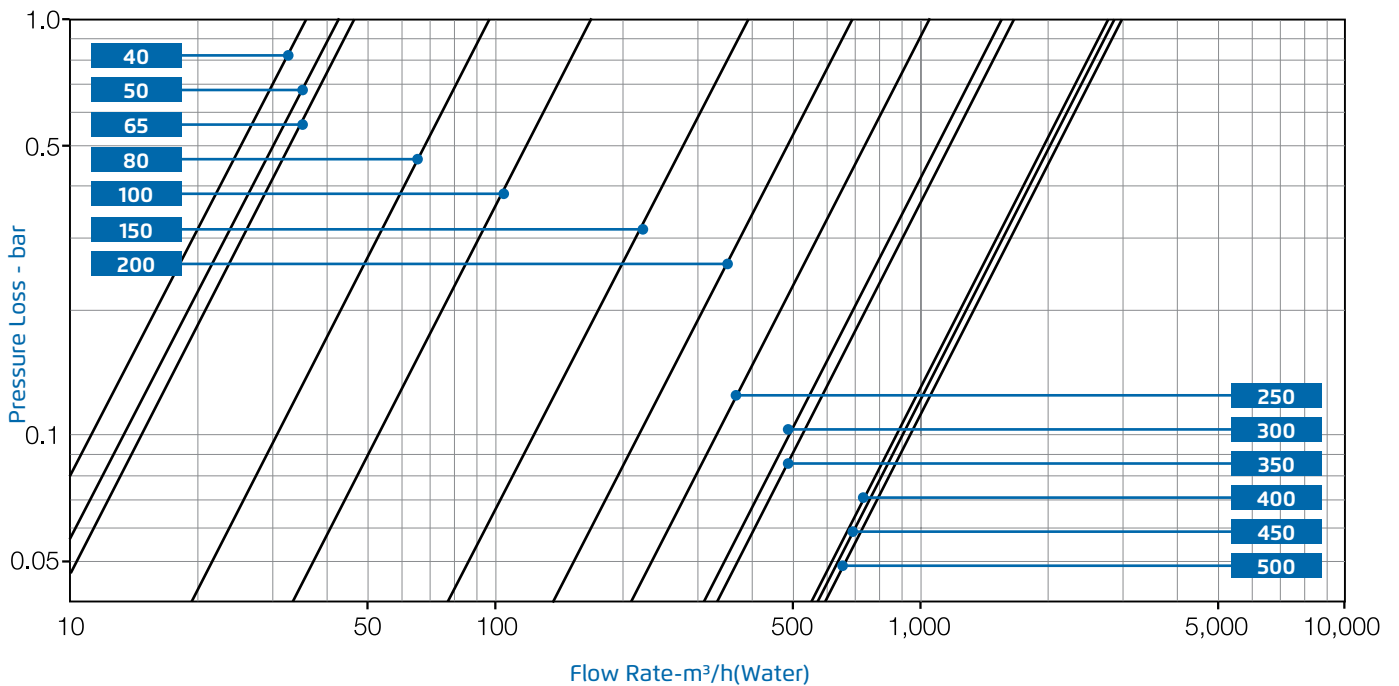





## Flow Charts SI 800 Metric



### Angle Pattern, Flat Disc

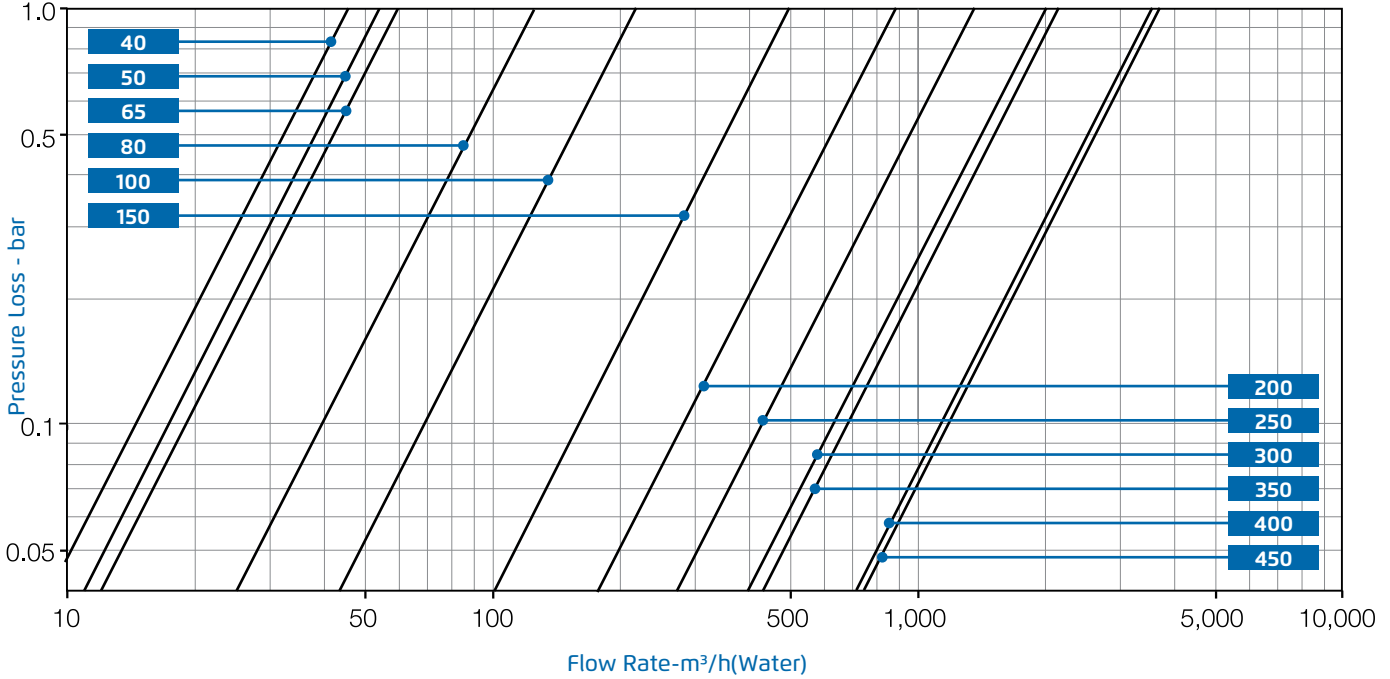

### Angle Pattern, Throttling Plug (V-Port)

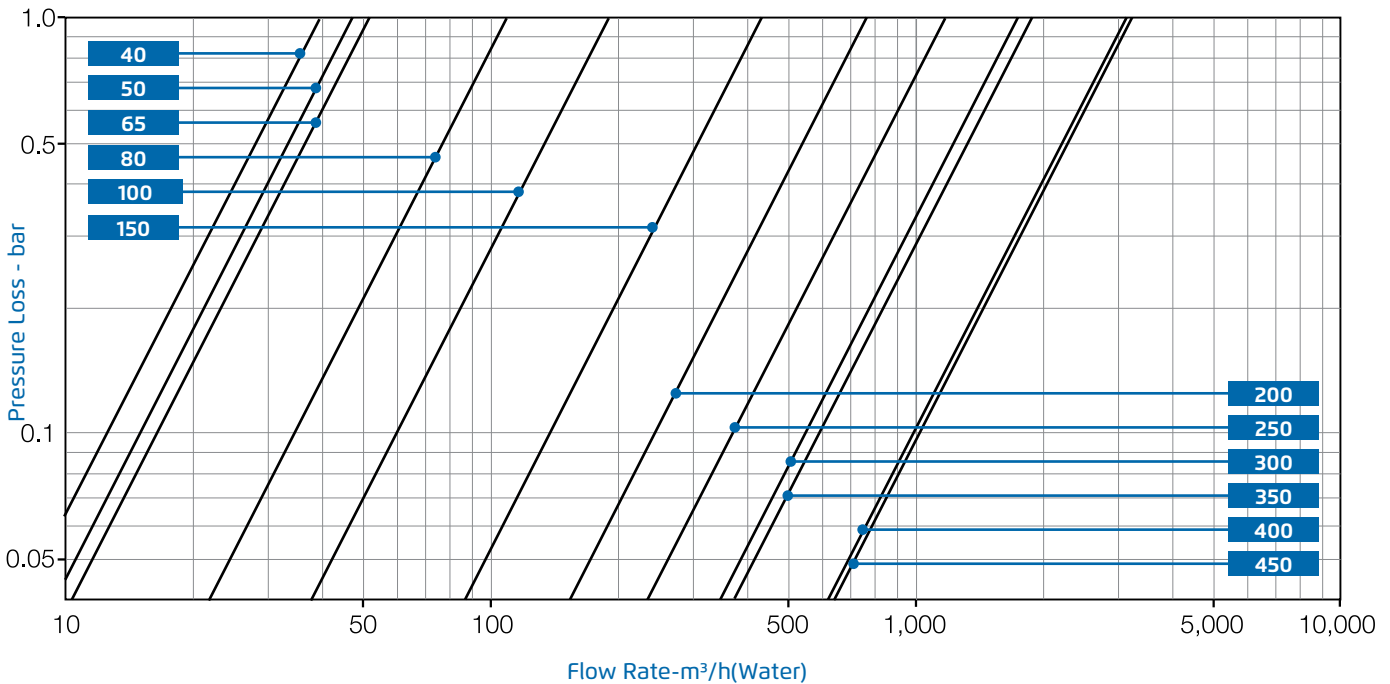



## Flow Properties SI 800 Metric

|                               |         | DN  | 40   | 50   | 6    | 80   | 100 | 125  | 150  | 200  | 250   | 300   | 350   | 400   | 450   | 500   |
|-------------------------------|---------|-----|------|------|------|------|-----|------|------|------|-------|-------|-------|-------|-------|-------|
| 800<br>Y-Pattern<br>Flat Disc |         | Kv  | 42   | 50   | 55   | 115  | 200 | N/A  | 460  | 815  | 1,250 | 1,850 | 1,990 | 3,310 | 3,430 | 3,550 |
|                               | K       | 2.3 | 3.9  | 9.2  | 4.9  | 3.9  | N/A | 3.7  | 3.8  | 3.9  | 3.7   | 5.9   | 3.7   | 5.5   | 7.8   |       |
|                               | Leq - m | 4.3 | 10.3 | 33.4 | 21.6 | 23   | N/A | 37.5 | 53.9 | 70   | 85.6  | 159.9 | 112.7 | 204.8 | 323.8 |       |
| 800<br>Y-Pattern<br>V-Port    |         | Kv  | 36   | 43   | 47   | 98   | 170 | N/A  | 391  | 693  | 1,063 | 1,573 | 1,692 | 2,814 | 2,916 | 3,018 |
|                               | K       | 3.1 | 5.4  | 12.8 | 6.7  | 5.4  | N/A | 5.2  | 5.2  | 5.4  | 5.1   | 8.2   | 5.1   | 7.6   | 10.8  |       |
|                               | Leq - m | 6   | 14.3 | 46.2 | 29.9 | 31.9 | N/A | 51.9 | 74.6 | 96.8 | 118.4 | 221.3 | 155.9 | 283.5 | 448.1 |       |
| 800<br>Angle<br>Flat Disc     |         | Kv  | 46   | 55   | 61   | 127  | 220 | N/A  | 506  | 897  | 1,375 | 2,035 | 2,189 | 3,641 | 3,773 | N/A   |
|                               | K       | 1.9 | 3.2  | 7.6  | 4    | 3.2  | N/A | 3.1  | 3.1  | 3.2  | 3.1   | 4.9   | 3     | 4.5   | N/A   |       |
|                               | Leq - m | 3.6 | 8.5  | 27.6 | 17.8 | 19   | N/A | 31   | 44.6 | 57.8 | 70.7  | 132.1 | 93.1  | 169.3 | N/A   |       |
| 800<br>Angle<br>V-Port        |         | Kv  | 39   | 47   | 51   | 108  | 187 | N/A  | 430  | 762  | 1,169 | 1,730 | 1,861 | 3,095 | 3,207 | N/A   |
|                               | K       | 2.6 | 4.5  | 10.6 | 5.6  | 4.5  | N/A | 4.3  | 4.3  | 4.5  | 4.2   | 6.8   | 4.2   | 6.2   | N/A   |       |
|                               | Leq - m | 5   | 11.8 | 38.2 | 24.7 | 26.4 | N/A | 42.9 | 61.7 | 80   | 97.9  | 182.9 | 128.9 | 234.3 | NA    |       |

### Differential Pressure Calculation

Valve flow coefficient, Kv or Cv  $Kv(Cv) = Q \sqrt{\frac{Gf}{\Delta P}}$

Where:

Kv = Valve flow coefficient (flow in m<sup>3</sup>/h at 1bar ΔP)

Cv = Valve flow coefficient (flow in gpm at 1psi ΔP)

(Cv = 1.155 Kv)

Q = Flow rate (m<sup>3</sup>/h ; gpm)

ΔP = Differential pressure (bar ; psi)

Gf = Liquid specific gravity (Water = 1.0)

Practical formulas for water:

$$Q = Kv \sqrt{\Delta P} \quad \Delta P = \left( \frac{Q}{Kv} \right)^2$$

Flow resistance or Head loss coefficient,  $K = \Delta H \frac{2g}{V^2}$

Where:

K = Flow resistance or Head loss coefficient (dimensionless)

ΔH = Head loss (m ; feet)

V = Nominal size flow velocity (m/sec ; feet/sec.)

g = Acceleration of gravity (9.81 m/sec<sup>2</sup> ; 32.18 feet/sec<sup>2</sup>)

Practical formula:

$$\Delta H = K \frac{V^2}{2g}$$

### Equivalent Pipe Length - Leq

In order to simplify system head loss calculation, add the Leq value to the pipe length of the relevant size


**Note:**

The Leq values given are for general consideration only. Actual Leq may vary somewhat with each of the valve sizes.



# Cavitation SI 800 Metric

## Cavitation Guide

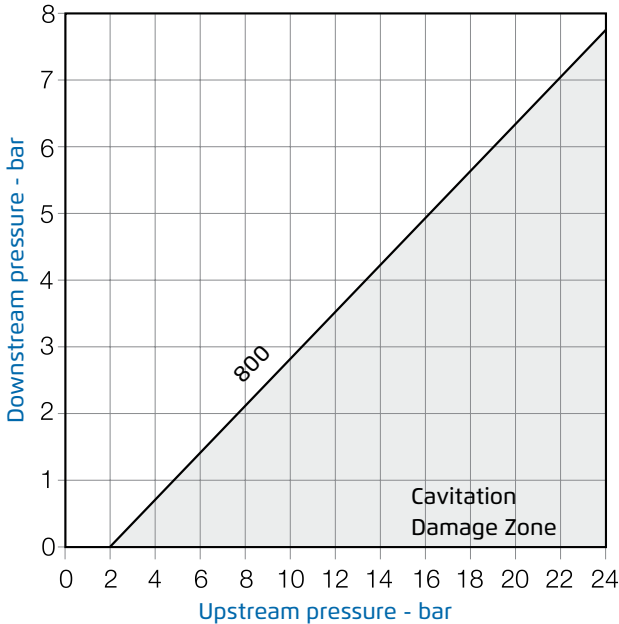

## Cavitation

The cavitation phenomenon has a significant affect on control valve and system performance.

Cavitation may damage the valve and piping by the affects of erosion and vibration. Cavitation also generates noise and may limit and ultimately choke the flow.

As the pressure differential across the valve increases, the static pressure of the flow passing through the throttling area of the valve (Vena Contracta) drops sharply.

When the fluid's static pressure reaches liquid vapor pressure, vapor cavities (bubbles) form and grow until they violently implode by the recovered pressure downstream to the valve seat.

The implosion of these cavities generates high-pressure surges, micro jets and intensive heat, which erode valve components and downstream piping. In its final stage, cavitation flashes and chokes the flow.

The above Cavitation Guides for Bermad 700 Series valves are based on the formula commonly used in the valve industry:

$$\sigma = (P2 - Pv) / (P1 - P2)$$

### Where:

- σ = Sigma, cavitation index, dimensionless
- P1 = Upstream pressure, absolute
- P2 = Downstream pressure, absolute
- Pv = Liquid vapor pressure, absolute  
(Water, 18°C = 0.02 bar-a ; 65°F = 0.3 psi-a)

Use these guides and your applications upstream and downstream pressures to determine whether their intersection lies in or out of the cavitation damage zone.

Considerations to avoid cavitation damage:

- A) Reduce system pressure in stages designing each pressure stage to be above cavitation conditions.
- B) Consider using other valve selection criteria
  - a. Valve body and plug type
  - b. Valve size
  - c. Valve material

### Notes:

1. An alternate cavitation index formula introduced by ISA is:  
 $\sigma_{ISA} = (P1 - Pv) / (P1 - P2)$  which equals  $\sigma + 1$
2. The above charts should be considered only as a general guide.
3. For optimum system and control valve applicatio please consult Bermad.





## Technical Specifications US 800 English

### Series Patterns and Sizes

- 800 Series – Y Pattern – 11/2"-20"
- 800 Series – Angle – 11/2"-18"

### Connection Standard

- Flanged: ANSI B16.5 (Cast steel)

### Water Temperature

- Up to 180°F

### Working pressure

- Class #150: 250 psi
- Class #300: 400 psi
- Class #400: 600 psi

### Standard Materials

- **Main valve body**  
Carbon Steel to ASTM A-216-WCB
- **Valve cover (piston cylinder)**  
Stainless Steel or Bronze
- **Main valve internals**  
Stainless Steel and Bronze
- **Control Trim**  
Brass, Bronze accessories  
Stainless Steel 316 fittings & tubing  
or forged Brass fittings & Copper tubing
- **Elastomers**  
NBR
- **Coating**  
Blue fusion bonded Epoxy


### Optional Materials

- Main valve body and Cover  
Ductile Iron to ASTM A-536  
Stainless Steel 316 to ASTM A-743 CF8M  
Nickel Aluminum Bronze to ASTM B-148 C 95800  
Other materials on request
- Control Trim  
Stainless Steel 316, Nickel Aluminum Bronze,  
Hastalloy C-276 accessories  
Monel fittings & tubing
- Elastomers  
EPDM  
FPM




## Dimensions & Weights US 800 English

### "Y" Pattern



|               | inch        | 1 1/2" | 2"   | 2 1/2" | 3"   | 4"   | 6"   | 8"   | 10"  | 12"   | 14"   | 16"   | 18"   | 20"   |
|---------------|-------------|--------|------|--------|------|------|------|------|------|-------|-------|-------|-------|-------|
| ANSI 150      | L           | 8.1    | 8.3  | 8.7    | 9.8  | 12.6 | 16.3 | 19.7 | 23.8 | 28.5  | 28.9  | 39    | 39.4  | 43.3  |
|               | W           | 6.1    | 6.5  | 7.5    | 7.9  | 9.0  | 11.3 | 13.5 | 16.1 | 19.1  | 21.1  | 23.6  | 25.1  | 28.2  |
|               | h           | 3.1    | 3.3  | 3.7    | 3.9  | 4.5  | 5.6  | 6.8  | 8    | 9.5   | 10.6  | 11.8  | 12.6  | 14.1  |
|               | H           | 10.2   | 10.4 | 10.9   | 12.9 | 16.1 | 20.7 | 25.6 | 30   | 37.1  | 38.1  | 45.4  | 46.2  | 47.7  |
|               | P*          | N/A    | N/A  | N/A    | N/A  | N/A  | 5.3  | 5.3  | 5.6  | 6.1   | 6.1   | 7.5   | 7.5   | 7.5   |
|               | Weight (lb) | 24     | 29   | 35     | 62   | 106  | 207  | 356  | 598  | 1,001 | 1,060 | 2,200 | 2,363 | 2,411 |
| ANSI 300; 400 | L           | 8.1    | 8.3  | 8.7    | 10.4 | 13.2 | 17   | 20.6 | 25.1 | 30    | 30.2  | 40.3  | 40.6  | 44.7  |
|               | W           | 6.1    | 6.5  | 7.5    | 8.3  | 10.0 | 12.5 | 15.0 | 17.6 | 20.6  | 23.2  | 25.6  | 28.1  | 30.6  |
|               | h           | 3.1    | 3.3  | 3.7    | 4.1  | 5    | 6.3  | 7.5  | 8.8  | 10.3  | 11.6  | 12.8  | 14.1  | 15.3  |
|               | H           | 10.2   | 10.4 | 10.9   | 13.1 | 16.6 | 21.3 | 26.2 | 30.8 | 37.8  | 39.2  | 46.4  | 47.6  | 48.9  |
|               | P*          | N/A    | N/A  | N/A    | N/A  | N/A  | 5.3  | 5.3  | 5.6  | 6.1   | 6.1   | 7.5   | 7.5   | 7.5   |
|               | Weight (lb) | 26     | 33   | 40     | 70   | 123  | 233  | 418  | 675  | 1,111 | 1,208 | 2,354 | 2,409 | 2,484 |

### Angle Pattern



|               | inch        | 1 1/2" | 2"   | 2 1/2" | 3"   | 4"   | 6"   | 8"   | 10"  | 12"   | 14"   | 16"   | 18"   |
|---------------|-------------|--------|------|--------|------|------|------|------|------|-------|-------|-------|-------|
| ANSI 150      | L           | 4.9    | 4.9  | 5.9    | 6    | 7.5  | 8.9  | 10.4 | 12.6 | 15.6  | 15.7  | 17.7  | 17.7  |
|               | W           | 6.1    | 6.5  | 7.5    | 7.9  | 9.0  | 11.2 | 13.5 | 16.1 | 19.5  | 20.8  | 23.5  | 25.2  |
|               | h           | 3.1    | 3.3  | 3.7    | 3.9  | 4.5  | 5.6  | 6.8  | 8.0  | 9.8   | 10.4  | 11.8  | 12.6  |
|               | H           | 9.9    | 9.9  | 10.7   | 12.1 | 15.4 | 18.7 | 24.4 | 28.2 | 35.9  | 36    | 45    | 45    |
|               | P*          | N/A    | N/A  | N/A    | N/A  | N/A  | 5.6  | 5.6  | 6.1  | 6.1   | 6.1   | 7.7   | 7.7   |
|               | Weight (lb) | 24     | 29   | 35     | 57   | 101  | 198  | 337  | 570  | 953   | 1,010 | 2,090 | 2,244 |
| ANSI 300; 400 | L           | 4.9    | 4.9  | 5.9    | 6.3  | 7.9  | 9.2  | 10.9 | 13.2 | 16.3  | 16.5  | 18.4  | 18.4  |
|               | W           | 5.9    | 6.1  | 7.5    | 7.9  | 10.0 | 12.5 | 15.0 | 17.6 | 20.6  | 23.1  | 25.6  | 28.2  |
|               | h           | 3.1    | 3.3  | 3.7    | 4.1  | 5    | 6.3  | 7.5  | 8.8  | 10.3  | 11.5  | 12.8  | 14.1  |
|               | H           | 9.9    | 10.4 | 10.7   | 12.4 | 15.7 | 19.3 | 24.9 | 28.9 | 36.6  | 36.8  | 45.7  | 45.7  |
|               | P*          | N/A    | N/A  | N/A    | N/A  | N/A  | 5.6  | 5.6  | 6.1  | 6.1   | 6.1   | 7.7   | 7.7   |
|               | Weight (lb) | 26     | 33   | 40     | 66   | 119  | 222  | 394  | 642  | 1,058 | 1,151 | 2,237 | 2,312 |


\*P – Height of optional auxiliary closing piston or shaft balancing assembly

### Control Chamber Displacement Volume (gallon)



| Sizes      | 1 1/2"-2 1/2" | 3"   | 4"   | 6"   | 8"   | 10"  | 12"-14" | 16"-20" | 24"-36" |
|------------|---------------|------|------|------|------|------|---------|---------|---------|
| 800 Series | 0.01          | 0.03 | 0.08 | 0.29 | 0.61 | 1.06 | 2.12    | 4.95    | -       |




## Flow Charts US 800 English



### Y Pattern, Flat Disc

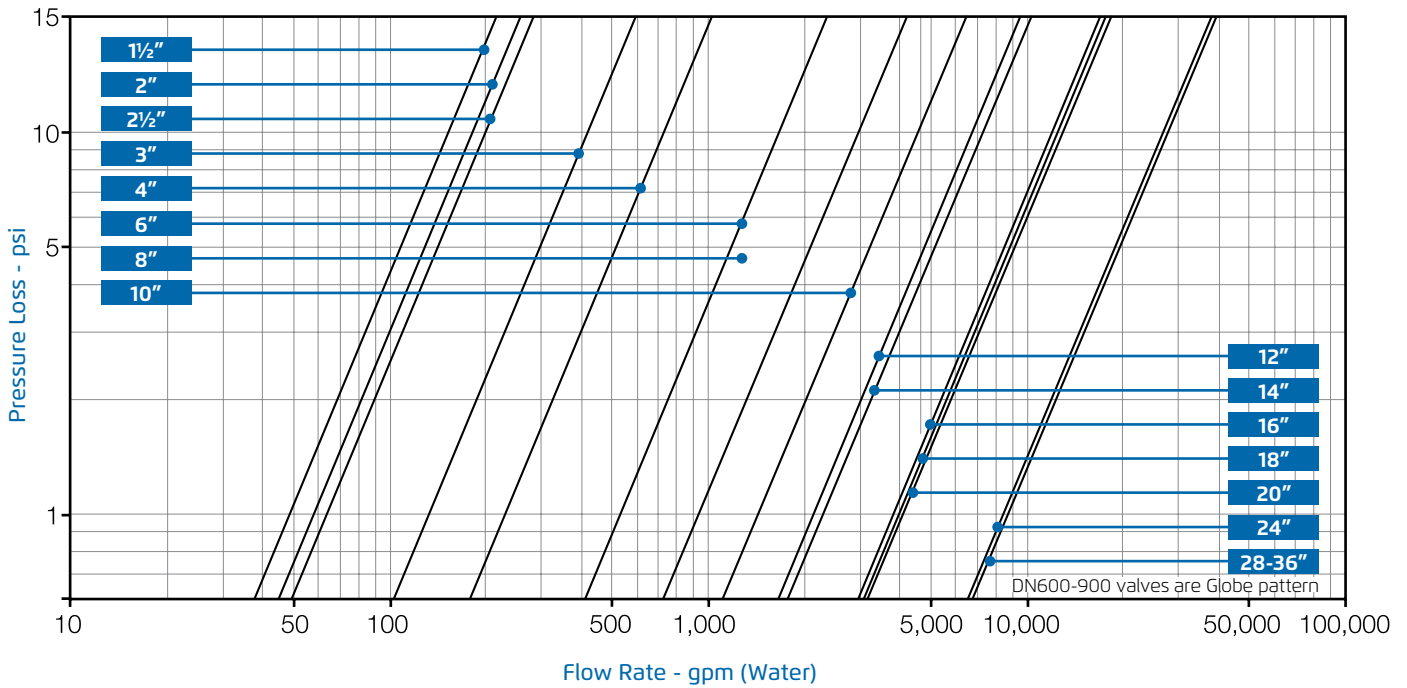

### Y Pattern, Throttling Plug (V-Port)


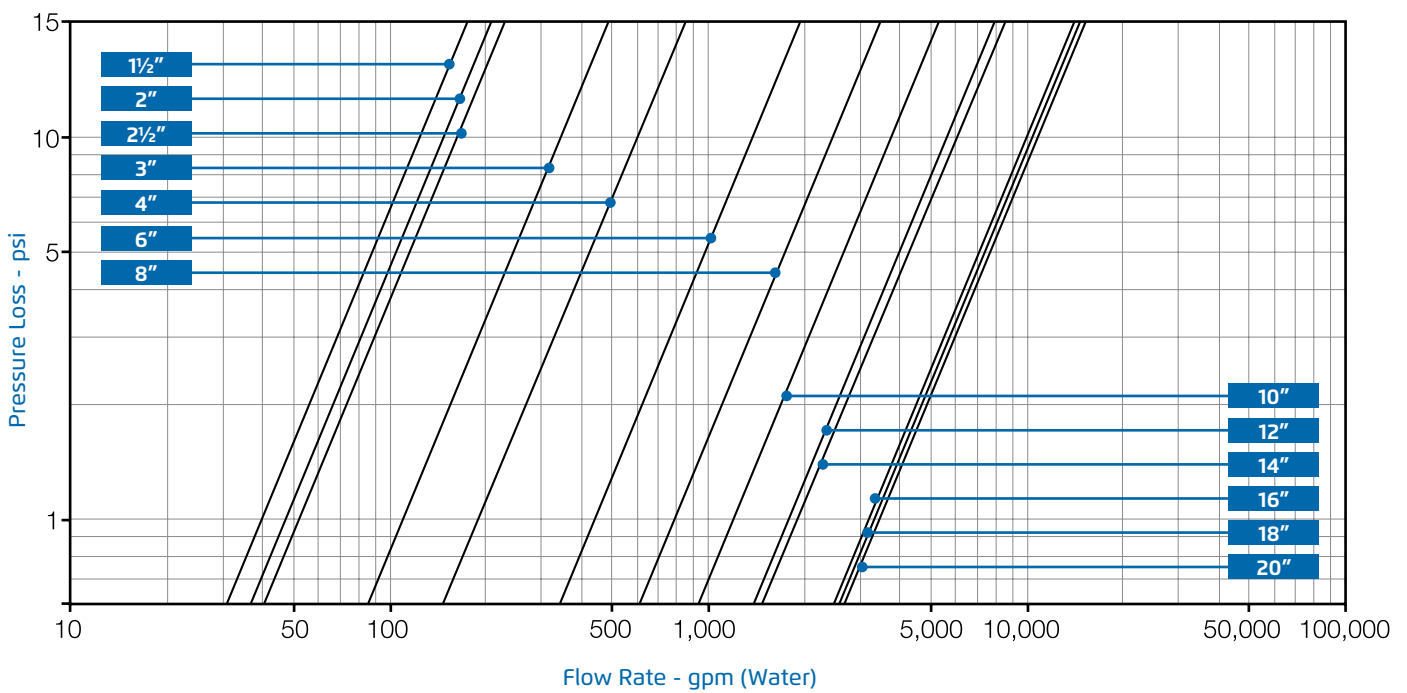





## Flow Charts US 800 English



### Angle Pattern, Flat Disc


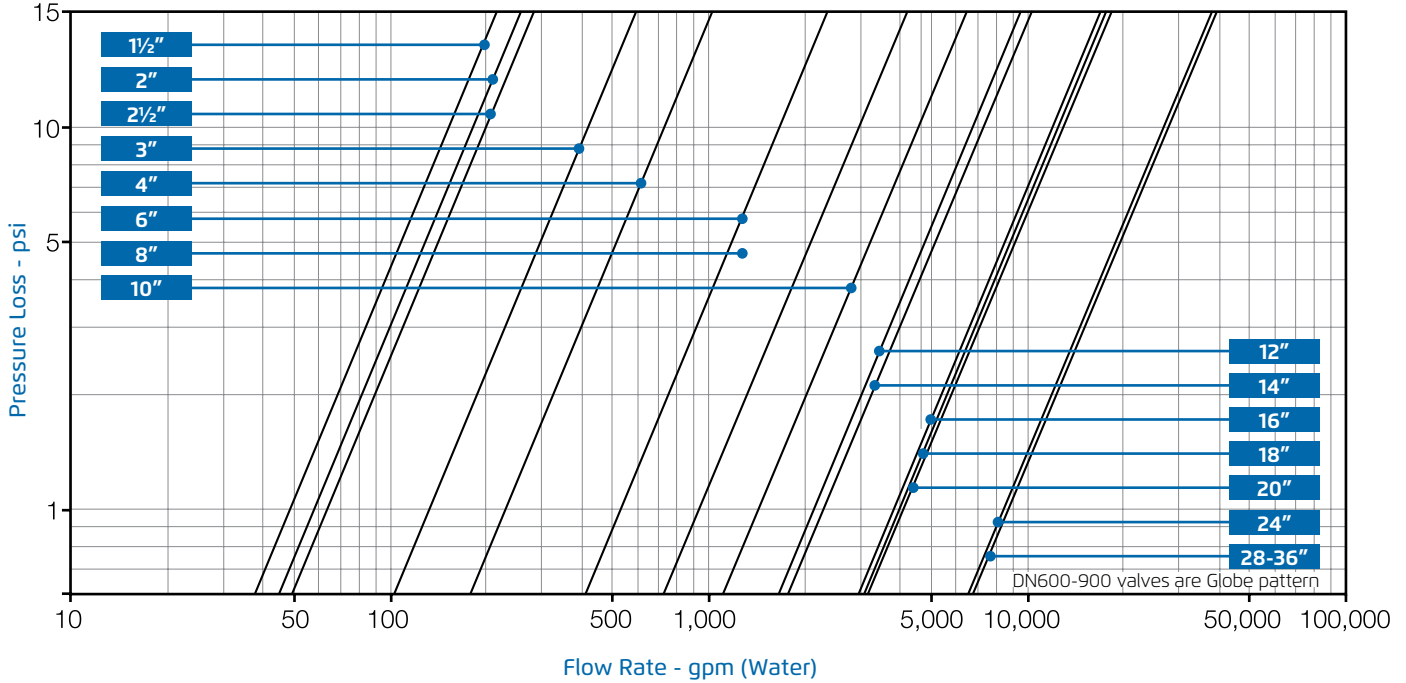




### Angle Pattern, Throttling Plug (V-Port)

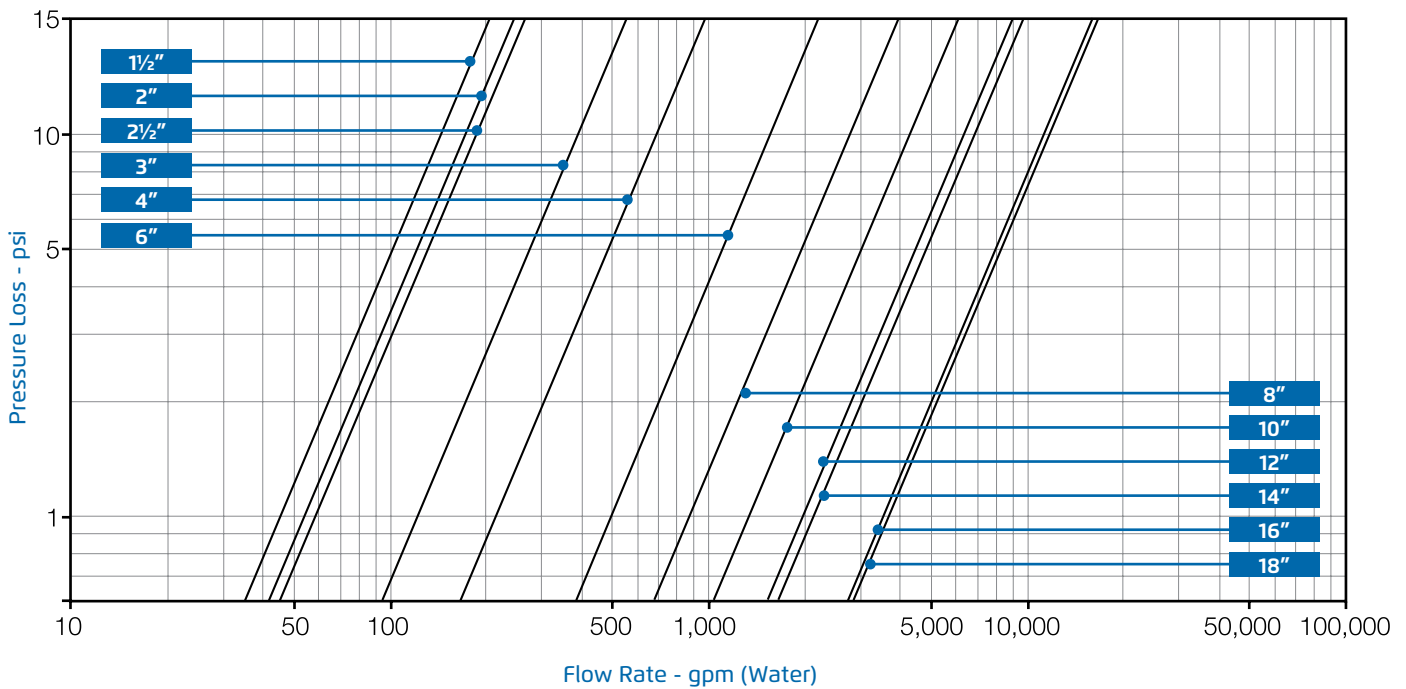



## Flow Properties US 800 English

|   |          | inch | 1.5" | 2"    | 2.5" | 3"    | 4"    | 6"    | 8"    | 10"   | 12"   | 14"   | 16"   | 18"     | 20" |
|---|----------|------|------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|---------|-----|
| Y-Pattern<br>Flat Disc         | Cv       | 49   | 58   | 64    | 133  | 230   | 530   | 940   | 1,440 | 2,140 | 2,300 | 3,820 | 3,960 | 4,100   |     |
|   | K        | 2.3  | 3.9  | 9.2   | 4.9  | 3.9   | 3.7   | 3.8   | 3.9   | 3.7   | 5.9   | 3.7   | 5.5   | 7.8     |     |
|   | Leq-feet | 14.2 | 33.8 | 109.5 | 70.8 | 75.6  | 123.0 | 176.9 | 229.5 | 280.8 | 524.5 | 369.6 | 671.9 | 1,062.3 |     |
| Y-Pattern<br>V-Port            | Cv       | 41   | 49   | 54    | 113  | 200   | 450   | 800   | 1,230 | 1,820 | 1,950 | 3,250 | 3,370 | 3,490   |     |
|   | K        | 3.1  | 5.4  | 12.8  | 6.7  | 5.4   | 5.2   | 5.2   | 5.4   | 5.1   | 8.2   | 5.1   | 7.6   | 10.8    |     |
|   | Leq-feet | 19.7 | 46.8 | 151.6 | 97.9 | 104.6 | 170.2 | 244.8 | 317.6 | 388.6 | 725.9 | 511.6 | 930.0 | 1,470.3 |     |
| Angle<br>Pattern<br>Flat Disc  | Cv       | 53   | 64   | 70    | 146  | 250   | 580   | 1,040 | 1,590 | 2,350 | 2,530 | 4,210 | 4,360 | NA      |     |
|   | K        | 1.9  | 3.2  | 7.6   | 4.0  | 3.2   | 3.1   | 3.1   | 3.2   | 3.1   | 4.9   | 3.0   | 4.5   | NA      |     |
|   | Leq-feet | 11.7 | 28.0 | 90.5  | 58.5 | 62.5  | 101.6 | 146.2 | 189.7 | 232.0 | 433.4 | 305.5 | 555.3 | NA      |     |
| Angle<br>Pattern<br>V-Port     | Cv       | 45   | 54   | 59    | 124  | 220   | 500   | 880   | 1,350 | 2,000 | 2,150 | 3,580 | 3,710 | NA      |     |
|   | K        | 2.6  | 4.5  | 10.6  | 5.6  | 4.5   | 4.3   | 4.3   | 4.5   | 4.2   | 6.8   | 4.2   | 6.2   | NA      |     |
|   | Leq-feet | 16.3 | 38.7 | 125.3 | 80.9 | 86.5  | 140.7 | 202.4 | 262.5 | 321.2 | 599.9 | 422.8 | 768.6 | NA      |     |

### Differential Pressure Calculation

**Valve flow coefficient, Kv or Cv**     $Kv (Cv) = Q \sqrt{\frac{Gf}{\Delta P}}$

Where:

Kv = Valve flow coefficient (flow in m<sup>3</sup>/h at 1bar ΔP)

Cv = Valve flow coefficient (flow in gpm at 1psi ΔP)

(Cv = 1.155 Kv)

Q = Flow rate (m<sup>3</sup>/h ; gpm)

ΔP = Differential pressure (bar ; psi)

Gf = Liquid specific gravity (Water = 1.0)

**Practical formulas for water:**

$$Q = Kv \sqrt{\Delta P} \qquad \Delta P = \left( \frac{Q}{Kv} \right)^2$$

**Flow resistance or Head loss coefficient,**     $K = \Delta H \frac{2g}{V^2}$

Where:

K = Flow resistance or Head loss coefficient (dimensionless)

ΔH = Head loss (m ; feet)

V = Nominal size flow velocity (m/sec ; feet/sec.)

g = Acceleration of gravity (9.81 m/sec<sup>2</sup> ; 32.18 feet/sec<sup>2</sup>)

**Practical formula:**

$$\Delta H = K \frac{V^2}{2g}$$

### Equivalent Pipe Length - Leq

In order to simplify system head loss calculation, add the Leq value to the pipe length of the relevant size


**Note:**

The Leq values given are for general consideration only. Actual Leq may vary somewhat with each of the valve sizes.



# Cavitation US 800 English

## Cavitation Guide

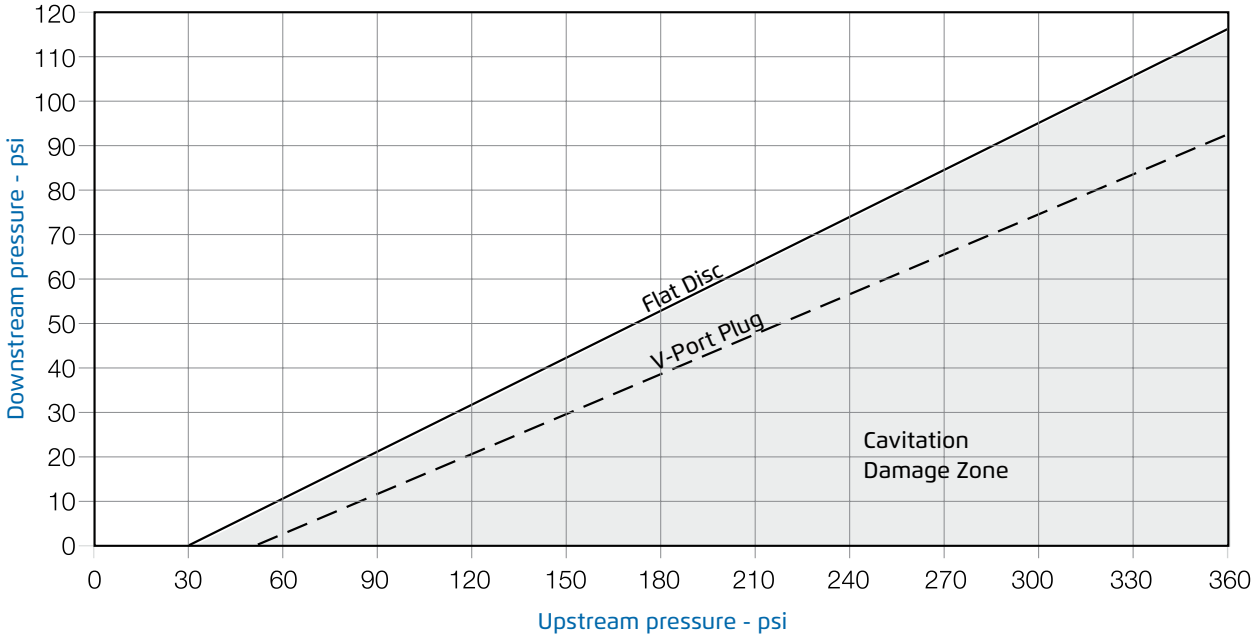

## Cavitation

The cavitation phenomenon has a significant affect on control valve and system performance.

Cavitation may damage the valve and piping by the affects of erosion and vibration. Cavitation also generates noise and may limit and ultimately choke the flow.

As the pressure differential across the valve increases, the static pressure of the flow passing through the throttling area of the valve (Vena Contracta) drops sharply.

When the fluid's static pressure reaches liquid vapor pressure, vapor cavities (bubbles) form and grow until they violently implode by the recovered pressure downstream to the valve seat.

The implosion of these cavities generates high-pressure surges, micro jets and intensive heat, which erode valve components and downstream piping. In its final stage, cavitation flashes and chokes the flow.

The above Cavitation Guides for Bermad 700 Series valves are based on the formula commonly used in the valve industry:

$$\sigma = (P2 - Pv) / (P1 - P2)$$

### Where:

- σ = Sigma, cavitation index, dimensionless
- P1 = Upstream pressure, absolute
- P2 = Downstream pressure, absolute
- Pv = Liquid vapor pressure, absolute  
(Water, 18°C = 0.02 bar-a ; 65°F = 0.3 psi-a)

Use these guides and your applications upstream and downstream pressures to determine whether their intersection lies in or out of the cavitation damage zone.

Considerations to avoid cavitation damage:

- A) Reduce system pressure in stages designing each pressure stage to be above cavitation conditions.
- B) Consider using other valve selection criteria
  - a. Valve body and plug type
  - b. Valve size
  - c. Valve material


### Notes:

1. An alternate cavitation index formula introduced by ISA is:  

$$\sigma_{ISA} = (P1 - Pv) / (P1 - P2)$$
 which equals σ+1
2. The above charts should be considered only as a general guide.
3. For optimum system and control valve applicatio please consult Bermad.



## 800 Valve - Exploded View

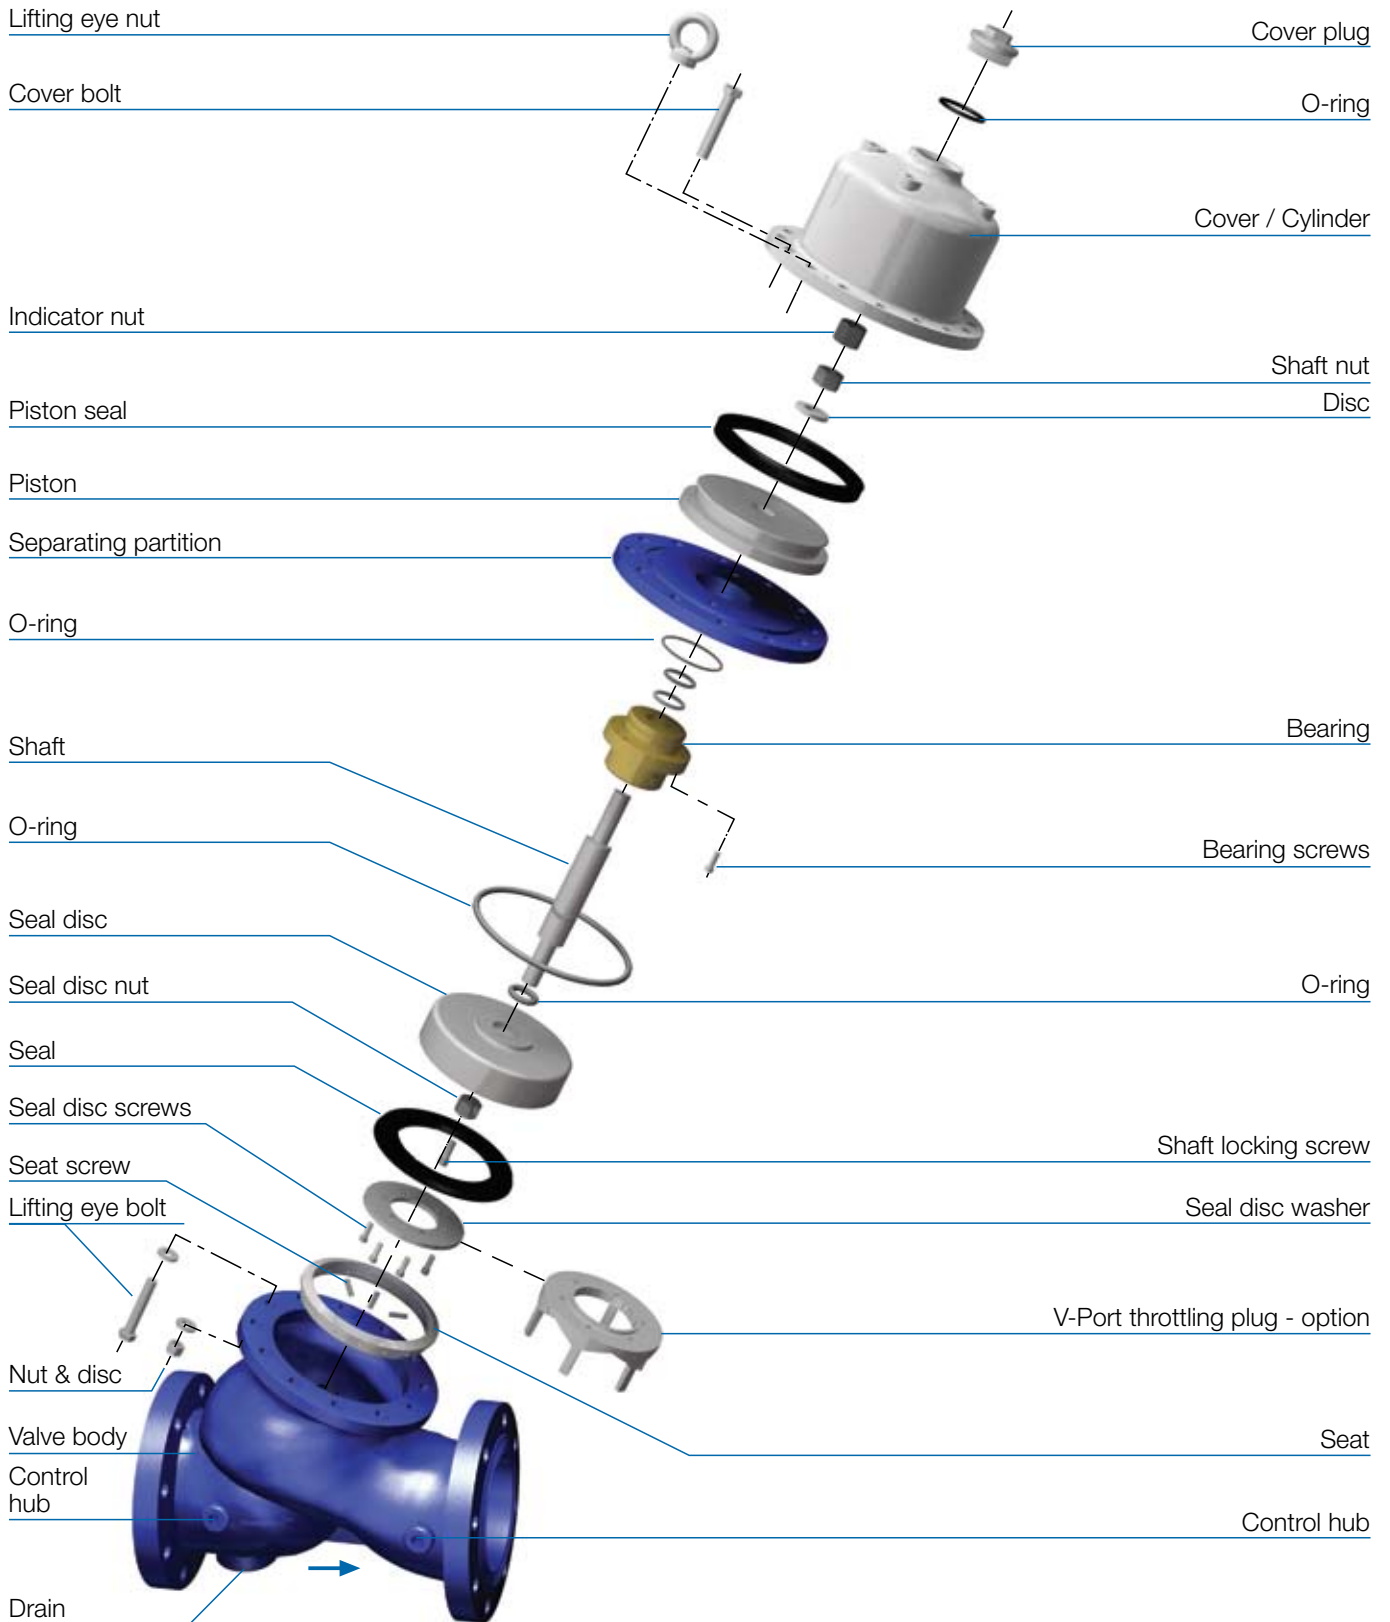



## Pressure Rating

### Standard Operation Pressure – Materials Data

#### End Connections Standards / Pressure Ratings / Materials / Max. Operating Pressure

| Bermad Code | End Connections Standard | Pressure Class | Ductile Iron to ASTM A-536 or EN 1563 | Carbon Steel to ASTM A-216-WCB or EN 10083-1 | Stainless Steel 316 to ASTM A-743 CF8M or EN 10088-1 | Nickel Aluminum Bronze to ASTM B-148 C 95800 or BS-EN 1400 AB-2 |
|-------------|--------------------------|----------------|---------------------------------------|--|--|---|
| 10 or E1    | ISO                      | PN 10          | +                                     | +  | +  | +   |
| 16 or E6    | ISO                      | PN 16          | +                                     | +  | +  | 16 bar  |
| 25 or E5    | ISO                      | PN 25          | 25 bar                                | 25 bar                                       | 25 bar   | 25 bar  |
| 40          | ISO                      | PN 40 *        | –                                     | 40 bar                                       | 40 bar   | –   |
| A5          | ANSI                     | # 150          | 250 psi                               | 285 psi                                      | 285 psi  | 250 psi   |
| A3          | ANSI                     | # 300          | 400 psi                               | 400 psi                                      | 400 psi  | 400 psi   |
| A4          | ANSI                     | # 400 *        | –                                     | 600 psi                                      | 600 psi  | –   |
| BD          | BS 10                    | Table D        | +                                     | +  | +  | +   |
| BH          | BS 10                    | Table H        | 400 psi                               | 400 psi                                      | 400 psi  | 400 psi   |
| J1          | JIS                      | 10 K           | +                                     | +  | +  | +   |
| J6          | JIS                      | 16 K           | 27 bar                                | 27 bar                                       | 27 bar   | 27 bar  |
| J2          | JIS                      | 20 K           | 28 bar                                | 28 bar                                       | 28 bar   | 28 bar  |
| J3          | JIS                      | 30 K *         | –                                     | 40 bar                                       | 40 bar   | –   |
| B1          | ABNT                     | 10             | +                                     | +  | +  | +   |
| B6          | ABNT                     | 16             | +                                     | +  | +  | 16 bar  |
| B2          | ABNT                     | 25             | 25 bar                                | 25 bar                                       | 25 bar   | 25 bar  |
|             | Threads                  |                |                                       |  |  |   |
| BP          | BSP (Rp ISO 7/1)         |                |                                       |  |  |   |
| PH          | BSP (Rp ISO 7/1)         |                | 25 bar                                | 25 bar                                       | 25 bar   | 25 bar  |
| NP          | NPT                      |                |                                       |  |  |   |
| NH          | NPT                      |                | 400 psi                               | 400 psi                                      | 400 psi  | 400 psi   |


External flange diameter might vary from the standard.

\* Can be used in 800 series only.

+ Available, Not required by the standard pressure class


– Not available






### Valve Plugs Characteristics

Kv ; Cv to Valve Opening Chart

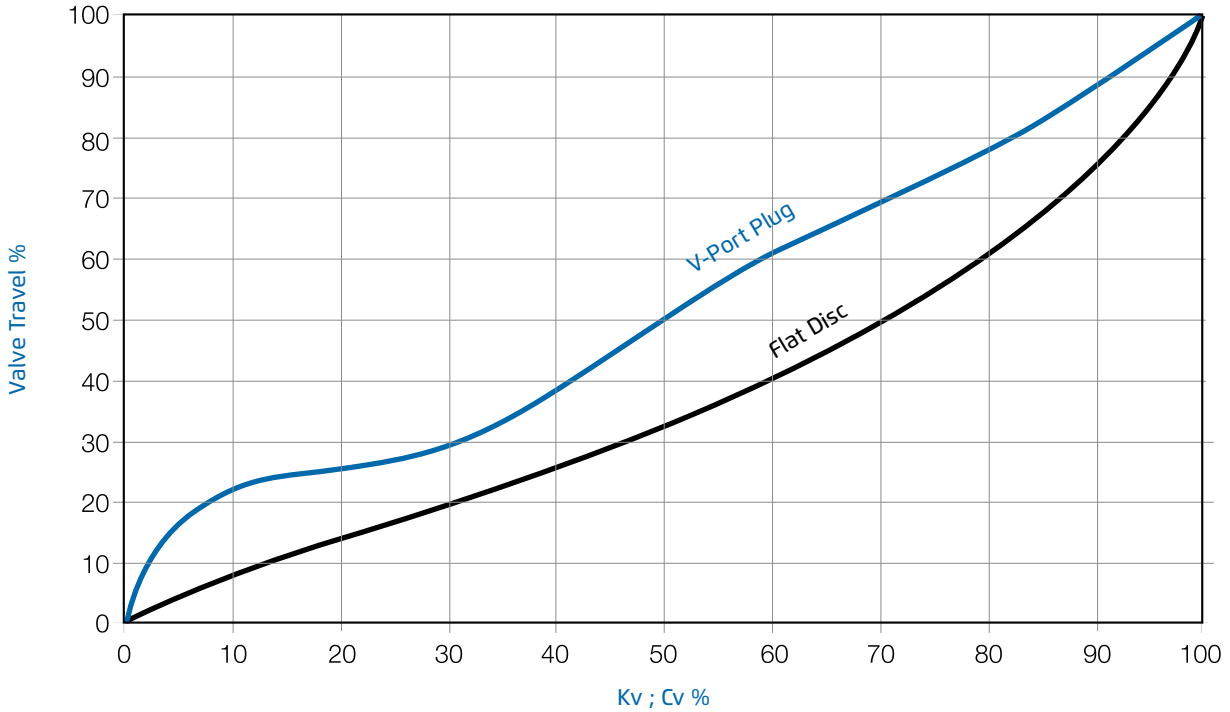

### Typical Pressure Reducing Performance Chart

Actual Hydraulic Laboratory Results

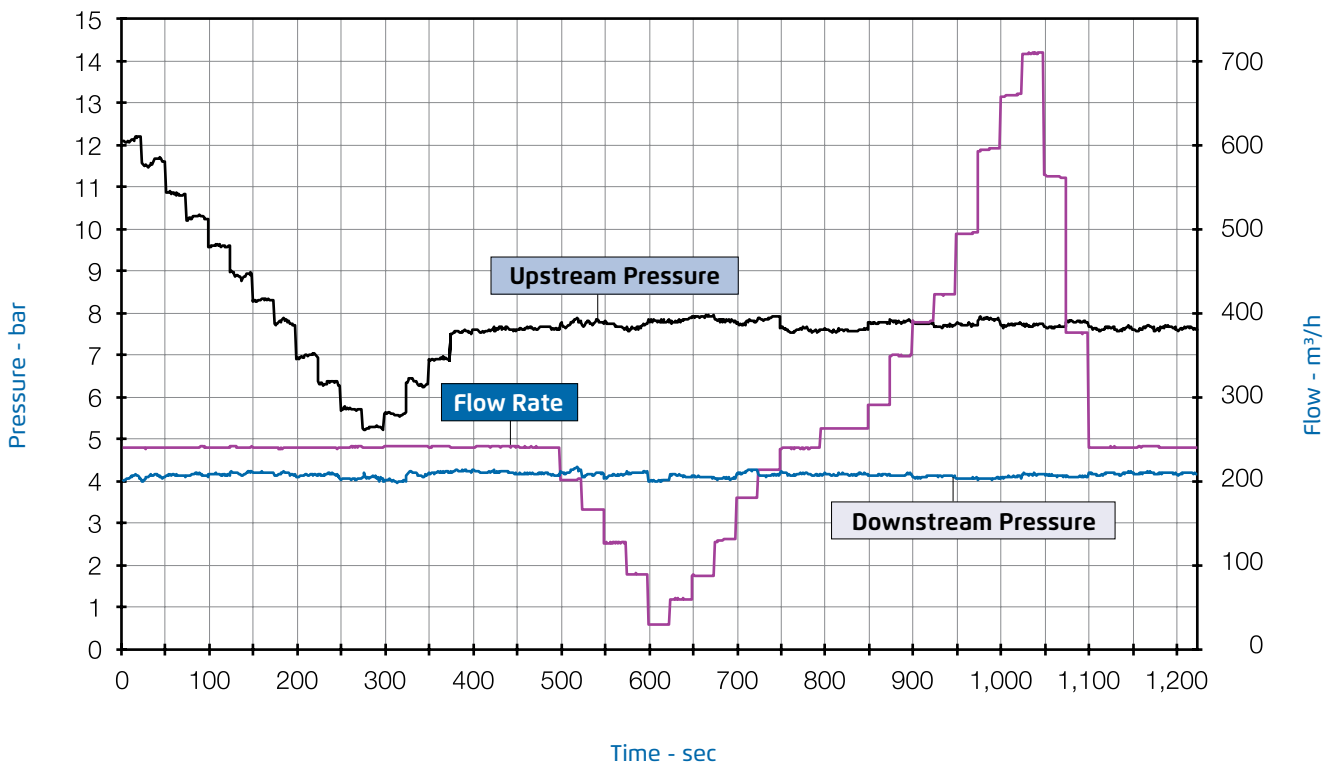




## International Standards

|          |                                  |   |
|----------|----------------------------------|---|
|          | INTERNATIONAL                    | ISO 9001-2015 Certified Quality Assurance System  |
| ISO 9001 | INTERNATIONAL                    | ISO 9001-2015 Certified Quality Assurance System  |
|          | WRAS, UK                         | The product complies with the Water Regulation Advisory Scheme of UK and BS 6920  |
|          | DVGW, Germany                    | Compliance with the European Standard EN 1074 – Valves for water supply and German Standards KTW and W270   |
|          | ACS, France                      | Tests are based on the French Sanitary standard   |
|          | BELGAQUA, Belgium                | The product complies with the Belgian Standards for materials in contact with drinking water  |
|          | NSF USA                          | The product complies with the NSF/ ANSI 61 Std. – Valves for Water Supply and NSF 372 low lead  |
|          | Bulgarcontrola, Bulgaria         | Compliance of Bermad Automatic Control Valves with the sanitary requirements of Bulgaria and with the EN 1074 European Standard for Valves for Water Supply |
|          | PZH, Poland                      | Compliance of Bermad Automatic Control Valves with the Polish sanitary requirements   |
|          | AUSTRALIA AS 5081 and water mark | Control valves for waterworks purposes  |
|          | RUSSIAN Customs Union            | Valves For Water Supply   |
|          | KOREA                            | Valves For Water Supply   |

BERMAD valves comply with a wide range of international standards. Please consult with BERMAD about the compliance of a required model to a specific standard

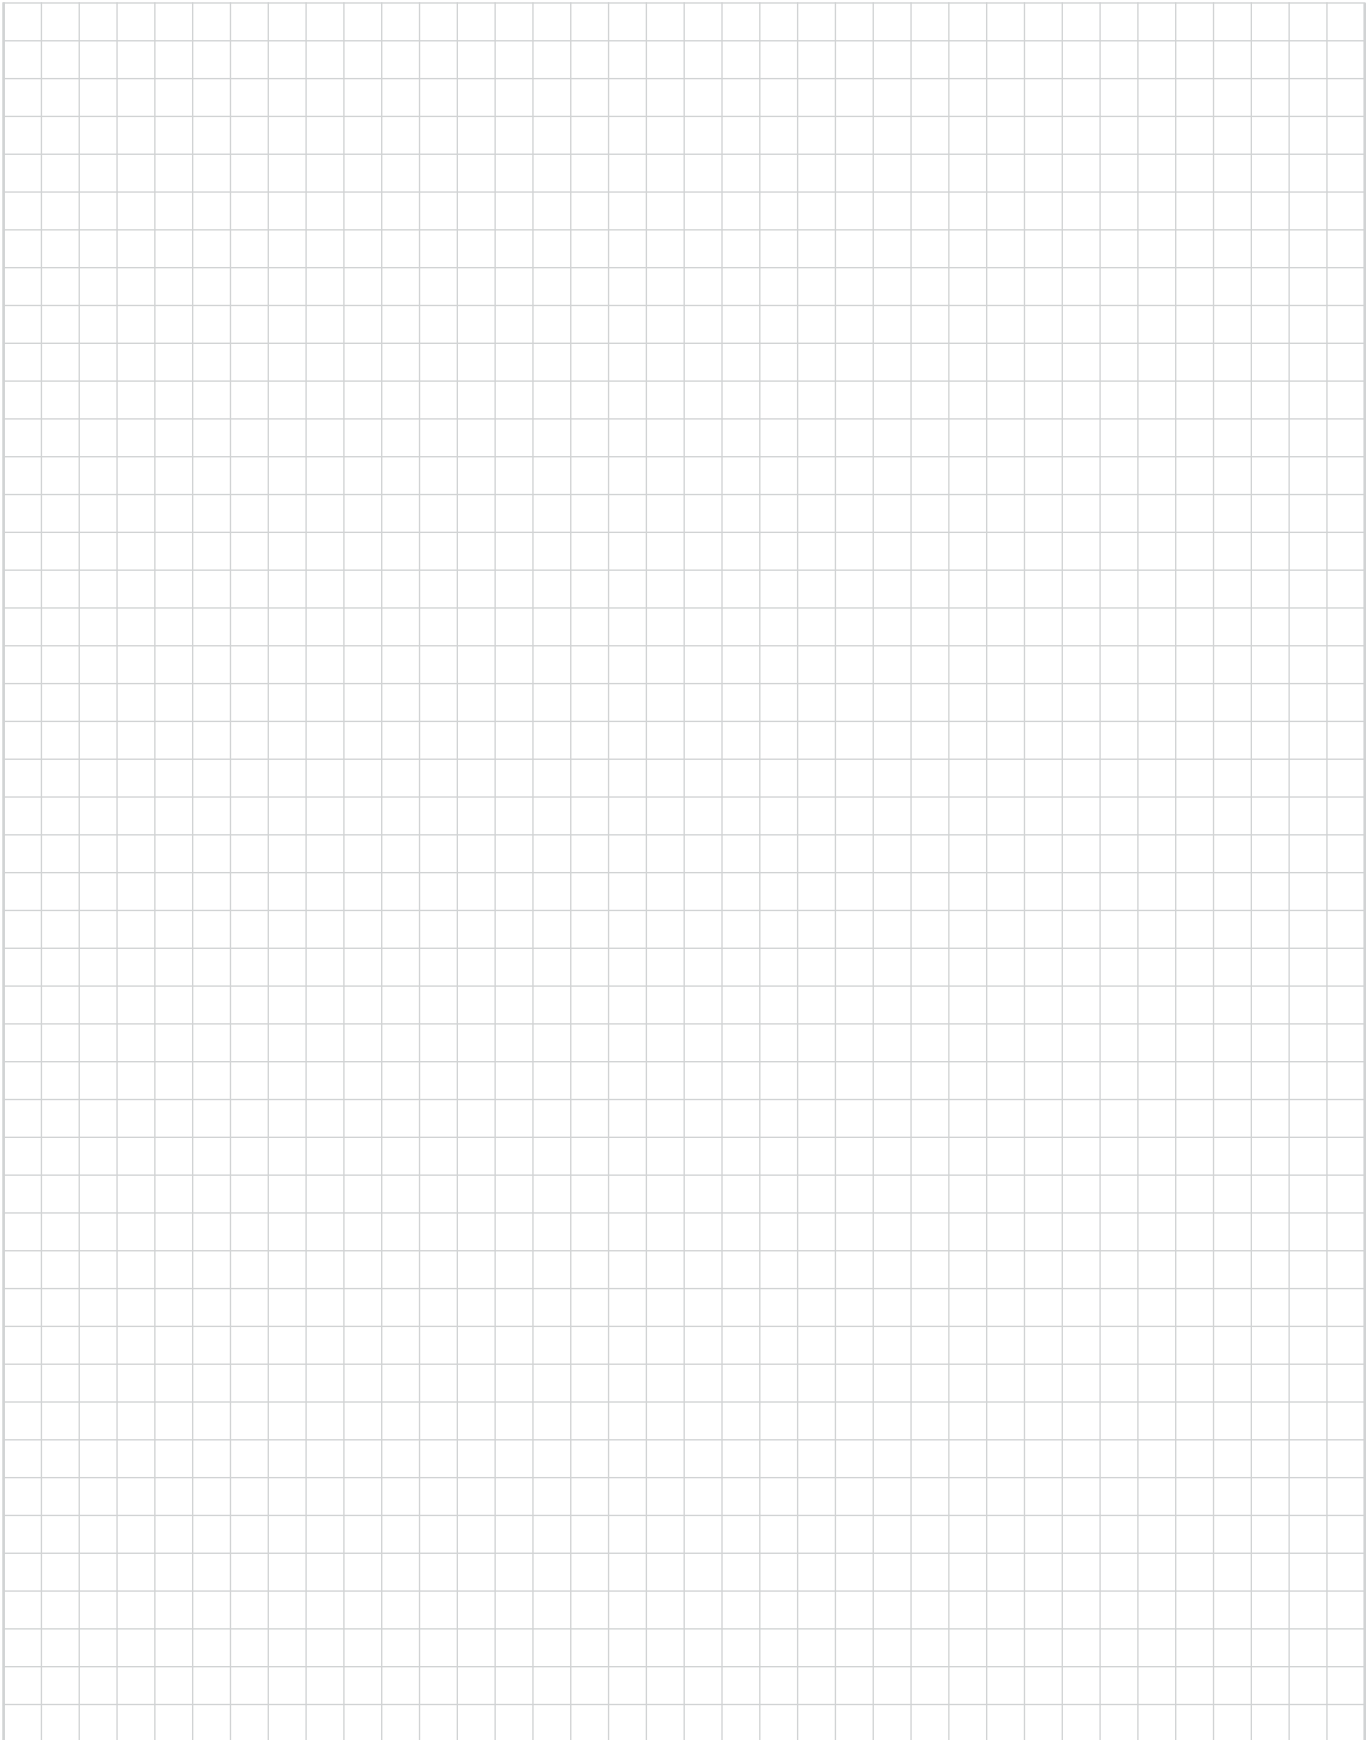



[www.bermad.com](http://www.bermad.com)

© Copyright 2008-2018 Bermad CS Ltd. All Rights Reserved. The information contained in this document is subject to change without notice. BERMAD shall not be liable for any errors contained herein.