



Waterworks

BERMAD Meters

Merging monitoring & control



SENSOR MUT1000EL

Euromag Electromagnetic Flowmeter



Euromag Sensor MUT1000EL



EUROMAG
Sensors
MODEL: MUT1000EL
PART N: EA5070
DN: 100
PN: 100
TEMP: 0°C - 150°C
ELECTRODES: INCO
LINING: PTFE
KA: 1.500
Made in Italy

The wafer electromagnetic flowmeter



DS120-2-ENG



Internal lining

The standard internal insulating lining is in PTFE for diameters from DN25 to DN100, in hard rubber for food stuff (ebonite for food) for diameters of more than DN100. On request the sensors may be supplied coated with PTFE for diameters of more than DN100. The temperature of the liquid to be measured is limited by the type of internal lining used.

Electrodes and grounding

The standard electrodes are in Hastelloy C and, therefore, guarantee a wide compatibility with the process liquids, if required they may be supplied in other materials. A grounding electrode and an empty pipe electrode are also provided to monitor conditions of partly filled pipe.

Coupling and sensor connection

MUT1000EL sensors may be coupled with any Euromag converters. In the separate version the sensor is connected to the converter by means of cables whose length depends on the liquid conductivity; the maximum length shall not exceed 100 metres (30 meters in combination with battery operated electronics).


Calibration and maximum error

MUT1000EL sensors belong to the reference Group B1 (ISO 11631). Each sensor is calibrated on an hydraulic bench equipped with a reference weighting system and SIT certified. The uncertainty of the calibration is equal to 0.2% +/- 2 mm/s. The repeatability is in the order of 0.1%.

Reference standards

The Euromag magnetic meters are marked CE and are manufactured according to the following standards:

- 2014/35/EU - EN 61010-1:2013 (LVD)
- 2014/30/EU - EN 61326-1:2013 (EMC)
- 2014/34/UE - IEC 60079 - 0, IEC 60079 - 18 (ATEX - IECEx) Separate version
- EN ISO 15609-1 and EN ISO 15614-1
- UNI EN ISO 12944-2, painting for C4 class environments (on request)
- PTFE conform to the norms WRAS, FDA, DPR 777/82 e DM 21/09/773
- Ebonite conform to the norms WRAS, FDA e DM174

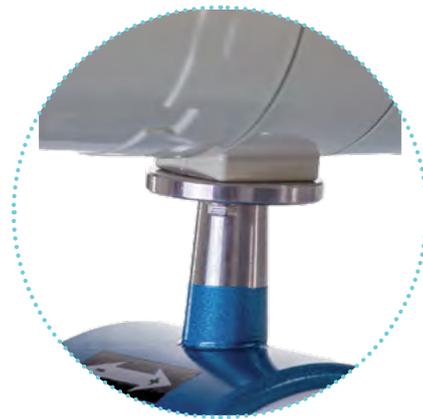



Body and connection

MUT1000EL SENSORS have the flow tube made in stainless steel AISI 304 and the structure is made in acrylic painted carbon steel. This treatment gives the sensor an excellent resistance to water, even in permanent immersion. It is equipped with a junction box to connect the cables to the converter. Its standard degree of protection is IP68, suitable for a permanent immersion in water at 1.5m. It is installed between flanges UNI 2223 from PN 16 to PN 40 or between flanges ANSI 150, 300.



Available electrodes


* Hastelloy C (standard)	* Titanium
* Hastelloy B	* Tantalum
	* Platinum

General characteristics of MUT1000EL sensors

Available diameters	[mm]	25	40	50	65	80	100	125	150	200	250	300
	["]	1"	1½"	2"	2½"	3"	4"	5"	6"	8"	10"	12"
Joins: coupling flanges	EN1092-1, ANSI 150, ANSI 300, ANSI 600, ANSI 900, DIN 2501, BS 4504, AS 2129 (TABLE D - E - F), AS 4087, ISO 7005-1, KS 10K											
Maximum pressure	40 bar for diameters < DN150						16 bar for diameters > DN200					
Internal lining and liquid temperature [1]	Internal lining						Liquid temperature					
	PTFE						Standard -40 /+130°C (up to +180° on request)					
	Ebonite						-40°C / +80°C					
Degree of protection	IP68 continuous immersion at a 1.5 m (EN 60529)											
Compatible converters	MC608 A/B/R/P/I, MC406											
Electric connections	Cable glands M20 x 1.5 + terminal block + sealing resin											



Weight of MUT1000EL sensors in the separate version without package

DN	[mm]	25	40	50	65	80	100	125	150	200	250	300
DN	["]	1"	1½"	2"	2½"	3"	4"	5"	6"	8"	10"	12"
WEIGHT	[kg]	2.1	2.5	3.0	4.5	6.5	7.5	9.5	11.5	17	21	26

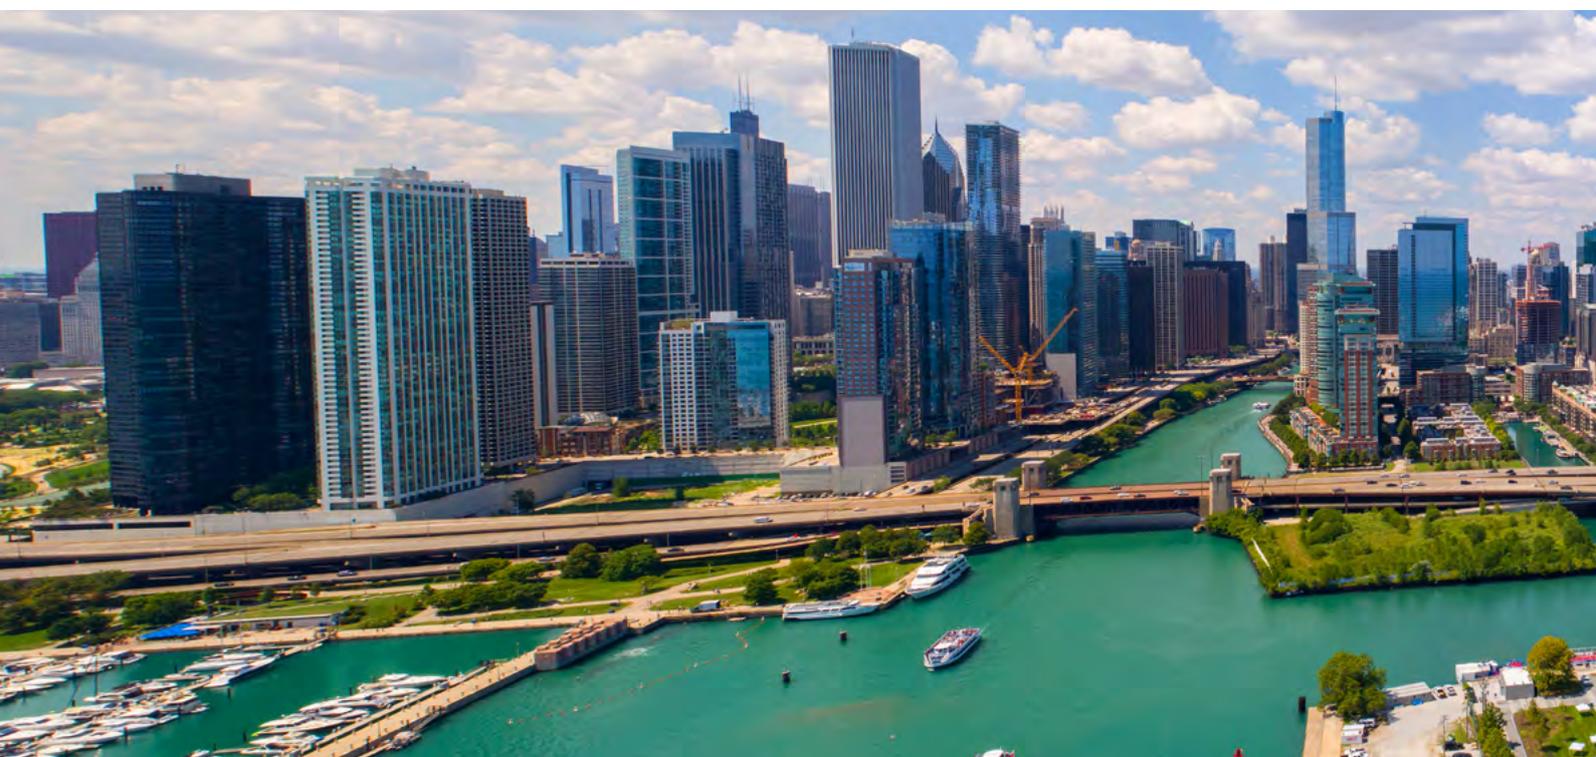


MUT1000EL

DN	L4	Di	D5	H	J
25	86	24	74	163	108
32	87	32	83	168	112
40	87	35	88	170	115
50	87	47	102	177	122
65	96	63	114	183	128
80	90	75	127	190	134
100	109	99	161	207	151
125	110	124	186	219	164
150	130	152	216	234	179
200	169	201	267	260	204
250	169	255	319	286	230
300	195	308	371	312	256

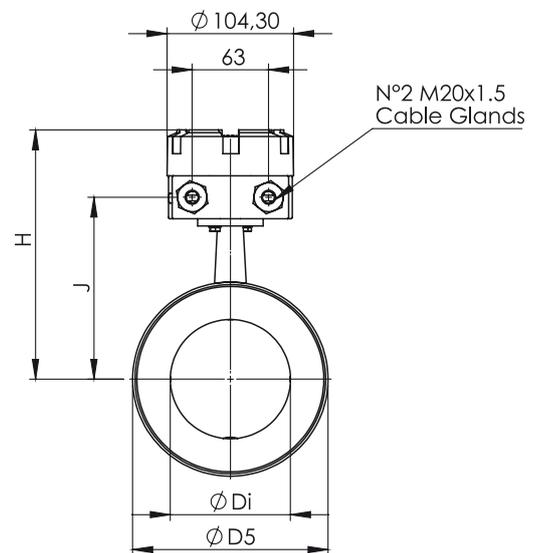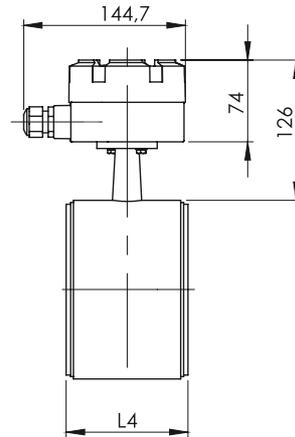


MUT1000EL - MC608A/B/R

DN	H
25	222
32	227
40	229
50	236
65	242
80	249
100	266
125	278
150	293
200	319
250	345
300	371

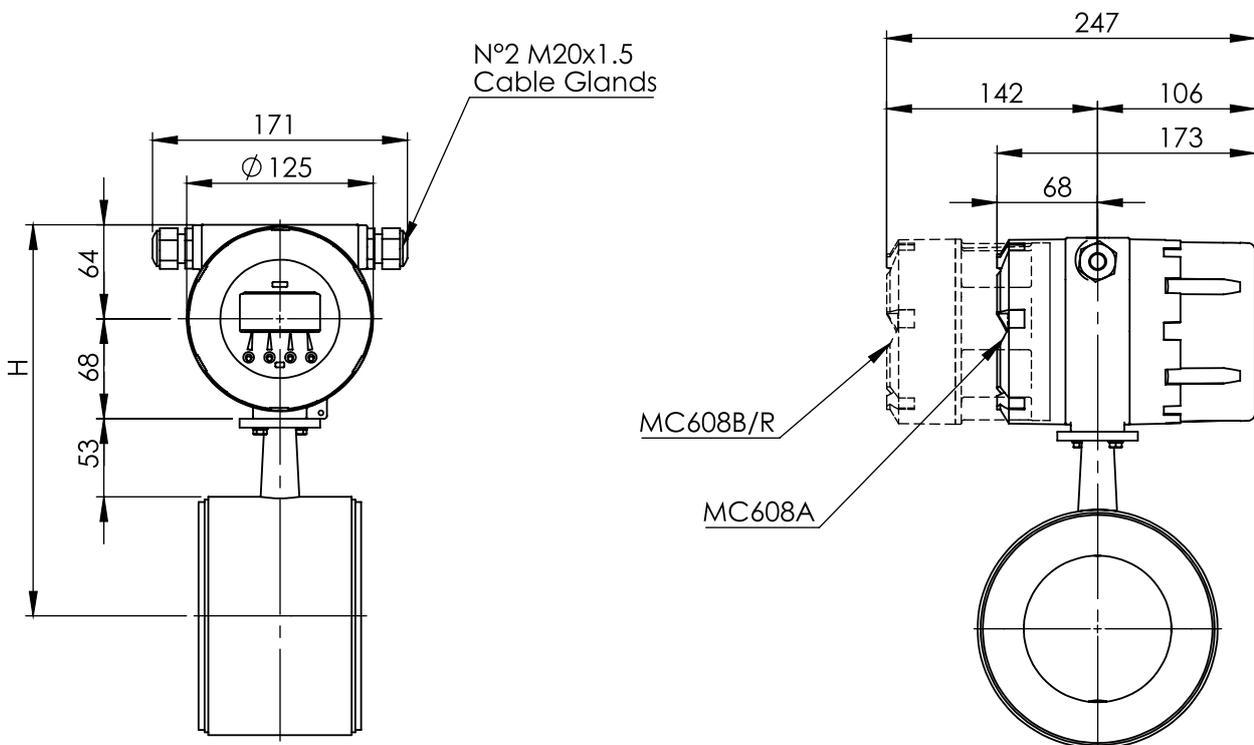


MUT1000EL - MC406 VERTICAL

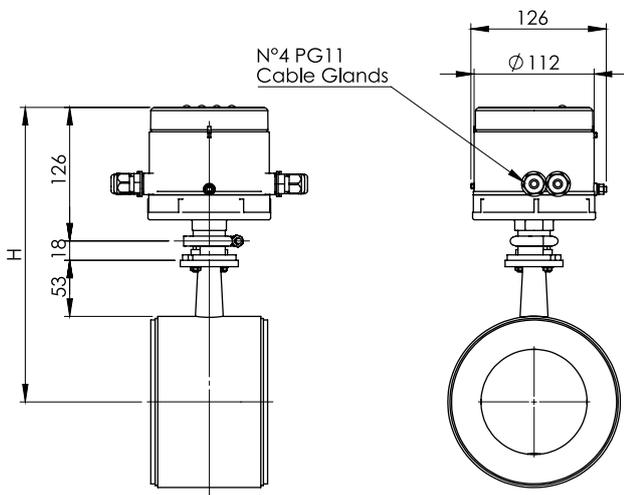



DN	H
25	234
32	239
40	241
50	248
65	254
80	261
100	278
125	290
150	305
200	331
250	357
300	383

MUT1000EL - MC406 HORIZONTAL

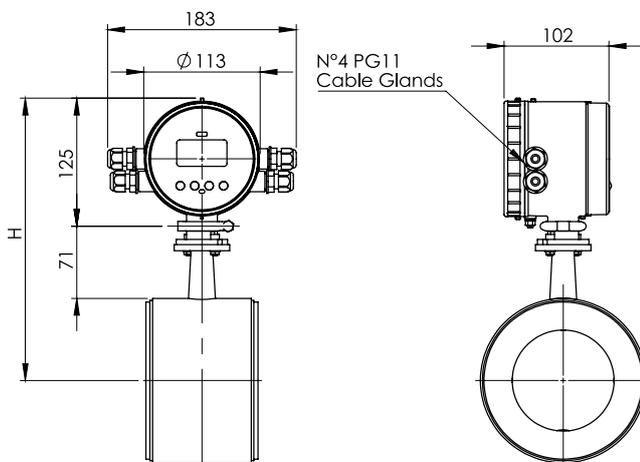

DN	H
25	233
32	238
40	240
50	247
65	253
80	260
100	277
125	289
150	304
200	330
250	356
300	382

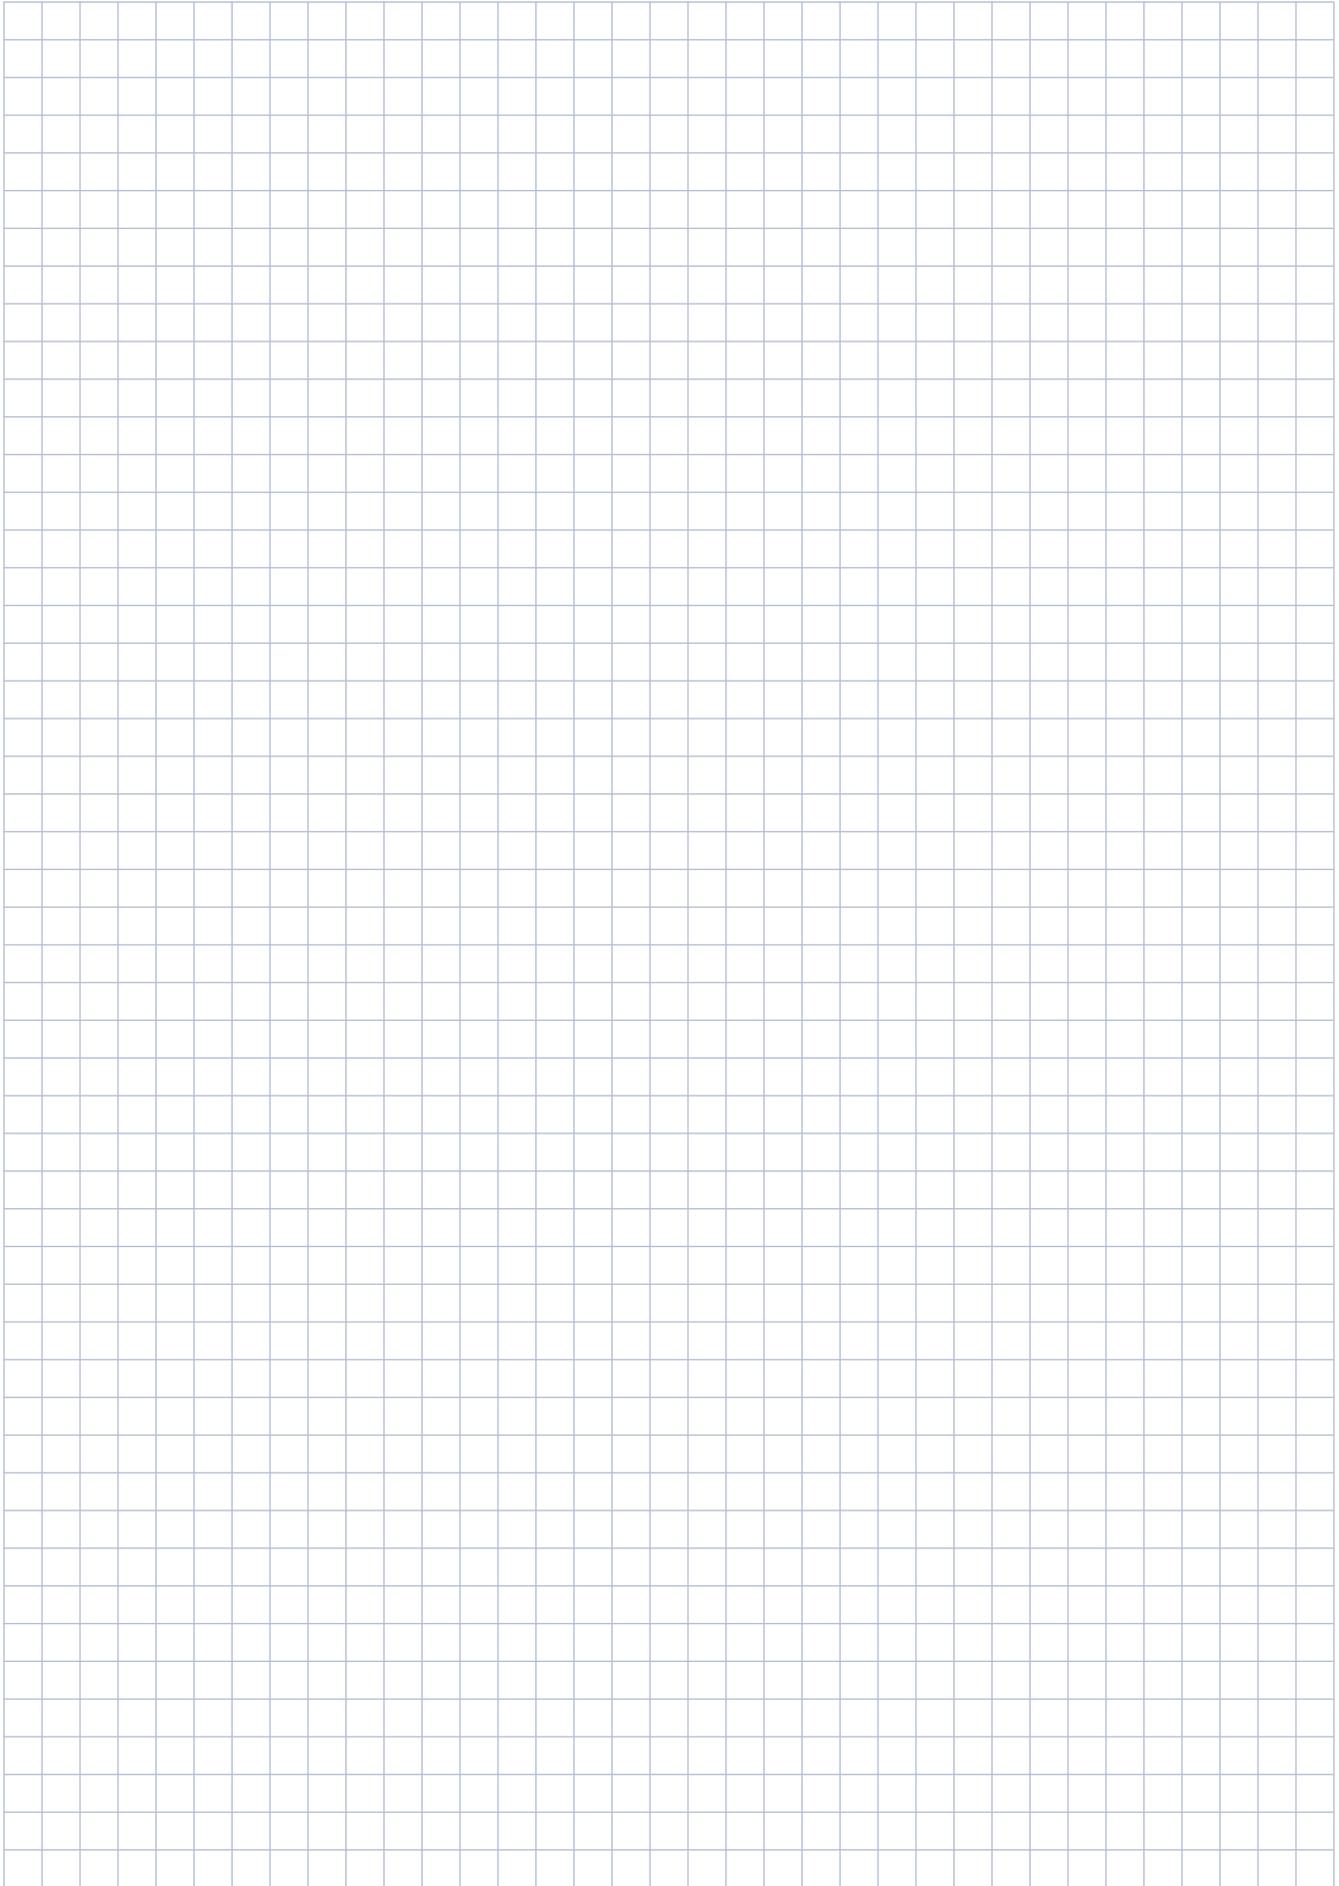

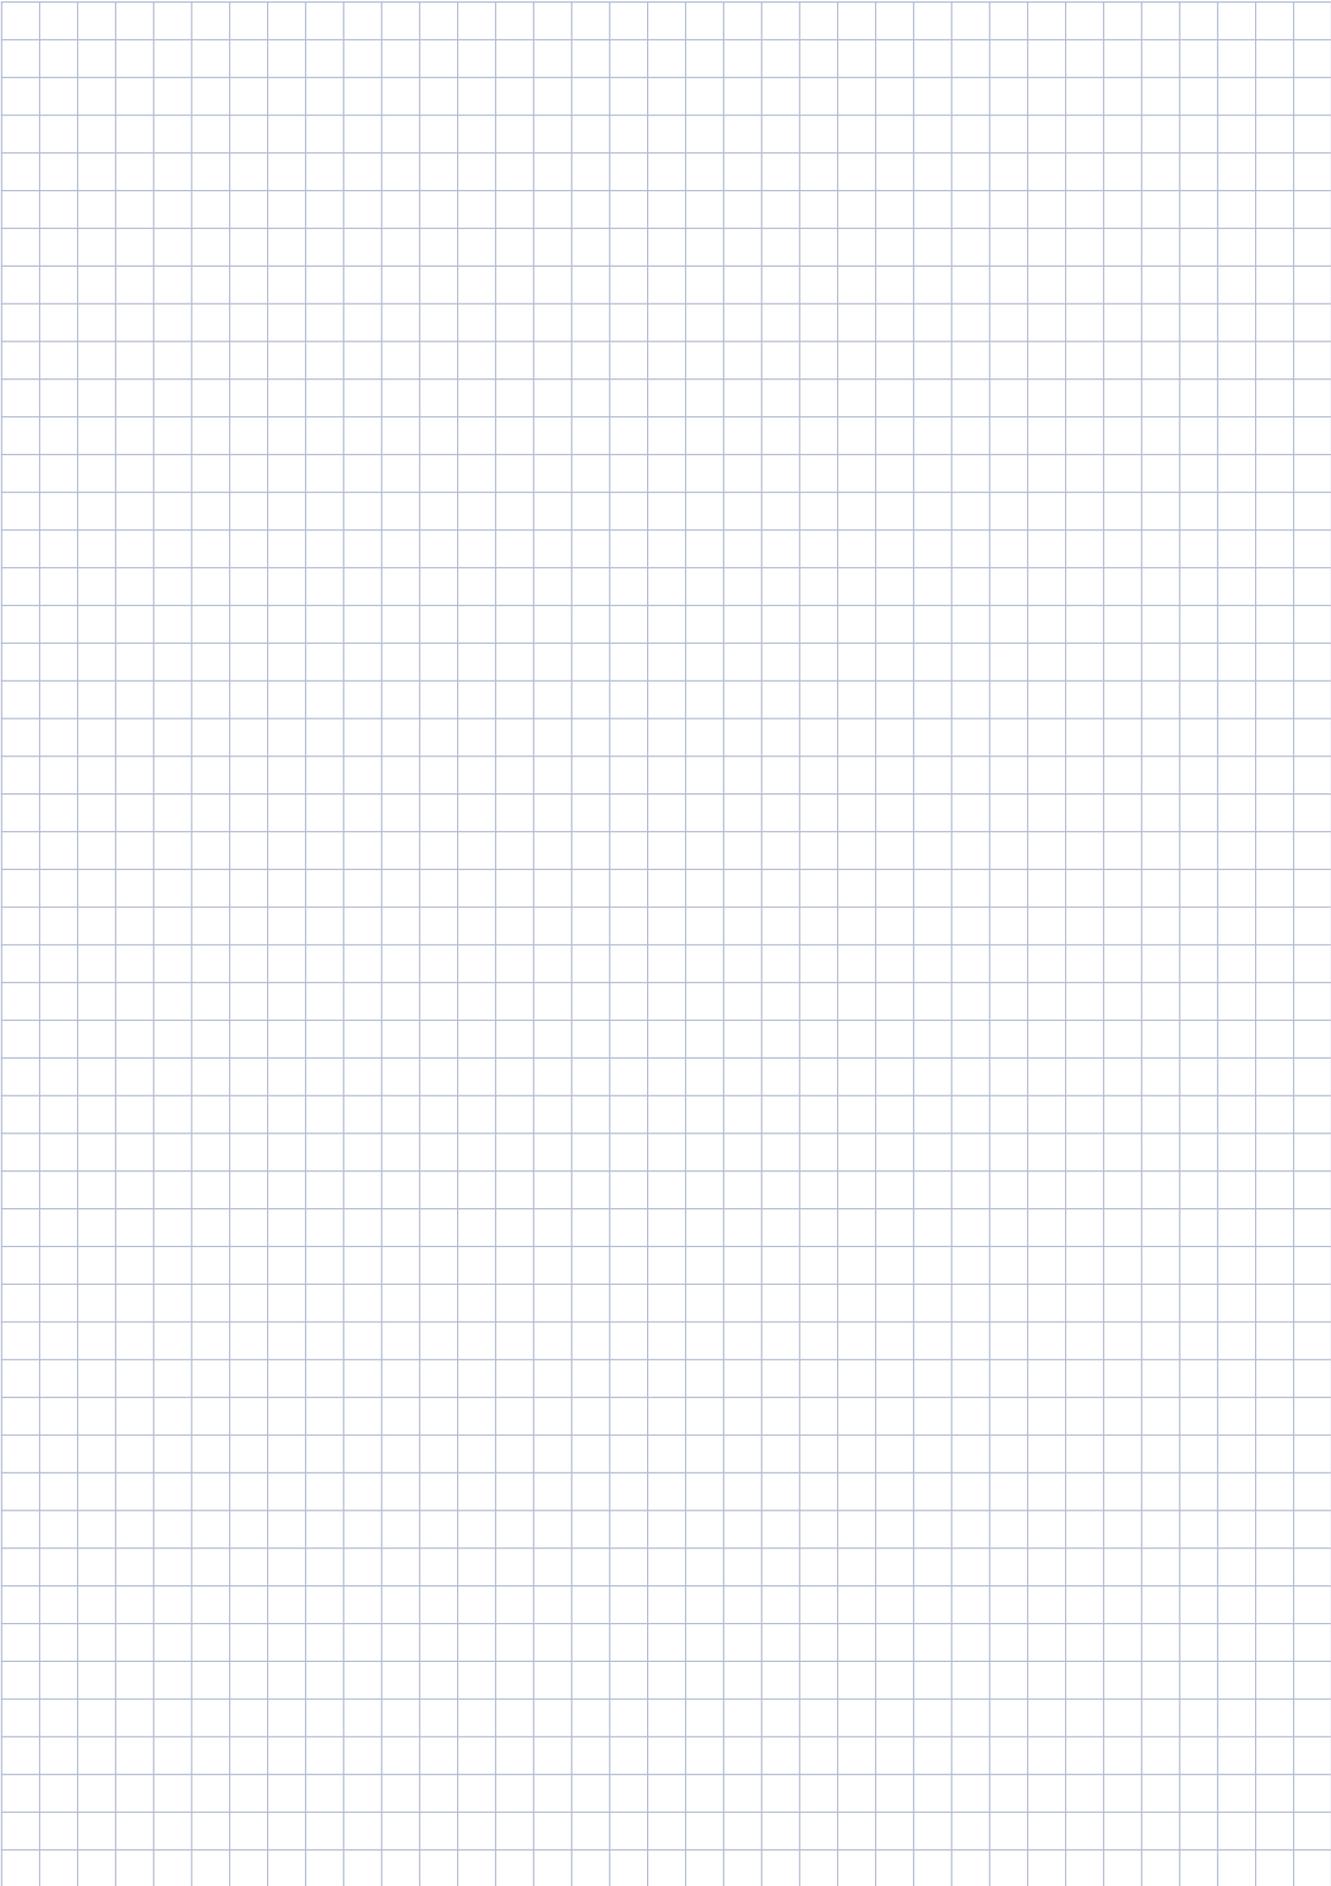

About BERMAD

BERMAD is a leading, privately-owned global company that designs, develops and manufactures tailor-made water & flow management solutions that include state-of-the-art hydraulic control valves, air valves and advanced metering solutions.

Founded in 1965, we have spent over 50 years interacting with the world's major end users,

and accumulating knowledge and experience in multiple markets and industries. Today, we are recognized as a pioneer and established world-leading provider of water & flow management solutions that give our customers the unprecedented operational efficiency, and superior quality, durability and performance they need to meet the demanding challenges of the 21st century.



ozbranding.co.il



www.bermad.com

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
© Copyright 2009-2019 BERMAD CS Ltd.

PCUWE19-MUT1000EL