

DIRECT ACTING PRESSURE RELIEF VALVE

Model BC-DPRV-#3HC-P

Spring loaded, direct acting relief valve that relieves excessive system pressure when such pressure rises above a preset value. It responds immediately, accurately, and with high repeatability to a rise in system pressure by opening fully.

This model is often used as a pilot control for various Bermad pilot operated models.



Pressure reducing system with redundancy for small pressure zones featuring BERMAD BC-DPRV-#2HC-P direct acting pressure reducing valve and BERMAD BC-DPRV-#3HC-P direct acting pressure relief valve.


Typical Application

- Relieves excess pressure downstream of dead-end PRV stations.
- Protects pipelines from high pressure.

Operation

Upstream pressure is applied to the bottom of the diaphragm through an internal sensing port. So long as upstream pressure is less than or equal to the set-point of the valve, the BERMAD BC-DPRV-#3HC-P is held closed by the force exerted by the spring on the top of diaphragm. When the pressure rises above the set-point,

the pressure relief valve opens to relieve the upstream pressure. When the pressure has fallen back below the set-point, the valve will close. Turning the adjusting screw on top of the valve allows for pressure adjustment by varying the force the spring applies to the diaphragm.



Features and Benefits

- Fulfills all requirements for Drinking Water System Components and Reduction of Lead in Drinking Water Act
- Immediate, accurate response to sudden system variations
- Drip Tight Closure
- Robust Design - Suitable for constant, intense operation
- High Quality Construction Materials
- In-Line Serviceable - Quick and easy maintenance and service
- Easy field pressure setting and calibration

Technical Data

Pressure Rating: 400 psi, PN25

End Connections: ¾" ISO-7 Rp, ½" NPT

Working Temperature: Water up to 180°F; 80°C

Materials: Body & Cover: Stainless Steel 316

Elastomers: EPDM rubber

Cartridge: Stainless Steel 316

Spring: Stainless Steel 316




Optional Materials:

Metal parts: St. St 303, Nickel Aluminum Bronze, Super Duplex, Hastelloy.

Elastomers: NBR, FPM.

Recommended flow range: 0-53 gpm; 0-12 m³/hr

Expected Relief Flow

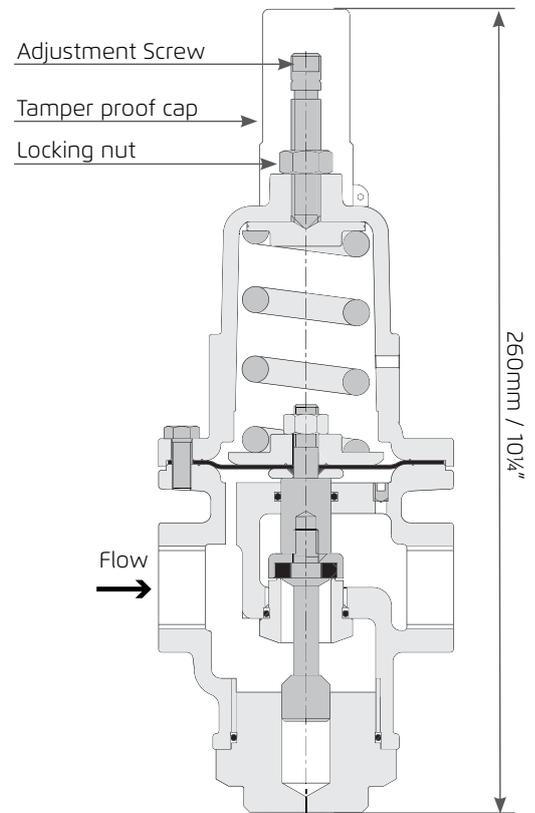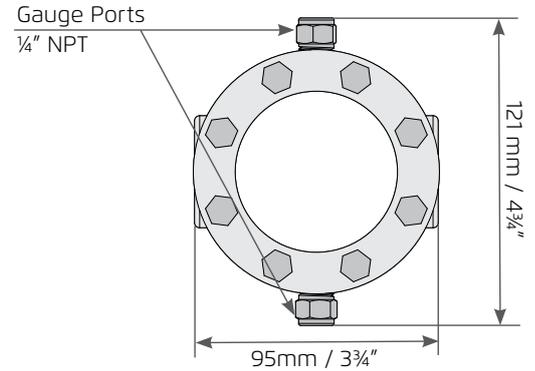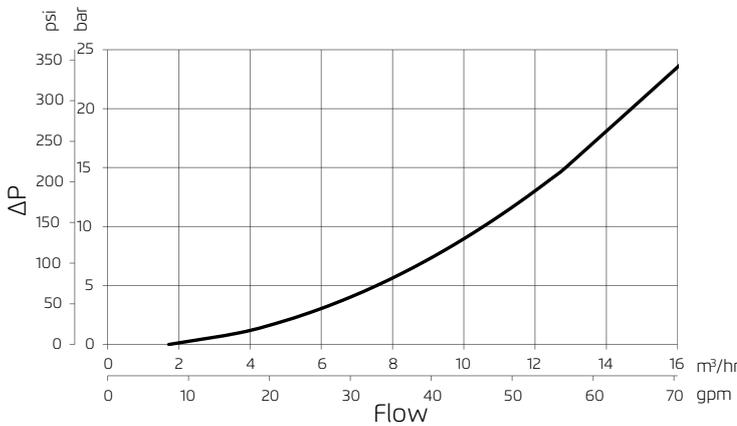

Weight: 3.4 kg / 7.5 lbs

Adjustment Range:

Model	Spring	Pressure range		Approximate increase for each clockwise turn of adjusting screw	
		bar	psi	bar	psi
#3HC-WD-16-0-N (Standard)	16	1-16	15-230	2.2	31.3
#3HC-WD-10-0-N	10	0.8-10	11-150	0.6	9.0
#3HC-WD-25-0-N	25	2-25	30-350	1.8	25.7



NSF 61/372
USA



WRAS
UK



DVGW
Germany



ACS
France



GOST
Russia



BELGAQUA
Belgium



AS 5081
Australia



Watermark
Australia



PZH
Poland



Bulgarcontrola
Bulgaria



SVGW
Switzerland



ISO 9001 - 2008