




## LEVEL CONTROL VALVE

### with Bi-Level Electric Float

#### Model 750-65

Hydraulically operated, Solenoid controlled valve that open fully or shut off by electric signals, the Bi-Level Electric float sends the valve a signal to open at a pre-set low level and a signal to close at a pre-set high water level. This valve can be activated also by any type of level sensor.

BERMAD 700 series valves are hydraulic, oblique pattern, globe valves with double chamber unitized actuator, that can be disassembled from the body as a separate integral unit. The valves hydrodynamic body is designed for unobstructed flow path and provides excellent and highly effective modulation capacity for high differential pressure applications.

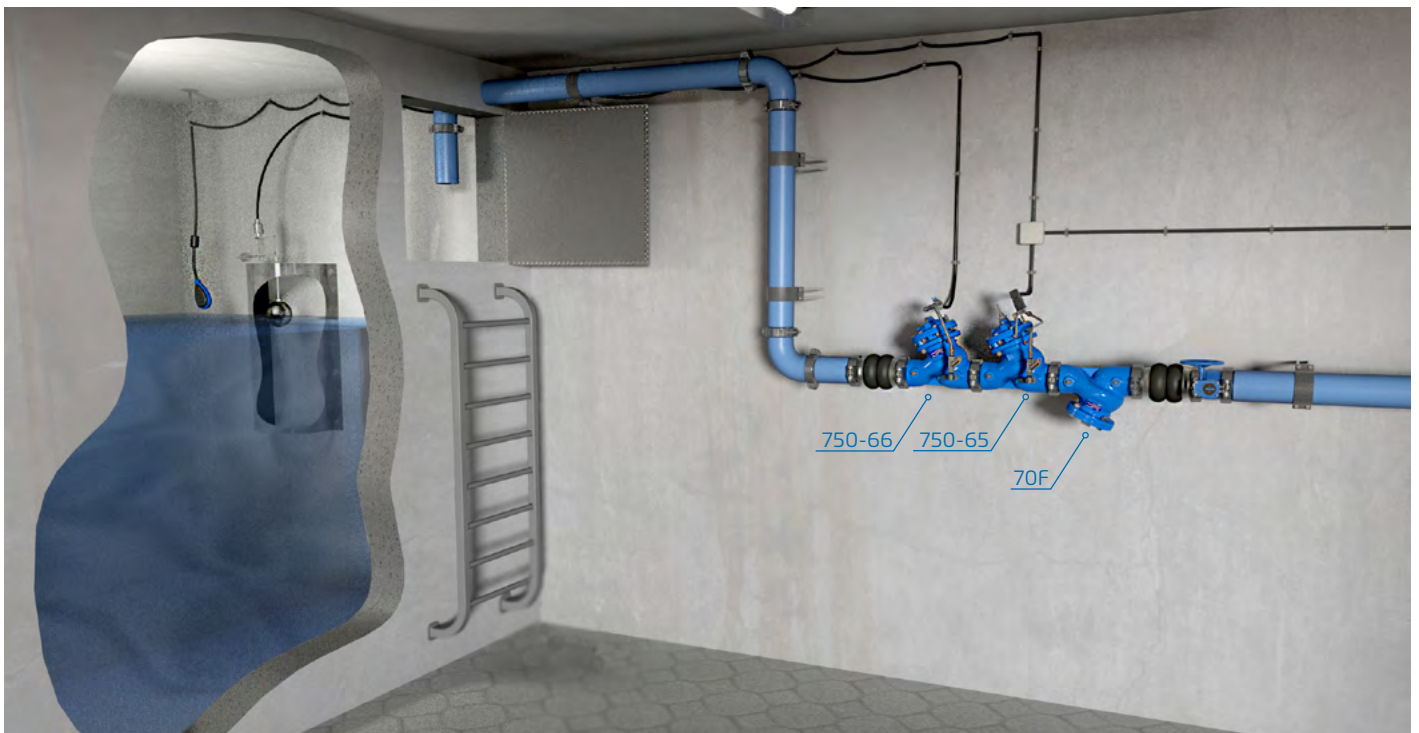

Water Reservoir Level Control System, featuring the 750-65 as an electric controlled backup valve to an hydraulically controlled level control valve. In case of main level control valve malfunction the Electric Float will sense the rise in water level and signal the 750-

65 to shut off, until water level decrease to a pre-set level. When used as a "back up" valve a limit switch should be added in order to signal malfunction of the main level control valve.

### Typical Application

- Primary reservoir level control valve (Typically Normally Closed version) at reservoir inlet
- Backup and safety reservoir level control, installed in tandem with a hydraulic float level control valve (typically Normally Open version) at reservoir inlet
- Maintaining emergency minimal reservoir level (Typically Normally Open, low pressure, double chamber activated version) reservoir outlet



## Features and Benefits

- High Quality Construction Materials - Reliable, resilient and long lasting operation
- Robust Design - Suitable for constant, intense operation
- In-Line Serviceable - Quick and easy maintenance and service
- Line Pressure Driven - Independent operation, no external power needed
- Unitized Actuator Assembly - Minimal downtime
- Double chambered electrical control provides power opening under extremely low pressure conditions by using the lower chamber, allowing smooth and quiet water flow
- System failure indication - optional indication to maintenance personnel of abnormal operation conditions requiring immediate attention

## Technical Data

### General:

#### End connections:

Grooved / Flanged / Threaded

**Pressure Rating:** 400 psi; PN25

**Valve Pattern:** Y (Oblique) / Angle

#### Working Temperature:

Cold Water up to 140°F; 60°C

**Optional Higher Temperatures:**

Available on request

### Main Valve Materials:

#### Body, Cover and Partition:

**Standard:** Ductile Iron

**Optional:** Stainless Steel 316

**Seat:** Stainless Steel

#### Internals:

Stainless Steel, Tin Bronze & Coated Steel, POM

**Diaphragm:** Fabric-reinforced synthetic rubber

**Seals:** Synthetic rubber

**Coating:** Blue Fusion bonded epoxy

### Control Trim Materials:

#### Control Accessories:

Stainless Steel / Bronze & Brass

**Tubing:** Stainless Steel / Copper

**Fittings:** Stainless Steel / Brass

#### Solenoid:

**Body:** Stainless Steel / Brass

**Elastomers:** Synthetic Rubber

**Enclosure:** Molded Epoxy

\* For other optional material consult BERMAD.

\*\* Materials may vary according to sanitary standard.

## How To Order

Please Specify the requested valve in the following sequence:

**BC - 2" - 750-65 - 00 - P2 - Y - C** - **VI** - **EB - 4AC - NN** - **N**

Segment	Model	End Connection	Standard	Code	Coating	Code	Additional Attributes (Multiple Options Permitted)	Code
BC	750-65	Up to 250 psi / PN16	ANSI C606	VI	Epoxy Blue	EB	V-Port Throttling Plug	V
Size	Series	Grooved	BS 1387	VB	Epoxy Blue with UV Protection	EV	Valve Position Indicator	I
1½" DN40	Classic	Flanged (Other standards available)	ISO-16	16	Uncoated	UC	Limit Switch	S
2" <b>DN50</b>	Sigma EN	Threaded	ABNT16	B6			Flow Stem	M
2½" DN65	Sigma ES		ANSI 150	A5			Double Chamber (Active)	B
3" DN80			AST-*	S*			3-Way Control	X
4" DN100	Potable water Compatibility		BSPT	BP	Solenoid Voltage	Code	St.St. 316 All Control Accessories	N
6" DN150	Approved		NPT	NP	No Solenoid	000	Pressure Gauge	6
8" DN200	Unregistered	250-400 psi / PN25			24VAC/50Hz	4A	Orifice Assembly	U
10" DN250		Grooved	ANSI C606	V2	24VAC/60Hz	46	Large Control Filter	F
12" DN300	Orientation	Flanged (Other standards available)	BS 1387	VD	24VDC	4D	In Line Filter	C
14" DN350	Y Oblique	Threaded	ISO-25	25	220VAC/50-60Hz	2A	Manual Selector	Z
16" DN400	Angle		ABNT25	B2	220VDC	2D		
18" DN450			ANSI 300	A3	110VAC/50-60Hz	5A		
20" DN500	Construction Material		BSPT	PH	110VDC	5D		
24" DN600	Ductile Iron		NPT	NH	12VDC	1D		
	Stainless Steel 316				Main Valve Position (When Solenoid De-energized)	Code	Tubings & Fittings	Code
					Normally Closed	C	Copper Tubing & Brass Fittings	CB
					Normally Open	O	Stainless Tubing & Fittings	NN
					Last Position	P		
					Latch Solenoid	S		



NSF 61/372 USA



Bulgarkontrola Bulgaria



ACS France



GOST Russia



PZH Poland

Manufactured and Tested According to AWWA C530-12 Requirements