



LEVEL CONTROL VALVE


with Bi-Level Vertical Float

Model 750-66

Hydraulically operated control valve that controls reservoir filling and reservoir level.

Reservoir filling is in response to a hydraulically controlled Bi-level vertical float that opens at a pre-set reservoir low level and shuts off at a pre-set high level, regardless of valve differential pressure.

BERMAD 700 series valves are hydraulic, oblique pattern, globe valves with double chamber unitized actuator, that can be disassembled from the body as a separate integral unit. The valves hydrodynamic body is designed for unobstructed flow path and provides excellent and highly effective modulation capacity for high differential pressure applications.

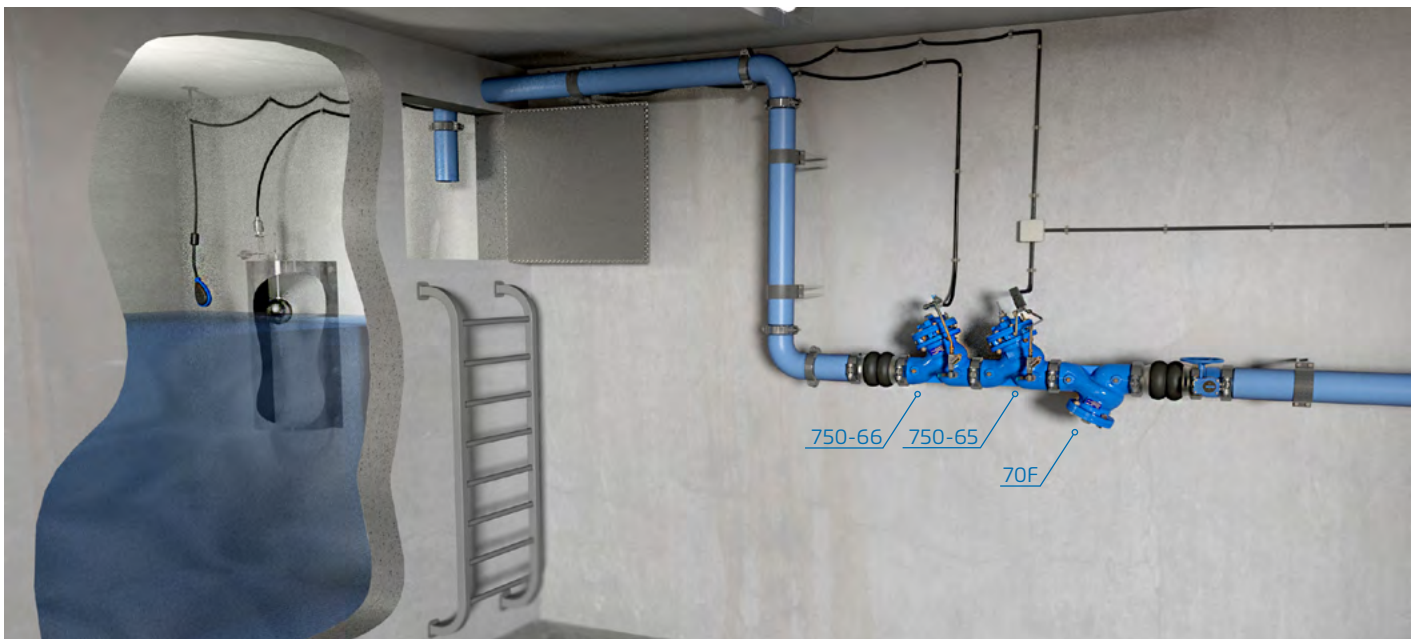

Water Reservoir Level Control System, featuring the 750-66 that control high and low water level in the reservoir. As backup, another level control valve is stationed upstream and calibrated to a slightly

higher water level. The backup valve can be specified to operated hydraulically (another 750-66) or electrically (750-65).

Typical Application

- Level control of water reservoirs in buildings; basement and roof-top reservoirs, pressure breaking tanks, emergency water storage operating under tough conditions and intensive use.
- Priority and backup management of reservoirs
- Out of tank installation; level control in limited access or remote sites



Features and Benefits

- High Quality Construction Materials - Reliable, resilient and long lasting operation
- Robust Design - Suitable for constant, intense operation
- In-Line Serviceable - Quick and easy maintenance and service
- Line Pressure Driven - Independent operation, no external power needed
- Unitized Actuator Assembly - Minimal downtime
- Accurate and reliable level control; prevents reservoir overflow and cut-offs
- Double chamber actuator, fully operational under very low pressure conditions including optional full opening & closing action under zero line pressure; provides smooth, immediate valve response with no hammer effect
- 4-way float control provides powered opening in extremely low pressure conditions allowing smooth and quiet water flow

Technical Data

General:

End connections:

Grooved / Flanged / Threaded

Pressure Rating: 400 psi; PN25

Valve Pattern: Y (Oblique) / Angle

Working Temperature:

Cold Water up to 140°F; 60°C

Optional Higher Temperatures:

Available on request

Main Valve Materials:

Body, Cover and Partition:

Standard: Ductile Iron

Optional: Stainless Steel 316

Seat: Stainless Steel

Internals:

Stainless Steel, Tin Bronze & Coated Steel, POM

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Blue Fusion bonded epoxy

Control Trim Materials:

Control Accessories:

Stainless Steel / Bronze & Brass

Tubing: Stainless Steel / Copper

Fittings: Stainless Steel / Brass

* For other optional material consult BERMAD.

** Materials may vary according to sanitary standard.

How To Order

Please Specify the requested valve in the following sequence:

BC - 2" - 750-66 - 00 - P2 - Y - C - VI - EB - 000 - NN - VN

Segment	Model	End Connection	Standard	Code	Coating	Code	Additional Attributes (Multiple Options Permitted)	Code
BC	750-66	Up to 250 psi / PN16	ANSI C606	VI	Epoxy Blue	EB	V-Port Throttling Plug	V
Size	Series	Grooved	BS 1387	VB	Epoxy Blue with UV Protection	EV	Valve Position Indicator	I
1½" DN40	Classic	Flanged (Other standards available)	ISO-16	16	Uncoated	UC	Limit Switch	S
2" DN50	Sigma EN	Threaded	ABNT16	B6			Flow Stem	M
2½" DN65	Sigma ES		ANSI 150	A5			Double Chamber (Active)	B
3" DN80			AST-*	S*			3-Way Control	X
4" DN100	Potable water Compatibility		BSPT	BP	Solenoid Voltage		St.St. 316 All Control Accessories	N
6" DN150	Code		NPT	NP	No Solenoid	000	Pressure Gauge	6
8" DN200	Approved				24VAC/50Hz	4A	Orifice Assembly	U
10" DN250	Unregistered				24VAC/60Hz	46	Large Control Filter	F
12" DN300					24VDC	4D	In Line Filter	C
14" DN350	Orientation				220VAC/50-60Hz	2A	Manual Selector	Z
16" DN400	Code				220VDC	2D		
18" DN450	Y Oblique				110VAC/50-60Hz	5A		
20" DN500	Angle				110VDC	5D		
24" DN600					12VDC	1D		
	Construction Material				Main Valve Position (When Solenoid De-energized)		Tubings & Fittings	
	Ductile Iron				Normally Closed	C	Copper Tubing & Brass Fittings	CB
	Stainless Steel 316				Normally Open	O	Stainless Tubing & Fittings	NN
					Last Position	P		
					Latch Solenoid	S		



NSF 61/372 USA



Bulgarkontrola Bulgaria



ACS France



GOST Russia



PZH Poland



Watermark Australia



AS 5081 Australia

Manufactured and Tested According to AWWA C530-12 Requirements

The information contained herein may be changed by Bermad without notice. Bermad shall not be held liable for any errors.

© Copyright 2009-2020 Bermad CS Ltd. Mar 2020