

Pressure Reducing Hydrometer, Magnetic Drive

with Hydraulic Control
for Drip-Tape Applications, Metal Accessories


IR-920-M0-50-bRZ

The BERMAD Model IR-920-M0-50-bRZ integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. Serving as Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD Hydrometer accurately reduces higher upstream pressure to very low and stable preset downstream pressure. It either opens or shuts in response to remote pressure commands.



Features and Benefits

- Integrated "All-in-One" Control Valve
 - Saves space, cost and maintenance
- Line Pressure Driven Hydraulically Controlled On/Off
 - Protects downstream systems
- Pressure Reducing Servo Pilot Controlled
 - Dynamic integrated needle valve
 - Settable to 0.5 bar; 7 psi
 - Very low hysteresis
- Metal Control Accessories
 - Damage resistant
 - High pressure rating
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch and Opto pulse-generating modes
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device

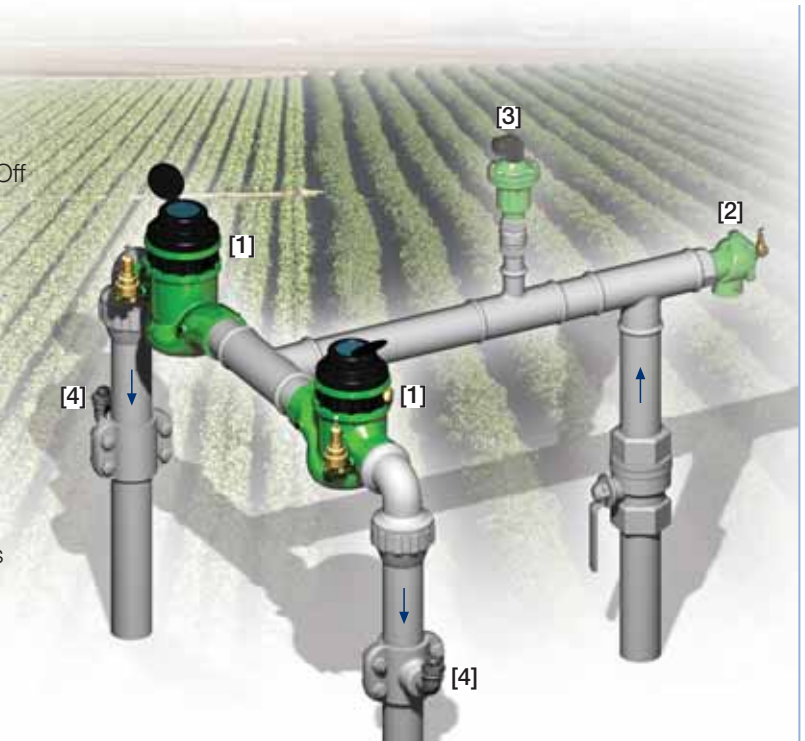

Typical Applications

- Computerized Irrigation Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Drip-Tape Systems
- Low Set Pressure Applications
- Distribution Centers


[1] BERMAD Model IR-920-M0-50-bRZ opens upon pressure drop command, establishes reduced pressure zone, and measures flow.

[2] BERMAD Relief Valve Model IR-43Q-R

[3] BERMAD Air Valve Model ARC-A-P-I

[4] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-920-MO-50-bRZ

For full technical details, refer to Engineering Section.


900 Series

Pressure Reducing
Drip-Tape

Technical Specifications

Dimensions and Weights

Size	DN Inch	40-T 1 1/2-T	50-T 2-T	50A-T 2A-T	80R-T 3R-T	80R-F 4R-F	80-F 3-F	80A-F 3A-F	100-F 4-F	100A-F 4A-F
Lg	mm	250	250	N.A.	250	310	300	N.A.	350	N.A.
	inch	9.8	9.8	N.A.	9.8	12.2	11.8	N.A.	13.8	N.A.
La	mm	N.A.	N.A.	120	N.A.	N.A.	N.A.	150	N.A.	180
	inch	N.A.	N.A.	4.7	N.A.	N.A.	N.A.	5.9	N.A.	7.1
H	mm	270	277	300	277	298	382	402	447	481
	inch	10.6	10.9	11.8	10.9	11.7	15.0	15.8	17.6	18.9
C	mm	210	210	210	210	225	285	285	365	365
	inch	9	9	9	9	9	11	11	15	15
h	mm	95	95	125	79	100	123	196	137	225
	inch	3.7	3.7	4.9	3.1	3.9	4.8	7.7	5.4	8.9
M*	mm	67	77	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
	inch	2.6	3.0	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Weight	Kg	6.8	8.8	8.1	7.3	16	26.0	25.8	37.0	36.1
	lb.	15	19.4	17.4	16.1	35.3	57.3	56.2	81.6	78.9

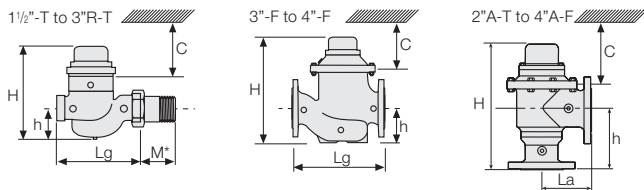

Accuracy & Flow Data

Size	Accuracy	DN inch	40 1 1/2	50 2	80R 3R	80 3	100 4
ISO 4064-1 Class			A	A		B	B
Q min (Minimum flow)	5%	m ³ gpm	0.8 3.5	0.8 3.5	1.2 5.3	1.2 5.2	1.8 7.9
Qn, ISO 4064-1 (Nominal flow)	2%	m ³ gpm	15 66	15 66	17 75	40 176	60 264
Qper=Q3 (Permanent flow)	2%	m ³ gpm	25 110	40 176	40 176	100 440	160 704

Pulse Option

Size	One pulse per	Liter ; Gallon			
		1; 0.1	10; 1	100; 10	1000; 100
1 1/2-4"; DN50-100		■	▲	▲	▲

▲ R.S. = Reed-Switch ■ O.E. = Opto-Electric
Two parallel pulses are transmitted. Other pulse rates are available on request.

Technical Data

Pressure Rating: 16 bar; 232 psi

Minimum Operating Pressure: 0.5 bar; 7 psi

For lower pressure requirements, consult factory

Setting Range: 0.5-1.7 bar; 7-25 psi


Setting ranges vary according to specific pilot spring. Please consult factory.

How to Order


Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	1 1/2-4"	920	MO	50	G	I	BP	PG	-	PP	WAT	R12	bRZ
<p>Other sizes available on request.</p> <p>Globe Angle 90° 120° (2 1/2" & 4" only)</p> <p>BSP (1 1/2, 2 & 3"R only) BP NPT (1 1/2, 2 & 3"R only) NP ISO-16 16 ISO-10 10 ISO-14 (ISO-10/4 Holes) 14 ANSI-125 A1 JIS-10 J1 BST-D BD</p> <p>Plastic Tubing & Fittings PP Plastic Tubing & Brass Fittings PB</p> <p>R.S. 10 Lit R01 R.S. 1 Gal RG3 R.S. 100 Lit R02 R.S. 10 Gal RG4 R.S. 1 m³ R03 R.S. 100 Gal RG5 R.S. 100 Lit+10 Lit R12 R.S. 10+1 Gal G34 R.S. 1 m3+1100 Lit R23 R.S. 100+10 Gal G45 O.E. 1 Lit P01 O.E. 0.1 Gal PG2 O.E. 10 Lit P10 O.E. 1 Gal PG3 O.E.+R.S. 1+100 Lit PQ1 O.E.+R.S. 0.1+10 Gal P4G O.E.+R.S. 10 Lit+1 m³ P13 O.E.+R.S. 1+100 Gal P5G R.S. No Pulse RNP R.S. No Pulse Gal RNG</p> <p>Servo b Metal Control Accessories R Manual Selector Z Homologation Approved L Other attributes available on request</p> <p>R.S. = Reed-Switch O.E. = Opto-Electric</p>													

Flow Chart

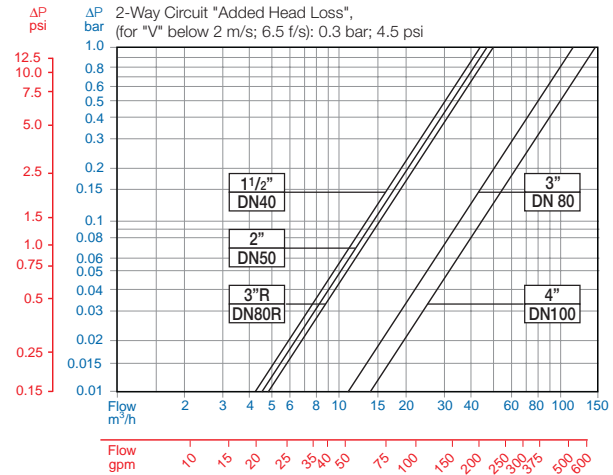

Operation

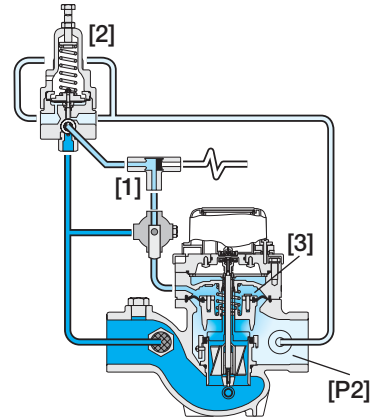

The Shuttle Valve [1] hydraulically connects the Pressure Reducing Servo Pilot (PRSP) [2] to the Hydrometer Control Chamber [3]. The PRSP commands the Hydrometer to throttle closed, preventing downstream pressure [P2] from rising above setting. Upon pressure rise command, the shuttle valve automatically switches, allowing pressurization of the control chamber, and thereby causing the Hydrometer to shut. The Manual Selector [4] enables manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD.

PC9AEM0-20-50bRZ 05