

Pressure Sustaining Hydrometer

Magnetic Drive

IR-930-MO-KXZ

The BERMAD Model IR-930-MO-KXZ integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. Serving as Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD Hydrometer sustains minimum preset upstream (back) pressure and opens fully when line pressure is in excess of setting.



Features and Benefits

- Integrated "All-in-One" Control Valve
 - Saves space, cost and maintenance
- Hydraulic Pressure Control
 - Line pressure driven
 - Prioritizes pressure zones
 - Controls system fill-up
 - Opens fully upon line pressure rise
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch and Opto pulse-generating modes
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service




Typical Applications

- Computerized Irrigation Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Systems Subject to Varying Supply Pressure
- Infield Filters Backwash Pressure Sustaining

- [1] BERMAD Model IR-930-MO-KXZ sustains supply system pressure, prevents system emptying and measures flow.
- [2] BERMAD Relief Valve Model IR-43Q-R
- [3] BERMAD Air Valve Model ARC-A-P-I
- [4] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-930-MO-KXZ

For full technical details, refer to Engineering Section.


900 Series

Pressure Sustaining

Technical Specifications

Dimensions and Weights

Size	DN Inch	40-T 1 1/2-T	50-T 2-T	50A-T 2A-T	80R-T 3R-T	80R-F 4R-F	80-F 3-F	80A-F 3A-F	100-F 4-F	100A-F 4A-F
Lg	mm	250	250	N.A.	250	310	300	N.A.	350	N.A.
	inch	9.8	9.8	N.A.	9.8	12.2	11.8	N.A.	13.8	N.A.
La	mm	N.A.	N.A.	120	N.A.	N.A.	N.A.	150	N.A.	180
	inch	N.A.	N.A.	4.7	N.A.	N.A.	N.A.	5.9	N.A.	7.1
H	mm	270	277	300	277	298	382	402	447	481
	inch	10.6	10.9	11.8	10.9	11.7	15.0	15.8	17.6	18.9
C	mm	210	210	210	210	225	285	285	365	365
	inch	9	9	9	9	9	11	11	15	15
h	mm	95	95	125	79	100	123	196	137	225
	inch	3.7	3.7	4.9	3.1	3.9	4.8	7.7	5.4	8.9
M*	mm	67	77	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
	inch	2.6	3.0	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Weight	Kg	6.8	8.8	8.1	7.3	16	26.0	25.8	37.0	36.1
	lb.	15	19.4	17.4	16.1	35.3	57.3	56.2	81.6	78.9

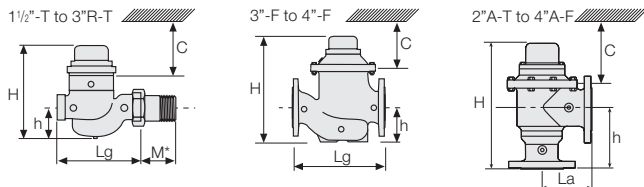

Accuracy & Flow Data

Size	Accuracy	DN inch	40 1 1/2	50 2	80R 3R	80 3	100 4
ISO 4064-1 Class			A	A		B	B
Q min (Minimum flow)	5%	m ³	0.8	0.8	1.2	1.2	1.8
		gpm	3.5	3.5	5.3	5.3	7.9
Qn, ISO 4064-1 (Nominal flow)	2%	m ³	15	15	17	40	60
		gpm	66	66	75	176	264
Qper-Q3 (Permanent flow)	2%	m ³	25	40	40	100	160
		gpm	110	176	176	440	704

Pulse Option

Size	One pulse per	Liter ; Gallon			
		1; 0.1	10; 1	100; 10	1000; 100
1 1/2-4"; DN50-100		■	▲	▲	▲

▲ R.S. = Reed-Switch ■ O.E. = Opto-Electric
Two parallel pulses are transmitted. other pulse rates are available on request.

Technical Data

Pressure Rating: 10 bar; 145 psi

Minimum Operating Pressure: 0.5 bar; 7 psi

For lower pressure requirements, consult factory

Setting Range: 1-7 bar; 15-100 psi


Setting ranges vary according to specific pilot spring. Please consult factory.

How to Order


Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern Construction	Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	1 1/2-4"	930	MO	00	G	I	BP	PG	-	PP	WAT	R12	KXZ
<p>Other sizes available on request.</p> <p>Globe G Angle 90° A 120° (2 1/2" & 4" only) H</p> <p>BSP (1 1/2, 2 & 3"R only) BP NPT (1 1/2, 2 & 3"R only) NP ISO-16 16 ISO-10 10 ISO-14 (ISO-10/4 Holes) 14 ANSI-125 A1 JIS-10 J1 BST-D BD</p> <p>Plastic Tubing & Fittings PP Plastic Tubing & Brass Fittings PB</p> <p>R.S. 10 Lit R01 R.S. 1 Gal RG3 R.S. 100 Lit R02 R.S. 10 Gal RG4 R.S. 1 m³ R03 R.S. 100 Gal RG5 R.S. 100 Lit+10 Lit R12 R.S. 10+1 Gal G34 R.S. 1 m3+1100 Lit R23 R.S. 100+10 Gal G45 O.E. 1 Lit P01 O.E. 0.1 Gal PG2 O.E. 10 Lit P10 O.E. 1 Gal PG3 O.E.+R.S. 1+100 Lit PQ1 O.E.+R.S. 0.1+10 Gal P4G O.E.+R.S. 10 Lit+1 m³ P13 O.E.+R.S. 1+100 Gal P5G R.S. No Pulse RNP R.S. No Pulse Gal RNG</p> <p>R.S. = Reed-Switch O.E. = Opto-Electric</p> <p>Plastic Control Accessories K 3-Way Control X Manual Selector Z Homologation Approved L</p> <p>Other attributes available on request</p>													

Flow Chart

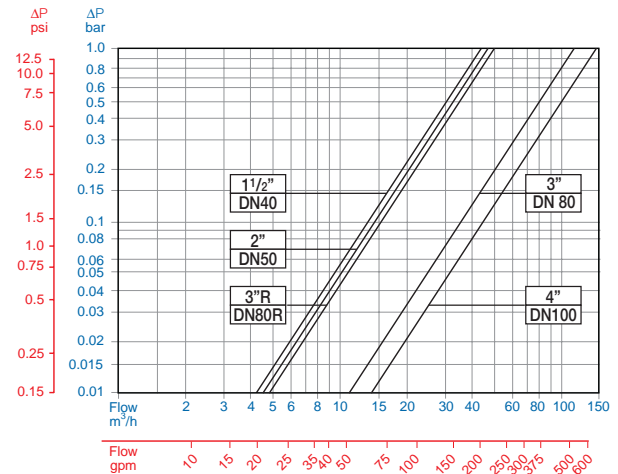

Operation

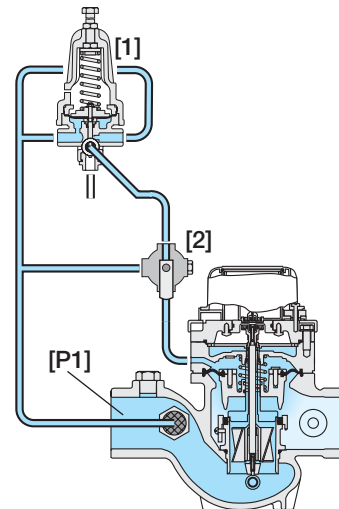

The Hydrometer continuously transmits flow data to the irrigation controller. The Pressure Sustaining Pilot [1] commands the Hydrometer to throttle closed when Upstream Pressure [P1] drops below setting, and to open fully when [P1] rises above pilot setting. The Manual Selector [2] enables local manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC9AEMO-30KX 05