



PRESSURE REDUCING SYSTEM



With Electric Back-up Valve, Low Flow Bypass and Pressure Relief Valve

Model 72S-B2E

72S-B2E is potable water pressure reducing system that combines electrically operated emergency backup valve, relief device and integral off peak flow modulation. The system reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand or varying upstream pressure. It protects the consumers from excessive pressure and ensures continues water supply in emergency situations.

The 72S-B2E system consists of BERMAD 700 valves and combines main pressure reducing valve with a "hot backup" PRV that kicks over to operation by an electrical signal and switches an alarm signal in case of main PRV malfunction.

BERMAD 700 series valves are hydraulic, oblique pattern, globe valves with double chamber unitized actuator, that can be disassembled from the body as a separate integral unit. The valves hydrodynamic body is designed for unobstructed flow path and provides excellent and highly effective modulation capacity for high differential pressure applications.

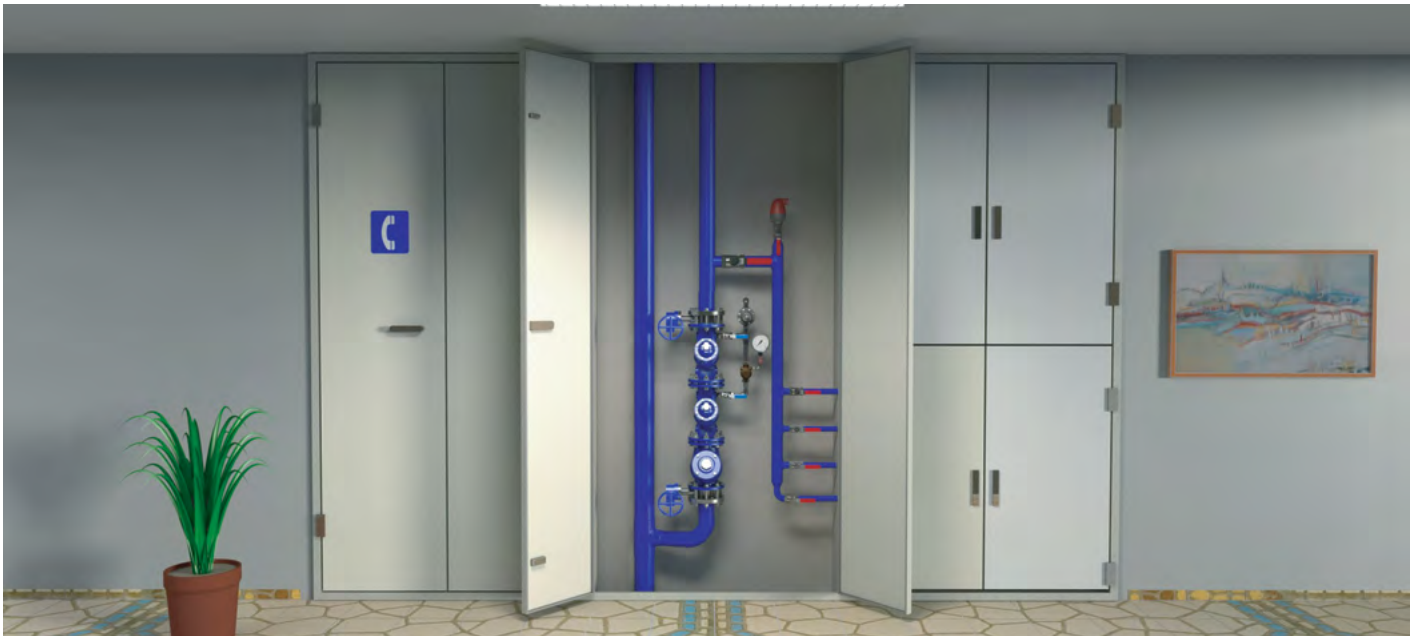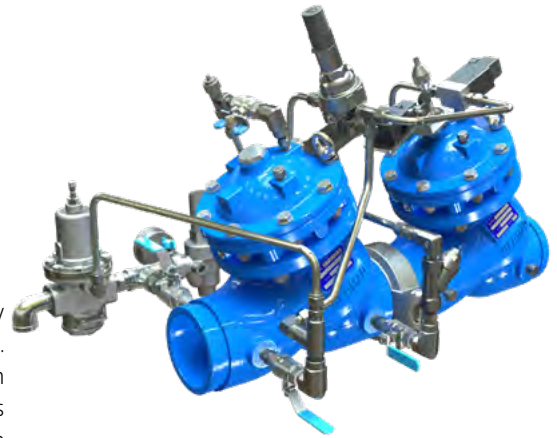

Pressure Reducing System, featuring a BERMAD 72S-B2E system to reduce high incoming pressure to a lower downstream set-point while minimizing the possibility of total water shut-off, a low flow bypass for off peak demand operation and integrated relief device.

For information on other BERMAD products in this system please see the product data sheet for the BERMAD 70F and the BERMAD A30.

Typical Application

- Reduces pressure for separate pressure zones in hi-rise buildings
- Reduces incoming pressure from municipal water supply
- Minimizes water supply disruption due to PRV failure
- Allows for both "on floor" and "mechanical floor" installations to provide the most convenient access



Features and Benefits

- High Quality Construction Materials - Reliable, resilient and long lasting operation
- Robust Design - Suitable for constant, intense operation
- In-Line Serviceable - Quick and easy maintenance and service
- Line Pressure Driven - Independent operation with solenoid trigger
- Hydrodynamic Body with Unobstructed Flow Path - Minimal noise and cavitation damage
- 3-way solenoid control - Provides full opening of backup valve
- Compact Structure - Installation in confined spaces
- Integrated Low Flow and Relief Devices - Unitized factory assembled unit
- Built-in Redundancy - Safe and continuous water supply
- Backup Valve Operation Indication - Immediate notification to maintenance personnel
- Integrated by-pass and V-Port Throttling Plug - stability in wide range of flows

Technical Data

General:

End connections:

Grooved / Flanged / Threaded

Pressure Rating: 400 psi; PN25

Valve Pattern: Y (Oblique) / Angle

Working Temperature:

Cold Water up to 140°F; 60°C

Optional Higher Temperatures:

Available on request

Note: Outlet pressure range 1-6 bar; 15-90 psi.

Main Valve Materials:

Body, Cover and Partition:

Standard: Ductile Iron

Optional: Stainless Steel 316

Seat: Stainless Steel

Internals:

Stainless Steel, Tin Bronze & Coated Steel, POM

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Blue Fusion bonded epoxy

Control Trim Materials:

Control Accessories:

Stainless Steel / Bronze & Brass

Tubing: Stainless Steel / Copper

Fittings: Stainless Steel / Brass

Solenoid:

Body: Stainless Steel / Brass

Elastomers: Synthetic Rubber

Enclosure: Molded Epoxy

* For other optional material consult BERMAD.

** Materials may vary according to sanitary standard.

How To Order

Please Specify the requested valve in the following sequence:

BC - 2" - 72S-B2E - 00 - P2 - Y - C - VI - EB - 4AC - NN - N

Segment	Model	End Connection	Standard	Code	Coating	Code	Additional Attributes (Multiple Options Permitted)	Code
BC	72S-B2E	Up to 250 psi / PN16	ANSI C606	VI	Epoxy Blue	EB	V-Port Throttling Plug	V
Size	Series	Grooved	BS 1387	VB	Epoxy Blue with UV Protection	EV	Valve Position Indicator	I
1½" DN40	Classic	ISO-16	ABNT16	B6	Uncoated	UC	Limit Switch	S
2" DN50	Sigma EN	ANSI 150	AST-*	S*			Flow Stem	M
2½" DN65	Sigma ES	Threaded	BSPT	BP			Double Chamber (Active)	B
3" DN80			NPT	NP			3-Way Control	X
4" DN100	Potable water Compatibility				Solenoid Voltage		St.St. 316 All Control Accessories	N
6" DN150	Code				No Solenoid	000	Pressure Gauge	6
8" DN200	Approved				24VAC/50Hz	4A	Orifice Assembly	U
10" DN250	Unregistered				24VAC/60Hz	46	Large Control Filter	F
12" DN300					24VDC	4D	In Line Filter	C
14" DN350	Orientation				220VAC/50-60Hz	2A	Manual Selector	Z
16" DN400	Code				220VDC	2D		
18" DN450	Y Oblique				110VAC/50-60Hz	5A		
20" DN500	Angle				110VDC	5D		
24" DN600					12VDC	1D		
	Construction Material				Main Valve Position (When Solenoid De-energized)		Tubings & Fittings	
	Ductile Iron				Normally Closed	C	Copper Tubing & Brass Fittings	CB
	Stainless Steel 316				Normally Open	O	Stainless Tubing & Fittings	NN
					Last Position	P		
					Latch Solenoid	S		



NSF 61/372 USA



Bulgarkontrola Bulgaria



ACS France



GOST Russia



PZH Poland

Manufactured and Tested According to AWWA C530-12 Requirements