

Pressure Reducing Hydrometer

**Magnetic Drive
For Drip-Tape Applications**

IR-920-M0-bKZ

The BERMAD Pressure Reducing Hydrometer integrates a vertical turbine Woltman-type water meter with a diaphragm actuated hydraulic control valve. Serving as Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD IR-920-M0-bKZ accurately reduces higher upstream pressure to very low and stable preset downstream pressure.



Features and Benefits

- Integrated "All-in-One" Control Valve
 - Saves space, cost and maintenance
- Line Pressure Driven
- Pressure Reducing Servo Pilot Controlled
 - Dynamic integrated needle valve
 - Settable to 0.5 bar; 7 psi
 - Very low hysteresis
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch and Opto pulse-generating modes
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service




Typical Applications

- Computerized Irrigation Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Drip-Tape Systems
- Low Set Pressure Applications
- Volumetric Irrigation Systems

- [1] BERMAD Model IR-920-M0-bKZ establishes reduced pressure zones and measures flow.
- [2] BERMAD Relief Valve Model IR-43Q-R
- [3] BERMAD Air Valve Model ARC-A-P-I
- [4] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-920-M0-bKZ

For full technical details, refer to Engineering Section.


900 Series

Pressure Reducing
Drip-Tape

Technical Specifications

Dimensions and Weights

Size	DN Inch	40-T 1 1/2-T	50-T 2-T	50A-T 2A-T	80R-T 3R-T	80R-F 4R-F	80-F 3-F	80A-F 3A-F	100-F 4-F	100A-F 4A-F
Lg	mm inch	250 9.8	250 9.8	N.A.	250 9.8	310 12.2	300 11.8	N.A. N.A.	350 13.8	N.A. N.A.
La	mm inch	N.A.	N.A.	120 4.7	N.A.	N.A.	N.A.	150 5.9	N.A.	180 7.1
H	mm inch	270 10.6	277 10.9	300 11.8	277 10.9	298 11.7	382 15.0	402 15.8	447 17.6	481 18.9
C	mm inch	210 9	210 9	210 9	210 9	225 9	285 11	285 11	365 15	365 15
h	mm inch	95 3.7	95 3.7	125 4.9	79 3.1	100 3.9	123 4.8	196 7.7	137 5.4	225 8.9
M*	mm inch	67 2.6	77 3.0	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Weight	Kg lb.	6.8 15	8.8 19.4	8.1 17.4	7.3 16.1	16 35.3	26.0 57.3	25.8 56.2	37.0 81.6	36.1 78.9

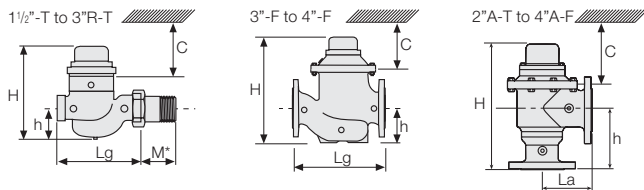

Accuracy & Flow Data

Size	Accuracy	DN inch	40 1 1/2	50 2	80R 3R	80 3	100 4
ISO 4064-1 Class			A	A		B	B
Q min (Minimum flow)	5%	m ³ gpm	0.8 3.5	0.8 3.5	1.2 5.3	1.2 5.3	1.8 7.9
Qn, ISO 4064-1 (Nominal flow)	2%	m ³ gpm	15 66	15 66	17 75	40 176	60 264
Qper=Q3 (Permanent flow)	2%	m ³ gpm	25 110	40 176	40 176	100 440	160 704

Pulse Option

Size	One pulse per	Liter ; Gallon			
		1; 0.1	10; 1	100; 10	1000; 100
1 1/2-4"; DN50-100		■	▲	▲	▲

▲ R.S. = Reed-Switch ■ O.E. = Opto-Electric
Two parallel pulses are transmitted. other pulse rates are available on request.

Technical Data

Pressure Rating: 10 bar; 145 psi

Minimum Operating Pressure: 0.5 bar; 7 psi

For lower pressure requirements, consult factory

Setting Range: 0.5-1.7 bar; 7-25 psi

Setting ranges vary according to specific pilot spring. Please consult factory.


How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)


Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	1 1/2-4"	920	M0	00	G	I	BP	PG	-	PP	WAT	R12	bKZ
Other sizes available on request.													
Globe	G	Plastic Tubing & Fittings		PP	R.S.	10 Lit	R01	R.S.	1 Gal	RG3	Servo		b
Angle 90°	A	Plastic Tubing & Brass Fittings		PB	R.S.	100 Lit	R02	R.S.	10 Gal	RG4	Plastic Control Accessories		K
120° (2 1/2" & 4" only)	H				R.S.	1 m ³	R03	R.S.	100 Gal	RG5	Manual Selector		Z
BSP (1 1/2, 2 & 3"R only)	BP				R.S.	100 Lit+10 Lit	R12	R.S.	10+1 Gal	G34	Homologation Approved		L
NPT (1 1/2, 2 & 3"R only)	NP				R.S.	1 m ³ +1100 Lit	R23	R.S.	100+10 Gal	G45	Other attributes available on request		
ISO-16	16				O.E.	1 Lit	P01	O.E.	0.1 Gal	PG2			
ISO-10	10				O.E.	10 Lit	P10	O.E.	1 Gal	PG3			
ISO-14 (ISO-10/4 Holes)	14				O.E.+R.S.	1+100 Lit	PQ1	O.E.+R.S.	0.1+10 Gal	P4G			
ANSI-125	A1				O.E.+R.S.	10 Lit+1 m ³	P13	O.E.+R.S.	1+100 Gal	P5G			
JIS-10	J1				R.S.	No Pulse	RNP	R.S.	No Pulse Gal	RNG			
BST-D	BD												

R.S. = Reed-Switch O.E. = Opto-Electric

Flow Chart

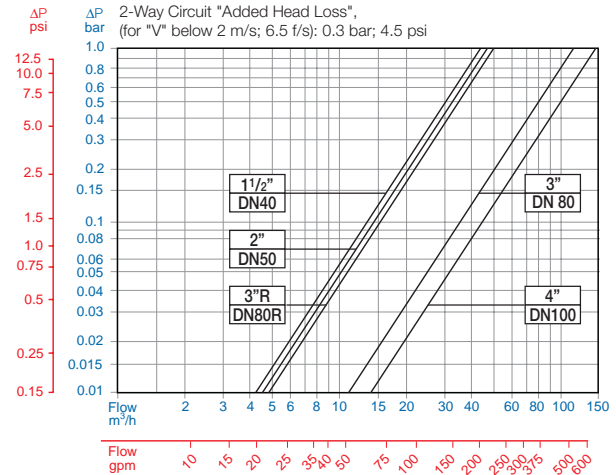

Operation

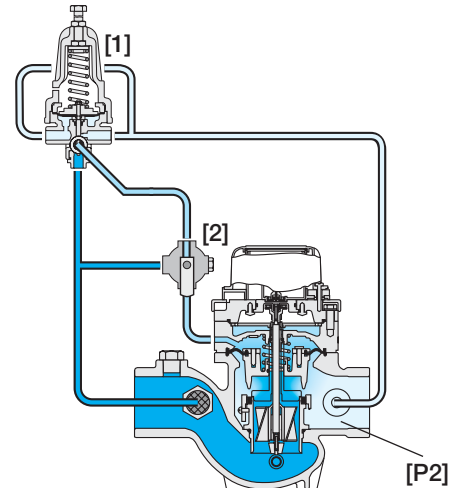

The Hydrometer continuously transmits flow data to the irrigation controller. The Pressure Reducing Servo Pilot [1] commands the Hydrometer to throttle closed, preventing downstream pressure [P2] from rising above pilot setting, and to modulate open when it drops below pilot setting. The Manual selector [2] enables local manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC9AEM0-20bKZ 05