


Level Control Valve with Bi-Level Electric Float

Hydraulically operated control valve that controls reservoir filling and reservoir level.

Reservoir filling is in response to a Bi-level electric float switch signal opening at a pre-set low level and shutting off at a pre-set high level. BERMAD 400 series valves are hydraulically operated, simple and reliable, globe valves with full bore hydrodynamic body providing an unobstructed flow path and superior performance.


The valves balanced rolling-diaphragm assembly is vulcanized with a rugged radial seal disk construction, performing as the valves only moving part.

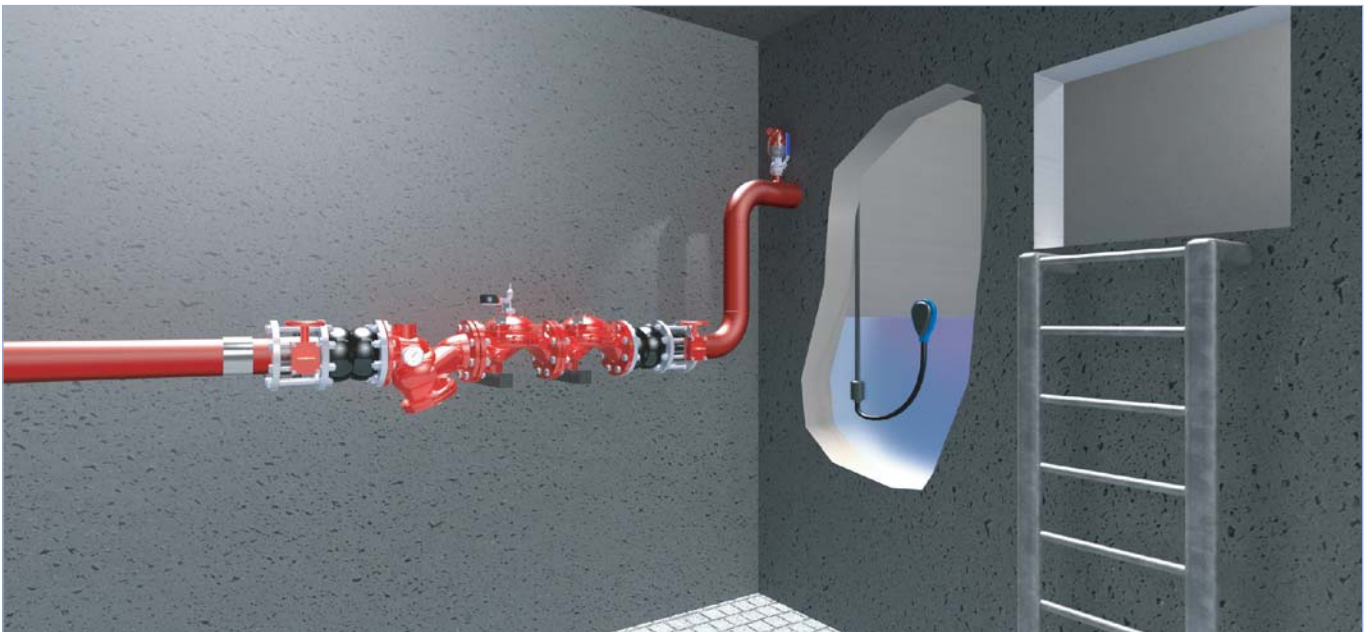

For illustration only

Typical Application

- Level control of emergency fire protection reservoirs in buildings, including basement and roof-top reservoirs, emergency water storage, etc.
- Priority and backup management of reservoirs
- Electrical emergency override in hydraulic level control systems
- Duty cycle and valve prioritizing management in multi-branch systems

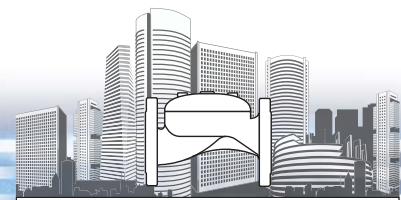

400 Series

Level Control


Model FP-450-65-BF

Features and Benefits

- High quality construction materials ensure reliable, long lasting operation
- Fully supported and balanced rolling diaphragm – low actuation pressure and excellent low flow regulation performance
- Straightforward design of three major components – easy and simple on-site inline maintenance with minimal down time
- Accurate and reliable level control; prevents reservoir overflows and cut-offs
- Ensures uninterrupted supply to building occupants dependent on the reservoir system for their water needs
- Specially designed for emergency water reservoirs where long standby periods are expected
- Electrical operation. Low voltage and low current NO and NC solenoids
- 3-way solenoid control provides powered closing under low pressure conditions

Technical Data

| Size | | Kv | A,B | C | L | H | W | | | Weight (kg) | |
|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|------|
| DN | Inch | | | | | | Thr | Fla | Gro | Th/Fl | Gro |
| 50 | 2" | 57 | 330 | 68 | 205 | 155 | 119 | 155 | 119 | 9 | 5 |
| 65 | 2½" | 78 | 340 | 110 | 205 | 178 | 129 | 178 | n/a | 10.5 | 10.5 |
| 80 | 3" | 136 | 350 | 125 | 250 | 210 | 170 | 200 | 170 | 19 | 10.6 |
| 100 | 4" | 204 | 360 | 145 | 320 | 242 | n/a | 223 | 204 | 28 | 16.2 |
| 150 | 6" | 458 | 400 | 205 | 415 | 345 | n/a | 306 | 306 | 68 | 49 |
| 200 | 8" | 781 | 430 | 260 | 500 | 430 | n/a | 365 | n/a | 125 | 125 |

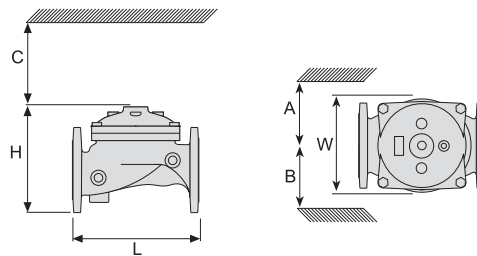

End Connections:

Grooved: ANSI/AWWA C606

Optional: Flanged ANSI B16.42 (Ductile Iron), ISO PN16

Threaded: NPT or ISO-7-Rp for 2, 2½ & 3"

Pressure Rating: Max. inlet: 250 psi (17 bar)

Valve Pattern: Globe & Angle (2, 3 & 4")

Water Temperature: Water up to 50°C (122°F)

Main Construction Materials:

Body, cover & Actuator: Ductile Iron ASTM A-536

Internals: Stainless Steel & Elastomer

Control Trim: System Brass control components / accessories

Copper & Brass tubing & fittings


Optional: Stainless Steel 316

Elastomers: Nylon fabric reinforced polyisoprene NR

Coating / colour: Electrostatic Powder Coating Polyester Red

How to Order

Please specify the requested valve in the following sequence:

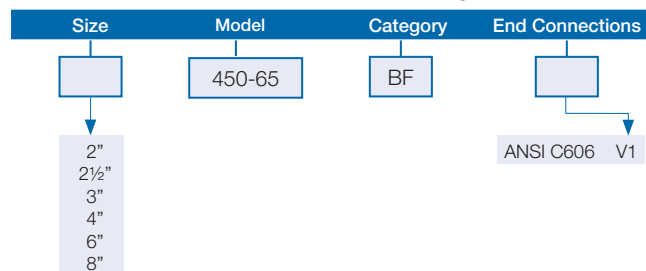

For other optional materials consult BERMAD



For full technical specifications, see Engineering section or consult BERMAD

info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC4BE12-450-65-BF