

# Pressure Reducing Valve


IR-420-R

The BERMAD Pressure Reducing Valve is a hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand or varying upstream pressure.



## Features and Benefits

- Hydraulic Pressure Control
  - Line pressure driven
  - Protects downstream systems
- Advanced Globe Hydro-Efficient Design
  - Unobstructed flow path
  - Single moving part
  - High flow capacity
- Fully Supported & Balanced Diaphragm
  - Requires low actuation pressure
  - Excellent low-flow regulation performance
  - Progressively restrains valve closing
  - Prevents diaphragm distortion
- User-Friendly Design
  - Easy pressure setting
  - Simple in-line inspection and service
  - Easy addition of control features

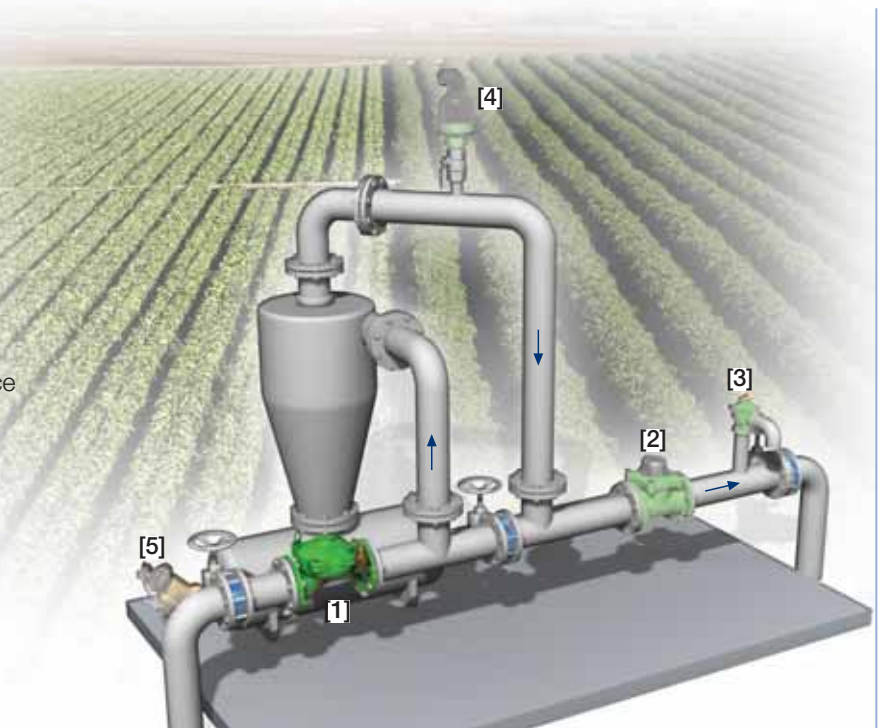


## Typical Applications

- Pressure Reducing Stations
- Low Supplied Pressure Irrigation Systems

- [1] BERMAD Model IR-420-R protecting the System
- [2] BERMAD Water Meter Model WPH
- [3] BERMAD Relief Valve Model IR-43Q-R
- [4] BERMAD Air Valve Model ARC-A-P-I
- [5] BERMAD Sediment Tank Flashing Valve Model IR 310-B

# BERMAD Irrigation



## IR-420-R

For full technical details, refer to Engineering Section.


## 400 Series

Pressure Reducing


### Technical Specifications

#### Dimensions and Weights

Size	DN Inch	80 3	100 4	150 6	200 8	250 10	300 12	350 14	400 16
L	mm	250	320	415	500	605	725	742	742
	inch	9.8	12.6	16.3	19.8	23.8	28.5	29.2	29.2
H	mm	210	242	345	430	460	635	655	965
	inch	8.3	9.5	13.6	16.9	18.1	25	25.8	38
C	mm	125	145	207	258	276	381	393	579
	inch	5	5.7	8.2	10.2	10.9	15	15.5	22.8
R	mm	100	112	140	170	202	242	260	300
	inch	3.9	4.4	5.5	6.7	8	9.5	10.2	11.8
A; B	mm	300	312	353	383	403	490	494	500
	inch	11.8	12.3	13.9	15.1	15.9	19.3	19.4	19.7
Weight	Kg	19	28	68	125	140	290	358	377
	lb.	41.9	61.7	149.9	275.6	308.6	639.3	789.2	831.1

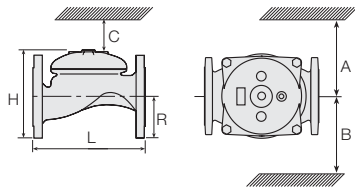

#### Flow Chart

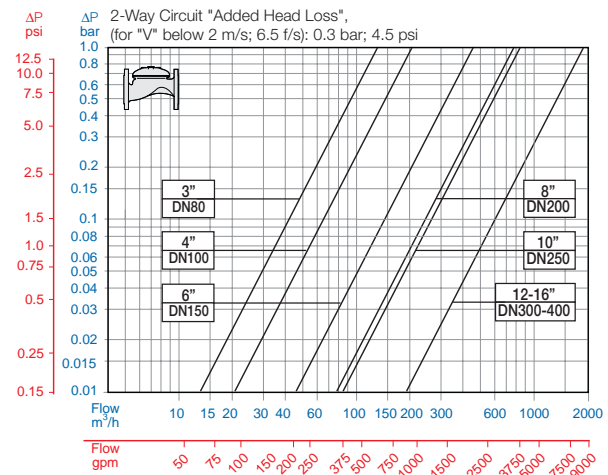

### Technical Data

Patterns and Sizes: Globe: 3-16"; DN80-400 Angle: 3-4"; DN80-100

End Connections:

Size		3"	4"	6"	8-16"
		DN80	DN100	DN150	DN200-400
Threaded	Globe	■			
	Angle	■			
Flanged	Globe	■	■	■	■
	Angle	■	■		
Grooved	Globe	■	■	■	
	Angle	■	■		

Pressure Rating: 16 bar; 232 psi

Operating Pressure Range: 0.5-16 bar; 7-232 psi

For lower pressure requirements, consult factory

Setting Range: 1-10 bar; 15-145 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

Materials:

Body and Cover:

Polyester Coated Cast or (10"; DN250 and larger) Ductile Iron

Spring: Stainless Steel


Diaphragm: Nylon fabric Reinforced NR with rugged insert

Bolts, Studs and Nuts: Zinc-Cobalt plated Steel

Control Accessories: Brass

Tubing and Fittings: Reinforced Plastic and Brass

#### Operation

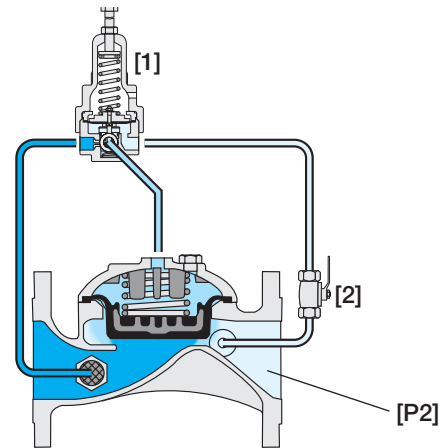

The Pressure Reducing Pilot [1] commands the main Valve to throttle closed should Downstream Pressure [P2] rise above setting, and to modulate open when it drops below setting. The downstream Cock Valve [2] enables manual closing.

### How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Additional Feature	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage -Main Valve Position	Tubing & Fittings	Additional Attributes
IR	3-16"	420	00	-	G	I	16	PG	-	PB	R
Other sizes available on request.											
Globe		G	ISO-16		16	Plastic Tubing & Brass Fittings		PB		Metal Control Accessories	R
Angle (up to 4"; DN100)		A	ISO-10		10	Copper Tubing & Brass Fittings		CB		Large Control Filter	F
			IS 14 (ISO 10/4 Holes)		14					Valve Position Indicator <sup>(1)</sup>	I
			ANSI-125		A1					Flow Stem <sup>(1)</sup>	M
			ANSI-150		A5					<sup>(1)</sup> Standard Irrigation Cover & Diaphragm are unfitted to Attributes I, M.	
			JIS-10		J1					Other attributes available on request.	
			BST-D		BD						
			Grooved (3-6"; DN80-150 only)		V1						
			Other end connections available on request								



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD.

PC4AE20-R 05