

## Pressure Reducing Hydrometer, Magnetic Drive

with Solenoid Control  
for Drip-Tape Applications


**IR-920-M0-55-bK**

The BERMAD Model IR-920-M0-55-bK integrates a vertical turbine Woltman-type water meter and a diaphragm actuated hydraulic control valve. Serving as Flow Meter and Main Valve, it controls irrigation together with the irrigation controller. The BERMAD Hydrometer accurately reduces higher upstream pressure to very low and stable preset downstream pressure. It either opens or shuts in response to an electric signal.



### Features and Benefits

- Integrated "All-in-One" Control Valve
  - Saves space, cost and maintenance
- Line Pressure Driven, Electrically Controlled On/Off
  - Protects downstream systems
- Pressure Reducing Servo Pilot Controlled
  - Dynamic integrated needle valve
  - Settable to 0.5 bar; 7 psi
  - Very low hysteresis
- Magnetic Drive with Vacuum-Sealed Register
  - Water-free gear train mechanism
  - Reed-switch and Opto pulse-generating modes
  - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
  - Saves on straightening distances
  - Maintains accuracy
- Integrated Flow Metering Calibration Device
- Simple In-Line Inspection and Service

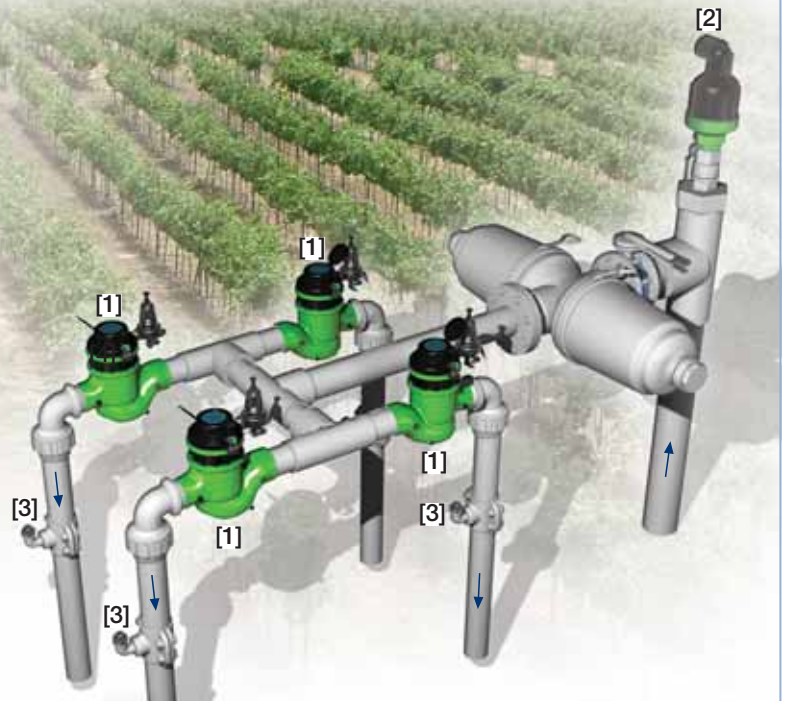

### Typical Applications


- Computerized Irrigation Systems
- Flow Monitoring & Leakage Control
- Remote and/or Elevated Plots
- Drip-Tape Systems
- Low Set Pressure Applications
- Distribution Centers

[1] BERMAD Model IR-920-M0-55-bK opens in response to electric signals, establishes reduced pressure zone, and controls irrigation shifts.

[2] BERMAD Air Valve Model ARC-A-P-I

[3] BERMAD Vacuum Breaker Model 1/2"-ARV

# BERMAD Irrigation



## IR-920-MO-55-bK

For full technical details, refer to Engineering Section.


## 900 Series

Pressure Reducing  
Drip-Tape

### Technical Specifications

#### Dimensions and Weights

Size	DN Inch	40-T 1½-T	50-T 2-T	50A-T 2A-T	80R-T 3R-T	80R-F 4R-F	80-F 3-F	80A-F 3A-F	100-F 4-F	100A-F 4A-F
Lg	mm	250	250	N.A.	250	310	300	N.A.	350	N.A.
	inch	9.8	9.8	N.A.	9.8	12.2	11.8	N.A.	13.8	N.A.
La	mm	N.A.	N.A.	120	N.A.	N.A.	N.A.	150	N.A.	180
	inch	N.A.	N.A.	4.7	N.A.	N.A.	N.A.	5.9	N.A.	7.1
H	mm	270	277	300	277	298	382	402	447	481
	inch	10.6	10.9	11.8	10.9	11.7	15.0	15.8	17.6	18.9
C	mm	210	210	210	210	225	285	285	365	365
	inch	9	9	9	9	9	11	11	15	15
h	mm	95	95	125	79	100	123	196	137	225
	inch	3.7	3.7	4.9	3.1	3.9	4.8	7.7	5.4	8.9
M*	mm	67	77	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
	inch	2.6	3.0	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Weight	Kg	6.8	8.8	8.1	7.3	16	26.0	25.8	37.0	36.1
	lb.	15	19.4	17.4	16.1	35.3	57.3	56.2	81.6	78.9

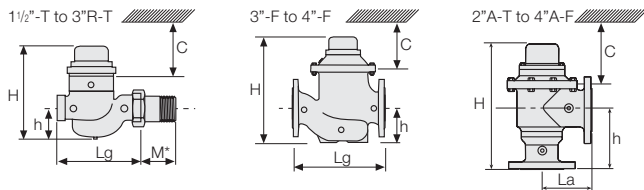

#### Accuracy & Flow Data

Size	Accuracy	DN inch	40 1½	50 2	80R 3R	80 3	100 4
ISO 4064-1 Class			A	A		B	B
Q min (Minimum flow)	5%	m³ gpm	0.8 3.5	0.8 3.5	1.2 5.3	1.2 5.3	1.8 7.9
Qn, ISO 4064-1 (Nominal flow)	2%	m³ gpm	15 66	15 66	17 75	40 176	60 264
Qper-Q3 (Permanent flow)	2%	m³ gpm	25 110	40 176	40 176	100 440	160 704

#### Pulse Option

Size	One pulse per	Liter ; Gallon			
		1; 0.1	10; 1	100; 10	1000; 100
1½-4"; DN50-100		■	▲	▲	▲

▲ R.S. = Reed-Switch    ■ O.E. = Opto-Electric  
Two parallel pulses are transmitted. other pulse rates are available on request.

### Technical Data

#### End Connections:

Threaded: 1½, 2 & 3"R; DN40, 50 & 80R  
Flanged: 3R, 3 & 4"; DN80R, 80 & 100

Pressure Rating: 10 bar; 145 psi

Minimum Operating Pressure: 0.5 bar; 7 psi

For lower pressure requirements, consult factory

Setting Range: 0.5-1.7 bar; 7-25 psi

Setting ranges vary according to specific pilot spring.  
Please consult factory.

#### Solenoid Voltage Range:

S-390 & S-400: 24 VAC, 24 VDC

S-392 & S-402: 9-20 VDC, Latch

S-982 & S-985: 12-50 VDC, Latch

Other voltages available.


For Full electric data, refer to Accessories Section.

### How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Control Categories	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage & Position	Tubing & Fittings	Dial Capacity	Pulse Rate	Additional Attributes
IR	1½-4"	920	MO	55	G	I	BP	PG	4AC	PP	WAT	R12	bK
Globe	G	9VDC -	Latch	9DS	R.S.	10 Lit	R01	R.S.	1 Gal	RG3	Servo		b
Angle 90°	A	12VDC-	Latch	1DS	R.S.	100 Lit	R02	R.S.	10 Gal	RG4	Plastic Control Accessories		K
120° (2½" & 4" only)	H	24VDC-	N.C.	4DC	R.S.	1 m³	R03	R.S.	100 Gal	RG5	Homologation Approved		L
BSP (1½, 2 & 3"R only)	BP	24VDC-	N.O.	4DC	R.S.	100 Lit+10 Lit	R12	R.S.	10+1 Gal	G34	Other attributes available on request		
NPT (1½, 2 & 3"R only)	NP	24VAC -	N.C.	4AC	R.S.	1 m³+1100 Lit	R23	R.S.	100+10 Gal	G45			
ISO-16	16	24VAC, Lightning Proof - N.C.	N.O.	4RO	O.E.	1 Lit	P01	O.E.	0.1 Gal	PG2			
ISO-10	10	24VAC, Lightning Proof - N.O.	N.O.	4RO	O.E.	10 Lit	P10	O.E.	1 Gal	PG3			
ISO-14 (ISO-10/4 Holes)	14	Other electrical ratings available on request.			O.E.+R.S.	1+100 Lit	PQ1	O.E.+R.S.	0.1+10 Gal	P4G			
ANSI-125	A1				O.E.+R.S.	10 Lit+1 m³	P13	O.E.+R.S.	1+100 Gal	P5G			
JIS-10	J1	Plastic Tubing & Fittings			R.S.	No Pulse	RNP	R.S.	No Pulse Gal	RNG			
BST-D	BD	Plastic Tubing & Brass Fittings											

### Operation

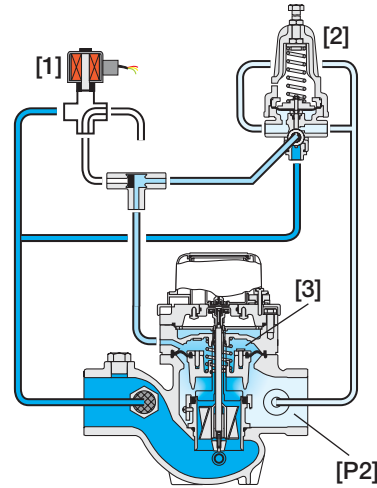

The Solenoid [1] hydraulically connects the Pressure Reducing Servo Pilot (PRSP) [2] to the Hydrometer Control Chamber [3]. The PRSP commands the Hydrometer to throttle closed, preventing Downstream Pressure [P2] from rising above pilot setting. In response to an electric signal, the solenoid switches, directing line pressure into the control chamber, and thereby causing the Hydrometer to shut. The Solenoid also features local manual closing.



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. P09AEM0-20-55bK 05