




PRESSURE REDUCING VALVE

with Solenoid Control

Model BC-720-55-P

Hydraulically operated, diaphragm actuated Pressure Reducing Valve with Solenoid Control that reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand or varying upstream pressure. The valve opens and shuts off in response to an electric signal.

BERMAD 700 series valves are hydraulic, oblique pattern, globe valves with double chamber unitized actuator, that can be disassembled from the body as a separate integral unit. The valve's hydrodynamic body is designed for unobstructed flow path and provides excellent and highly effective modulation capacity for high differential pressure applications.

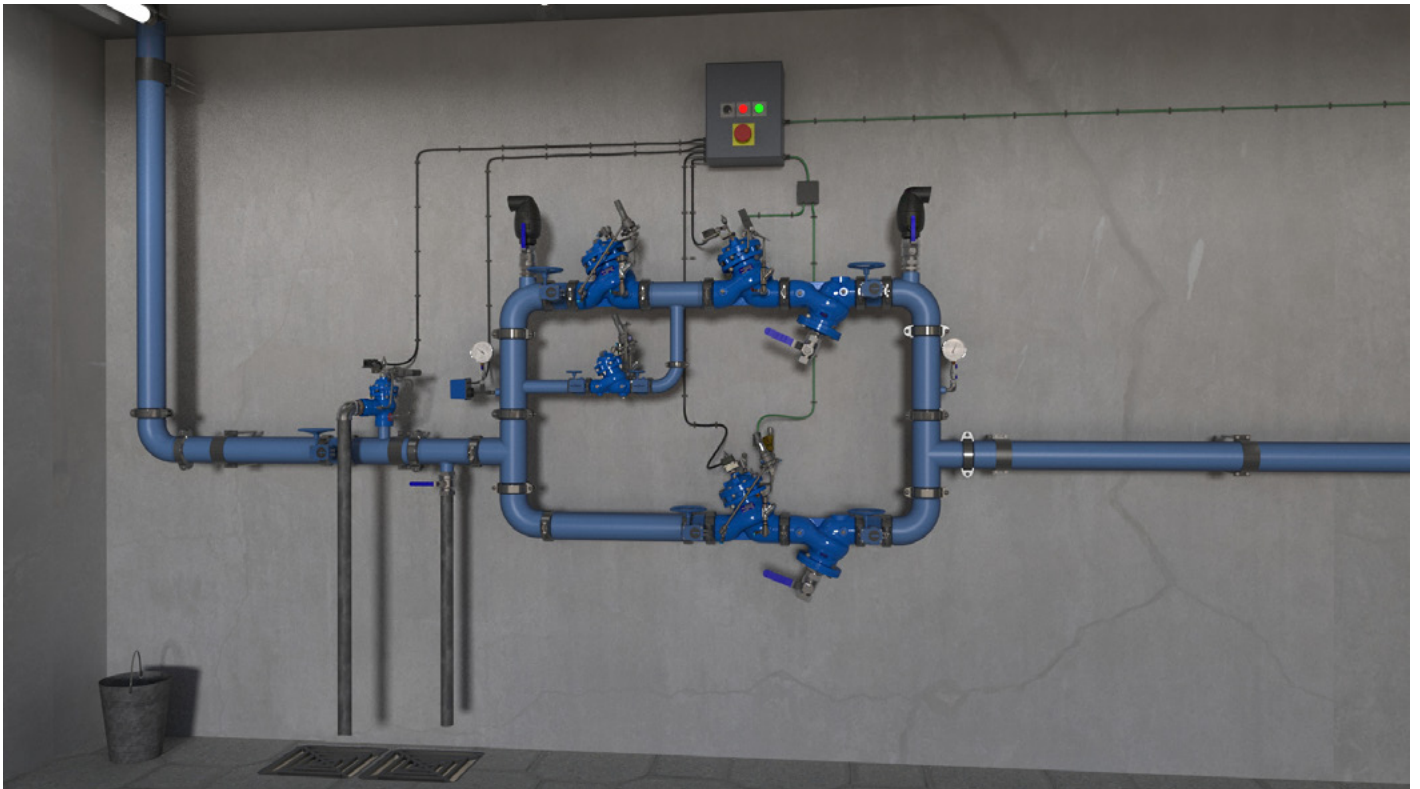

Pressure Reducing Station with Block Valve and Automatic Backup. In case of abnormal pressure rise detected by the PS the system switches

automatically between the active branch and the backup branch and an indication is sent to the BMS.

Typical Application

- Switching between "on-duty" valves is pressure reducing systems
- Routing flow to priority or emergency system branches
- Pressure zone isolation



Features and Benefits

- High Quality Construction Materials - Reliable, resilient and long lasting operation
- Robust Design - Suitable for constant, intense operation
- In-Line Serviceable - Quick and easy maintenance and service
- Line Pressure Driven - Independent operation, no external power needed
- Unitized Actuator Assembly - Minimal downtime
- Hydrodynamic Body with Unobstructed Flow Path - Minimal noise and cavitation damage
- Protected Diaphragm - Minimizes chance of damage caused by debris in the pipeline
- 2-Way Control Loop - Immediate, accurate response to sudden system variations
- Adjustable Pilot - Easy field pressure setting and calibration
- V-Port Throttling Plug - Low flow stability

Technical Data

General:

End connections:

Grooved / Flanged / Threaded

Pressure Rating: 400 psi; PN25

Valve Pattern: Y (Oblique) / Angle

Working Temperature:

Cold Water up to 140°F; 60°C

Optional Higher Temperatures:

Available on request

Main Valve Materials:

Body, Cover and Partition:

Standard: Ductile Iron

Optional: Stainless Steel 316

Seat: Stainless Steel

Internals:

Stainless Steel, Tin Bronze & Coated Steel

Diaphragm:

Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Blue Fusion bonded epoxy

Control Trim Materials:

Control Accessories:

Stainless Steel / Bronze & Brass

Tubing: Stainless Steel / Copper

Fittings: Stainless Steel / Brass

Solenoid:

Body: Stainless Steel / Brass

Elastomers: NBR or FPM

Enclosure: Molded Epoxy

* For other optional material consult BERMAD.

** Materials may vary according to sanitary standard.

How to Order

Please Specify the requested valve in the following sequence:

BERMAD Segment	Size ¹	Model	Series	Approval Group	End Connections & Pressure Rating	Solenoid	Ordering code would be						
BC	4"	720-55	EN	P1	16	4AC	BC-4"-720-55-EN-P1-16-4AC						
Buildings & Constructions	Inch mm		Series	Potable Water ²	Up to 250 psi / PN16		Solenoid Configuration						
	1½" 40	Classic	00	European Standards	P1	Grooved		ANSI C606	VI	24V ⁴	Normally Closed ³	AC 50Hz	4AC
	2" 50	Sigma EN	EN	NSF 61/372	P2			BS 1378	VB			AC 60Hz	46C
	2½" 65	Sigma ES	ES	Australia Standards	P3	Flanged		ISO-16	16			DC	4DC
	3" 80			Unregistered	P0			ABNT16	B6	Normally Open ³	AC 50Hz	4AO	
	4" 100					ANSI 150		A5	AC 60Hz				460
	6" 150					AST-*		S*	DC				400
	8" 200					Threaded		BSP	BP				
	10" 250							NPT	NP				
	12" 300					250-400 psi / PN25							
					Grooved	ANSI C606	V2						
						BS 1378	VB						
					Flanged	ISO-25	25						
						ABNT25	B2						
						ANSI 300	A3						
					Threaded	BSP	PH						
						NPT	NH						

1. Larger sizes available on request
2. BERMAD complies with a wide range of international potable water standards. Please consult with BERMAD about compliance.
3. Valve Position when Solenoid is De-Energized
4. Other voltage available.



NSF 61/372 USA



Bulgarkontrola Bulgaria



ACS France



GOST Russia



PZH Poland

The information contained herein may be changed by Bermad without notice. Bermad shall not be held liable for any errors.

© Copyright 2007-2018 Bermad CS Ltd. July 2018