



PRESSURE REDUCING VALVE

WITH HYDRAULIC CONTROL

Model IR-220-50-3W-XZ

The BERMAD Pressure Reducing Valve with Hydraulic Control is a hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to lower constant downstream pressure and opens fully upon line pressure drop. It either opens or shuts in response to a remote pressure command.



[1] BERMAD Model IR-220-50-3W-XZ Opens upon pressure drop, and establishes reduced pressure zone protecting laterals and distribution line.

[2] BERMAD Combination Air Valve Model IR-C10

All images in this catalog are for illustration only

Features & Benefits


- Line Pressure Driven, Hydraulically Controlled
 - Protects downstream systems
 - Opens fully upon line pressure drop
- Smooth valve opening and closing
 - Accurate and stable regulation
 - Low operating pressure requirements
- Plastic Globe Hydro-Efficient Valve
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
 - Highly durable, chemical and cavitation resistant
- Unitized Flexible Diaphragm and Guided Plug
 - Excellent low flow regulation performance
 - Prevents diaphragm erosion and distortion
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
- User-Friendly Design
 - Simple in-line inspection and service

Typical Applications

- Computerized Irrigation Systems
- Drip Systems
- Pressure Reducing Stations
- Greenhouses Irrigation
- Systems Subject to Varying Supply Pressure
- Landscape
- Energy Saving Irrigation Systems

Operation:

The Shuttle Valve ① hydraulically connects the Pressure Reducing Pilot (PRP) ② to the Valve Control Chamber ③. The PRP commands the Valve to throttle closed should Downstream Pressure (P2) rise above setting and to open fully when it drops below setting. Upon pressure rise command, the shuttle valve automatically switches, allowing pressurization of the control chamber, which causes the main Valve to shut. The Manual Selector ④ enables manual closing.

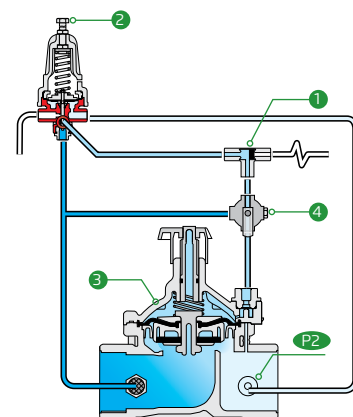



Technical Data

Sizes: 1½-2"; DN40-50

Patterns:

Globe: 1½ & 2"; DN40 & 50

Angle: 1½ & 2"; DN40 & 50

End Connections:

Female Threads BSP; NPT

Pressure Rating:

10 bar; 145 psi

Operating Pressure Range:

0.5-10 bar; 7-145 psi

Setting Range:

1-7 bar; 15-100 psi

Setting ranges vary according to specific pilot spring. Please consult factory

Standard Materials:

Body & Cover:

Black PA6+33%GF

Diaphragm: NBR

Seals: NBR

Spring: Stainless Steel

Cover Bolts: Stainless Steel


Control Accessories: Plastic

Tubing and Fittings: Plastic

Technical Specifications

Dimensions and Weights


Sizes Inch ; DN	1½" ; 40		2" ; 50	
Pattern	Globe	Angle	Globe	Angle
L (mm)	160	80	170	85
H (mm)	180	190	190	210
W (mm)	125	125	125	125
h (mm)	35	40	38	60
Weight (kg)	1	0.95	1.1	0.91

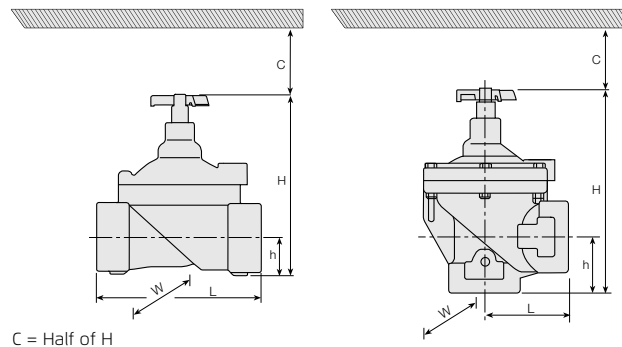

Flow Properties

Sizes	Inch DN	G	A	G	A
		1½" 40	1½" 40	2" 50	2" 50
KV		37	47	41	52

Flow Chart

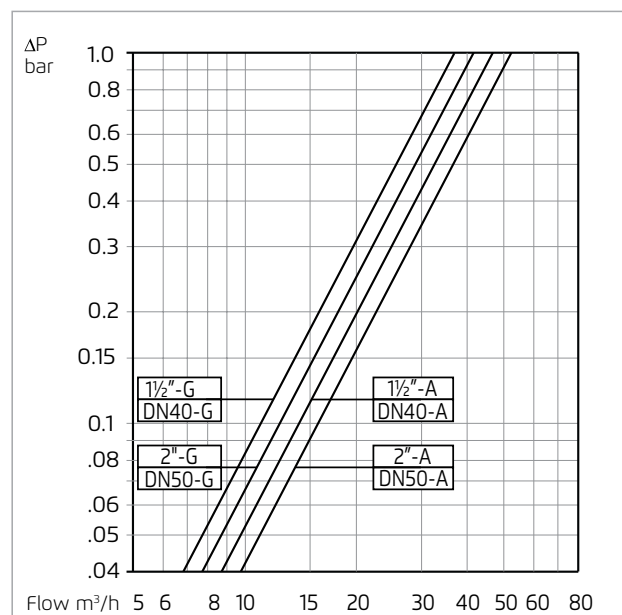

Valve flow coefficient, Kv or Cv

$$\Delta P = \left(\frac{Q}{Kv; Cv} \right)^2$$

Where:

Kv = Valve flow coefficient

Cv = Valve flow coefficient

(flow in gpm at Diff. Press. 1 psi)

Q = Flow rate (m³/h; gpm)

P = Differential pressure (bar; psi)

Cv = 1.155 Kv

