

LEVEL CONTROL VALVE

with Altitude Pilot

Model 750-80 EN/ES

Hydraulically operated control valve that controls reservoir filling and reservoir level. The valve shuts off at a pre-set reservoir high level and fully opens in response to an approximately one meter (3 ft) level drop, as sensed by the 3-Way altitude pilot mounted on the main valve.

BERMAD 700 SIGMA EN/ES series valves are hydraulic, oblique pattern, globe valves with a raised seat assembly and double chamber unitized actuator, that can be disassembled from the body as a separate integral unit. The valves hydrodynamic body is designed for unobstructed flow path and provides excellent and highly effective modulation capacity for high differential pressure applications. The valves are available in the standard configuration or with an Independent Check Feature code "2S". The 700 SIGMA EN/ES Valves operate under difficult operation conditions with minimal cavitation and noise. They meet size and dimensions requirements of various standards.



[Click here for control accessories](#)



HOME VIEW


Features and Benefits

- Designed to - stand up to the toughest conditions
 - Excellent anti-cavitation properties
 - Wide flow range
 - High stability and accuracy
 - Drip tight sealing
- Double chamber design
 - Moderated valve reaction
 - Protected diaphragm
 - Optional operation in very low pressure
 - Moderated closing curve
- Flexible design - Easy addition of features
- Obstacle free flow pass
- V-Port Throttling Plug (Optional) - Very stable at low flow
- Compatible with various standards
- High quality materials
- In-line serviceable - Easy maintenance



Major Additional Features

- Modulating altitude control – 750-82
 - Pressure sustaining – 753-80-X
 - Flow control – 757-80-XU
 - Bi-directional flow – 750-87-X
 - Full powered opening & closing – 750-80-BX
 - Closing surge prevention – 750-80-49-X
 - Bi-level altitude control – 750-86
 - Level sustaining with high sensitivity pilot – 75A-83
 - Independent Check Feature – 750-80-2S
- See relevant BERMAD publication

Typical Installation

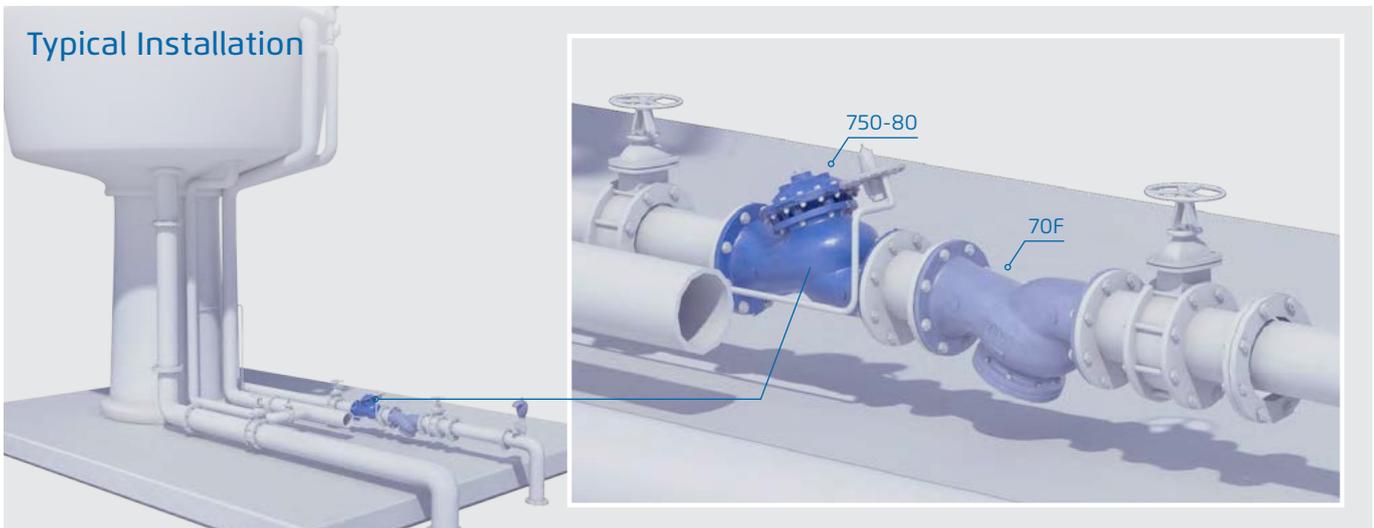

All images in this catalog are for illustration only

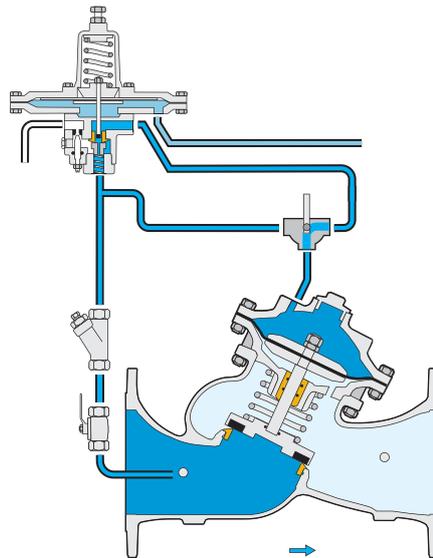

This drawing refers to 1½ – 8"; 40-200 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

- Valve Patterns:** "Y" (Globe)
- Size Range:**
- EN Series:** 1½-16"; 40-400 mm
- ES Series:** 2½-24"; 65-600 mm
- Pressure Rating:** 25 bar; 400 psi
- End Connections:** Flanged (all standard)
- Plug Types:** Flat disc, V-port, Cavitation cage
- Temperature Rating:** 60°C; 140°F for Cold water applications
- Optional higher temperature:** Available on request

Standard Materials:

- Body & actuator:** Ductile Iron
- Bolts, nuts & studs:** Stainless Steel
- Internals:** Stainless Steel, Tin Bronze & Coated Steel
- Diaphragm:** Fabric-reinforced synthetic rubber
- Seals:** Synthetic rubber
- Coating:** Dark blue Fusion bonded epoxy

Control System

Standard Materials:

- Accessories:** Stainless Steel, Bronze & Brass
- Tubing:** Stainless Steel or Copper
- Fittings:** Stainless Steel or Brass

Pilot standard materials:

- Body & Cover:** Brass or Stainless Steel
- Elastomers:** Synthetic Rubber
- Spring:** Stainless Steel or Galvanized Steel Internal
- Parts:** Stainless Steel
- Diaphragm Covers:** Fusion bonded Epoxy Coated Steel or Stainless Steel

Altitude Adjustment Range:

Code	Meter	Feet
M1	2-6	7-20
M6	2-14	7-46
M5	5-22	17-72
M4	15-35	49-115
M8	25-70	82-230

Notes

- Shut-off level repeatability: 100 mm; 4"
- Re-opening level: approx. 1m; 3ft below shut-off level.
- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing.
- Recommended maximum flow velocity: 6.0 m/sec; 20 ft/sec.
- Minimum operating pressure: 0.7 bar /10 psi. For lower pressure requirements consult factory.

