BERMAD Irrigation

100 Series h**Y**flow

Pressure Reducing Standard

Pressure Reducing Valve


IR-I20-XZ

The BERMAD Pressure Reducing Valve is a hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to lower constant downstream pressure and opens fully upon line pressure drop.



Features and Benefits

- Line pressure driven, Hydraulically Controlled
 Protects downstream systems
 - Opens fully upon line pressure drop
- Engineered Plastic Valve with Industrial Grade Design
 Highly durable, chemical and cavitation resistant
 - No internal bolts and nuts
- hYflow 'Y' Valve Body with "Look Through" Design
 Ultra-high flow capacity Low pressure loss
- Unitized Flexible Super Travel (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low opening and actuation pressure
 - Prevents diaphragm erosion and distortion
- Simple In-Line Inspection and Service

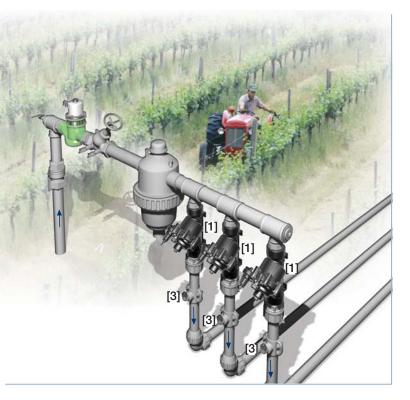

Typical Applications

- Pressure Reducing Stations
- Systems Subject to Varying Supply Pressure
- Energy Saving Irrigation Systems

- [1] BERMAD Model IR-120-XZ establishes reduced pressure zone, protecting laterals and distribution line.
- [2] BERMAD Automatic Metering Valve Model IR-900-D0
- [3] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Inc. Tel: 800-821-6825, Fax: 714-666-2533 bermad@bermadusa.com • www.bermad.com



The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC1AE20-XZ-BIG 06

BERMAD Irrigation

100 Series hyflow

Pressure Reducing

Pressure Reducing Valve


IR-120

The BERMAD Pressure Reducing Valve is a hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand or varying upstream pressure.



Features and Benefits

- Hydraulic Pressure Control
 - Line pressure driven
 - Protects downstream systems
- Engineered Plastic Valve with Industrial Grade Design
 - Adaptable on-site to a wide range of end connection sizes and types
 - Articulated flange connections eliminate mechanical and hydraulic stresses
- Highly durable, chemical and cavitation resistant
- hYflow 'Y' Valve Body with "Look Through" Design
 Ultra-high flow capacity Low pressure loss
- Unitized Flexible Super Travel (FST) Diaphragm and a Guided Plug
- Accurate and stable regulation with smooth closing
- Requires low actuation pressure
- Prevents diaphragm erosion and distortion
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service

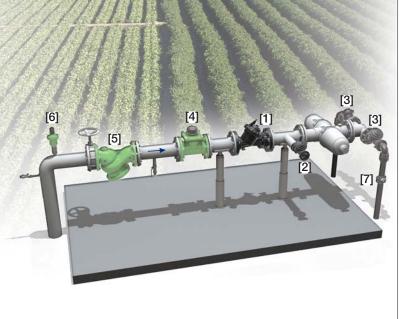

Typical Applications

- Pressure Reducing Stations
- Low Supplied Pressure Irrigation Systems
- Energy Saving Irrigation Systems

- [1] BERMAD Model IR-120 establishes reduced pressure zone, protecting filter and system.
- [2] BERMAD Relief Valve Model IR-13Q
- [3] Bermad On/Off Valve Model IR-105-Z
- [4] BERMAD Water Meter Model WPH
- [5] BERMAD Strainer Model 70F
- [6] BERMAD Air Valve Model ARC-A-I-I
- [7] BERMAD Vacuum Breaker Model 1/2" ARV



BERMAD Inc. Tel: 800-821-6825, Fax: 714-666-2533 bermad@bermadusa.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC1AE20-K-BIG 06